

# Enhanced Power Systems for CubeSats

Andrew E. Kalman   aek@pumpkininc.com

President & CTO, Pumpkin, Inc.



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop  
April 18-20, 2012*



Slide 1

# CubeSat Power

- Important components and driving forces:
  - Power collection (solar panels)
  - Power conversion (EPS)
  - Energy storage (batteries)
  - Power distribution (unregulated & regulated busses)
  - Topologies (battery chemistry, solar cells, electronics)



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
*April 18-20, 2012*



Slide 2

# Solar Panels

- Space industry at the forefront of improving solar cell efficiency ... 28% rigid TJ cells the norm in CubeSats
- CubeSats limited by available surface area
- Only a few COTS solar cell form factors are suitable for use in CubeSats
  - Cells that are too big simply don't fit (short of cutting them down to size – not recommended)
  - Cells that are small enough to fit incur additional assembly costs, reliability concerns and mass and area-coverage penalties
- No trivial way to combine multiple, dissimilar solar cell strings into a single array on a CubeSat because:
  - Strings in different orientations will have different power outputs
  - Diode ORing strings requires them to be voltage-matched
  - Each cell's strings must be closely current-matched



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
April 18-20, 2012



Slide 3

# Batteries

- CubeSats flocked to Li-Ion battery chemistry (3.7V nom.)
  - Advantages:
    - High specific energy, energy density & specific power
    - Traditional CC / CV charging algorithm
    - Low price
    - Low self-discharge
    - Ubiquitous
  - Disadvantages:
    - Narrow operating temperature range (e.g., needs heaters to charge below 0C)
    - Requires OC, OV and UV protection against fire and other hazards
  - Usable over a range of 4.2V down to 3.5V or even 3V
  - Other issues
    - Li-Po (flat, prismatic, bag) vs. Li-Ion (cylindrical, case)
    - Leverage consumer protection strategies or develop “space-grade?”

# Operating Voltages

- Initial (ca. 2000) concepts were 5V-centric
  - Assumed 5V SBCs & PC/104 would be popular (e.g. QuakeSat)
  - 5V microcontrollers were still reasonably common
  - Many peripherals, radios & sensors had +5Vdc supplies
  - ∴ a 5V power bus became a core component of many CubeSats
- But 3.3V was also quite popular ...
  - Microcontrollers were overwhelmingly moving to 3.3V operation
  - Logic families, too ... (supported wide operating ranges)
  - Not a panacea. E.g. not well-suited to e.g. radio Tx stages
  - ∴ 3.3V components became increasingly common in CubeSats
- Higher voltages?
  - Solar panels: theoretically available as source, but practically only used to charge batteries
  - HV generated locally via step-up converters, etc.
  - No simple integration of 28V bus

# Voltage Translation

- Some devices operate only at a single voltage, e.g.
  - SD Cards: Spec requires 3.3V
  - Radios: May have logic-level I/O but high-power Tx stage
  - Simple Li battery chargers (at +5V in)
- Solution: local, point-of-load regulation + level translation
  - Low-power, low-duty-cycle devices well-suited to LDOs
  - Zero-power active translation and isolation circuitry is available. Pumpkin CubeSat Kit architecture servos all attached MB devices (e.g., USB, SD Card, radio) to PPM's VCC over a 5.0-2.0 Vdc range.



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
*April 18-20, 2012*



Slide 6

# Voltage Conversion

- Linear regulators
  - Low Dropout (LDO) Regulators at sub-0.3V dropouts
  - Simple
  - Quiet
  - The larger  $V_{IN} - V_{OUT}$ , the less efficient
- Switching dc/dc converters
  - Step-up (boost), step-down (buck) and step-up/step-down (boost/buck, SEPIC)
  - More complex – higher parts count
  - Noisy (but some can be synched together)
  - The larger  $V_{IN} - V_{OUT}$ , the more efficient
- Most devices have a sweet spot for operating, performance deteriorates when deviating from the optimum

# Small-cell Solar Panels

- Small, individual solar cells (e.g., TASC)
  - Low-budget approach to solar panels
  - Not provided as CIC – require glass and interconnects
  - Small size means many options for fitting on sides of CubeSats
  - 4-, 8-, 12- and maybe even 16-cell strings possible
  - Was very labor-intensive to build, now treated as SMT parts
- Examples: CINEMA, TJHS, PhoneSat 2
  - Fill Factor: 50-60 % (?)
  - Specific power: 55 W/kg (?)
  - Stowed volume efficiency: 50 kW/m<sup>3</sup> (?)
  - Cost: <50 \$/W *for cells only* (no I, no C, no labor & other materials)




# Large-cell Solar Panels

- Large (e.g., 40x70mm, 26.62cm<sup>2</sup>, 1W BOL) individual solar cells
  - Good area coverage, minimal number of interconnects
  - Competing with the LORALs etc. for cells on open market
  - Narrow enough to fit on sides of CubeSats, leads to 2-/4-/7-cell strings on 1/2/3U CubeSats faces, respectively
  - 1U CubeSats:  $V_{OC} = 5V$ , requires boost to charge 2 Li cells
  - 2U & 3U CubeSats:  $V_{OC} = 10$  &  $17.5V_{dc}$ , requires only buck converters for 2-cell batteries when well lit, boost/buck adds some charging capability when poorly lit.
- Example: Pumpkin PMDSAS v5 7-cell panel 710-00772
  - Fill Factor: 70 %
  - Specific power: 93 W/kg ~ 10g/W
  - Cost: 800-1200 \$/W

# Large-cell Solar Arrays

- Large (e.g., 26.62cm<sup>2</sup>) individual solar cells
  - Good area coverage, minimal number of interconnects
  - Competing with the LORALs etc. for cells on open market
  - Can fit up to 8 cells per panel on a 3U deployed array
  - $V_{OC} = 20$  Vdc, good headroom over typical battery and operating voltages
- Example: Pumpkin PMDSAS v3 “Turkey Tail” array
  - Area coverage: 76 %
  - Specific power: 89 W/kg ~ 10g/W
  - Stowed volume efficiency: 142 kW/m<sup>3</sup>
  - Cost: 1700 \$/W

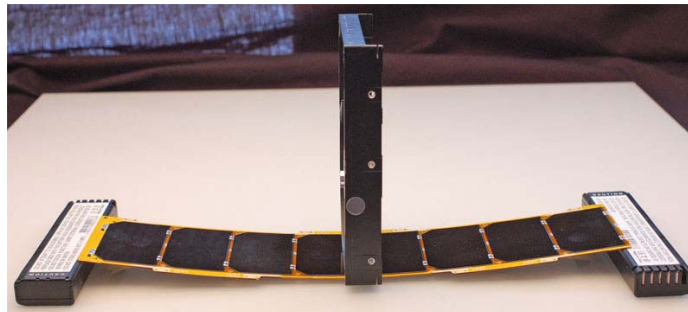

HIGH-POWER SOLAR ARRAYS | ADVANCED THERMAL REJECTION | PROPULSION

**CAERUS/MAYFLOWER**  
NEXT GENERATION CUBESAT FLIGHT TESTBED

KJ6FIX

Rapid Response | designed, manufactured, integrated, and tested in six-months

USC  
UNIVERSITY OF SOUTHERN CALIFORNIA

NORTHROP GRUMMAN  
NovaWorks  
Advanced Concepts

PUMPKIN  
applied minds



Don't leave Earth without it

strong light modular scalable customizable affordable

[www.cubesatkit.com](http://www.cubesatkit.com)


Slide 10

CubeSat Developers' Workshop  
April 18-20, 2012



# CubeSat Power Trends

- Early CubeSats (esp. 1Us) had little power, and so had to be as efficient as possible. Served by simple multi-channel EPS.
- In 2010 3Us really hit their stride, and demonstrated the utility of the Colony-class recipe: payloads of 1500cc volume and ca. 10W. Extension of panel-based EPS.
- Pumpkin's solar array work has raised CubeSat power past the 50W class ... 70+W arrays are available now.
- Pumpkin's goal with CIC is 5g/W.

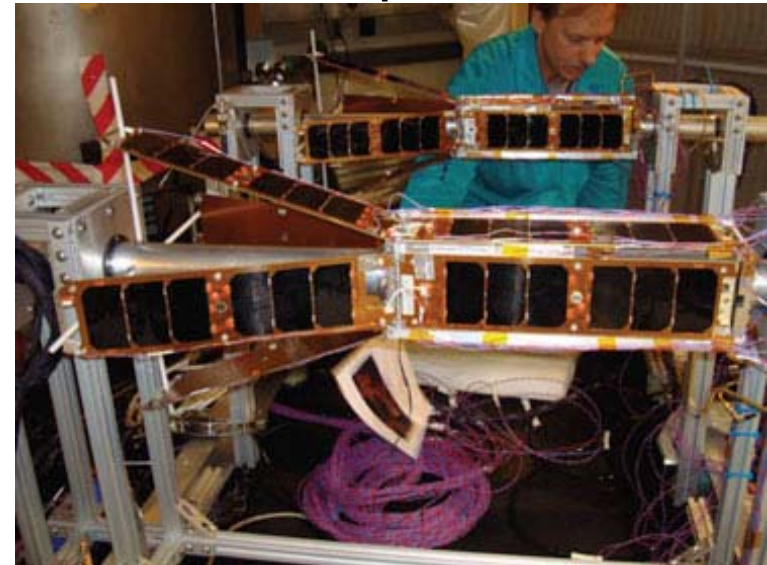

# Resultant Power Topologies

- Fixed solar panels
  - Multi-channel EPS
  - Boost/buck topologies required for end panels & USB charging
  - Max. 3 converters required (+X/-X, +Y/-Y, +Z/-Z)
  - Panel topology and regulated outputs driven by battery voltages, with some flexibility
- Deployable solar panels
  - Extension of fixed-panel scheme
  - Either higher power or more channels, depending on panel orientations
- Solar Arrays
  - Simpler, high-power EPS for entire array
  - 8SNP topology demonstrates practical & efficient cell layout ...  
20V<sub>OC</sub> drives downstream circuit and battery choices, offers flexibility beyond 7.4V Li-based batteries

## Q&A Session



Thank you for attending this Pumpkin presentation at the 2012 CubeSat Spring Developers Workshop!



Don't leave Earth without it

strong light modular scalable customizable affordable

[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
*April 18-20, 2012*



# Notice

This presentation is available online in Microsoft® PowerPoint® and Adobe® Acrobat® formats at:

[www.pumpkininc.com/content/doc/press/20120420\\_Pumpkin\\_CSDWSLO\\_2012-2.ppt](http://www.pumpkininc.com/content/doc/press/20120420_Pumpkin_CSDWSLO_2012-2.ppt)

and:

[www.pumpkininc.com/content/doc/press/20120420\\_Pumpkin\\_CSDWSLO\\_2012-2.pdf](http://www.pumpkininc.com/content/doc/press/20120420_Pumpkin_CSDWSLO_2012-2.pdf)



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
*April 18-20, 2012*



Slide 14

# Appendix

## • Speaker information

- Dr. Kalman is Pumpkin's president and chief technology architect. He entered the embedded programming world in the mid-1980's. After co-founding Euphonix, Inc – the pioneering Silicon Valley high-tech pro-audio company – he founded Pumpkin, Inc. to explore the feasibility of applying high-level programming paradigms to severely memory-constrained embedded architectures. He is the creator of the Salvo RTOS and the CubeSat Kit. He holds several United States patents. He is a consulting professor in the Department of Aeronautics & Astronautics at Stanford University and directs the department's Space Systems Development Laboratory (SSDL). Contact Andrew at [aek@pumpkininc.com](mailto:aek@pumpkininc.com).

## • Acknowledgements

- Pumpkin's Salvo, CubeSat Kit and MISC customers, whose real-world experience with our products helps us continually improve and innovate.

## • CubeSat Kit information

- More information on Pumpkin's CubeSat Kit can be found at <http://www.cubesatkit.com/>. Patented and Patents pending.

## • Copyright notice

© 2000-2012 Pumpkin, Inc. All rights reserved. Pumpkin and the Pumpkin logo, Salvo and the Salvo logo, The RTOS that runs in tiny places, CubeSat Kit and the CubeSat Kit logo, CubeSat Kit Bus, nanoLab Kit and the nanoLab Kit logo, and MISC are all trademarks of Pumpkin, Inc. Don't leave Earth without it is a service mark of Pumpkin, Inc. All other trademarks and logos are the property of their respective owners. No endorsements of or by third parties listed are implied. All specifications subject to change without notice. Unless stated otherwise, all photographs, images and illustrations are the property of Pumpkin, Inc. and may not be used without permission.

First presented at the CubeSat Developers' Workshop in San Luis Obispo, California on Friday, April 20, 2012.



Don't leave Earth without it

strong light modular scalable customizable affordable  
[www.cubesatkit.com](http://www.cubesatkit.com)

*CubeSat Developers' Workshop*  
*April 18-20, 2012*



Slide 15