



Phantom Works 

Miniature Deployable High Gain Antenna for CubeSats

Charles S. "Scott" MacGillivray

Office: (714) 372-1617
e-mail: charles.s.macgillivray@boeing.com

Mobile: (714) 392-9095
e-mail: zserfv23@gmail.com

April 22nd, 2011

The Boeing Company
Boeing Defense, Space & Security (BDS) / Phantom Works
Advanced Network & Space Systems Group
Huntington Beach, CA

This document does not contain technical data within the definition contained in the International Traffic in Arms Regulations (ITAR) and the Export Administration Regulations (EAR), as such, it is releasable by any means to any person whether in the U. S. or abroad. The Export Compliance log number for this document is RG3517-NT. (Assigned IAW PRO-4527, PRO 3439)


BOEING is a trademark of Boeing Management Company.
Copyright © 2011 Boeing. All rights reserved.

Developed Under Contract NRO000-08-C-0516

Miniature Deployable High Gain Antenna

- Applicable to High-Speed Communications and a Variety of Missions

BDS | Phantom Works 

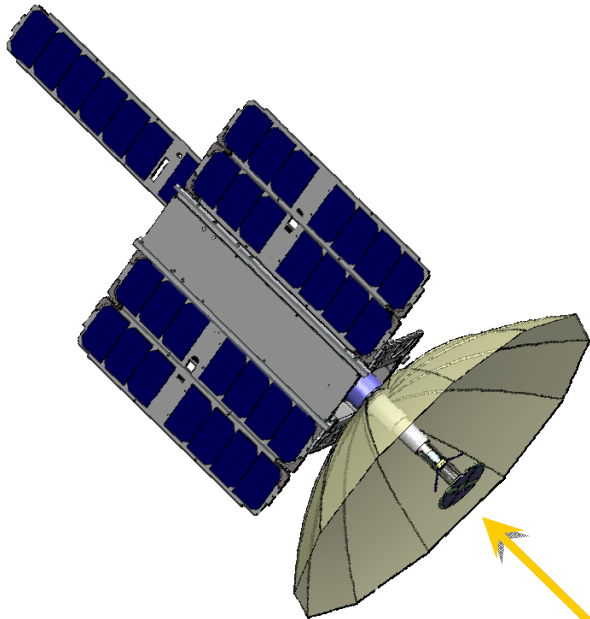

Requirement	Value	Rationale / Comments
Operating Frequency	S-Band	Represents common and popular satellite communications frequency
Gain	~18 dBi	For 400 km orbit and 5.4m Diameter Ground Terminal, supports up to 28.5 Mbps
Deployed Diameter	> 50 cm	Maximizing diameter for the given minimal stowed volume is the primary design goal
Mass	< 1.0 kg	Initial Design Goal. Mass minimized




Enables Direct Communication with End User

Miniature High Gain Antenna Opens up New Mission Opportunities and Represents a Game Changing Capability for CubeSats

S-Band Antenna Geometry and Nomenclature

- **Antenna Simulation and Analysis Performed on a Wide Array of Different Geometries**
 - Performance Driven by Small Packaging and Mechanical Deployment Requirements (not vice versa)
 - Multiple iterations to come up with feasible mechanical solution that yielded best performance

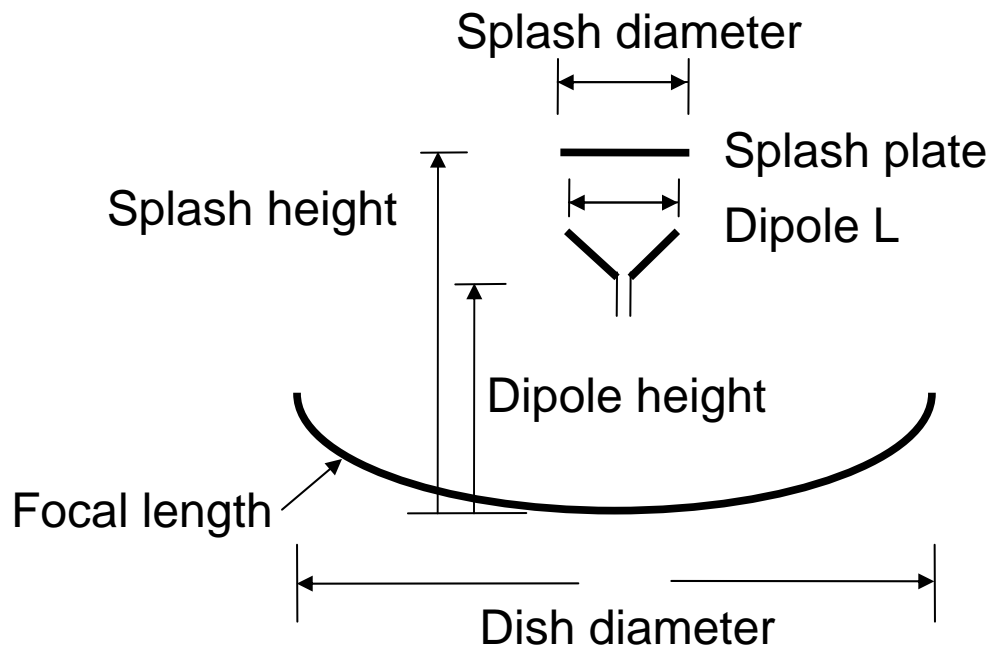


Predicted Performance of Baseline Design	
Frequency	Peak Directivity
GHz	dBic
2	16.96
2.1	17.74
2.2	18.28
2.3	18.12
2.4	18.59
2.5	18.95

Final Baseline Design

- Deployed

BDS | Phantom Works 



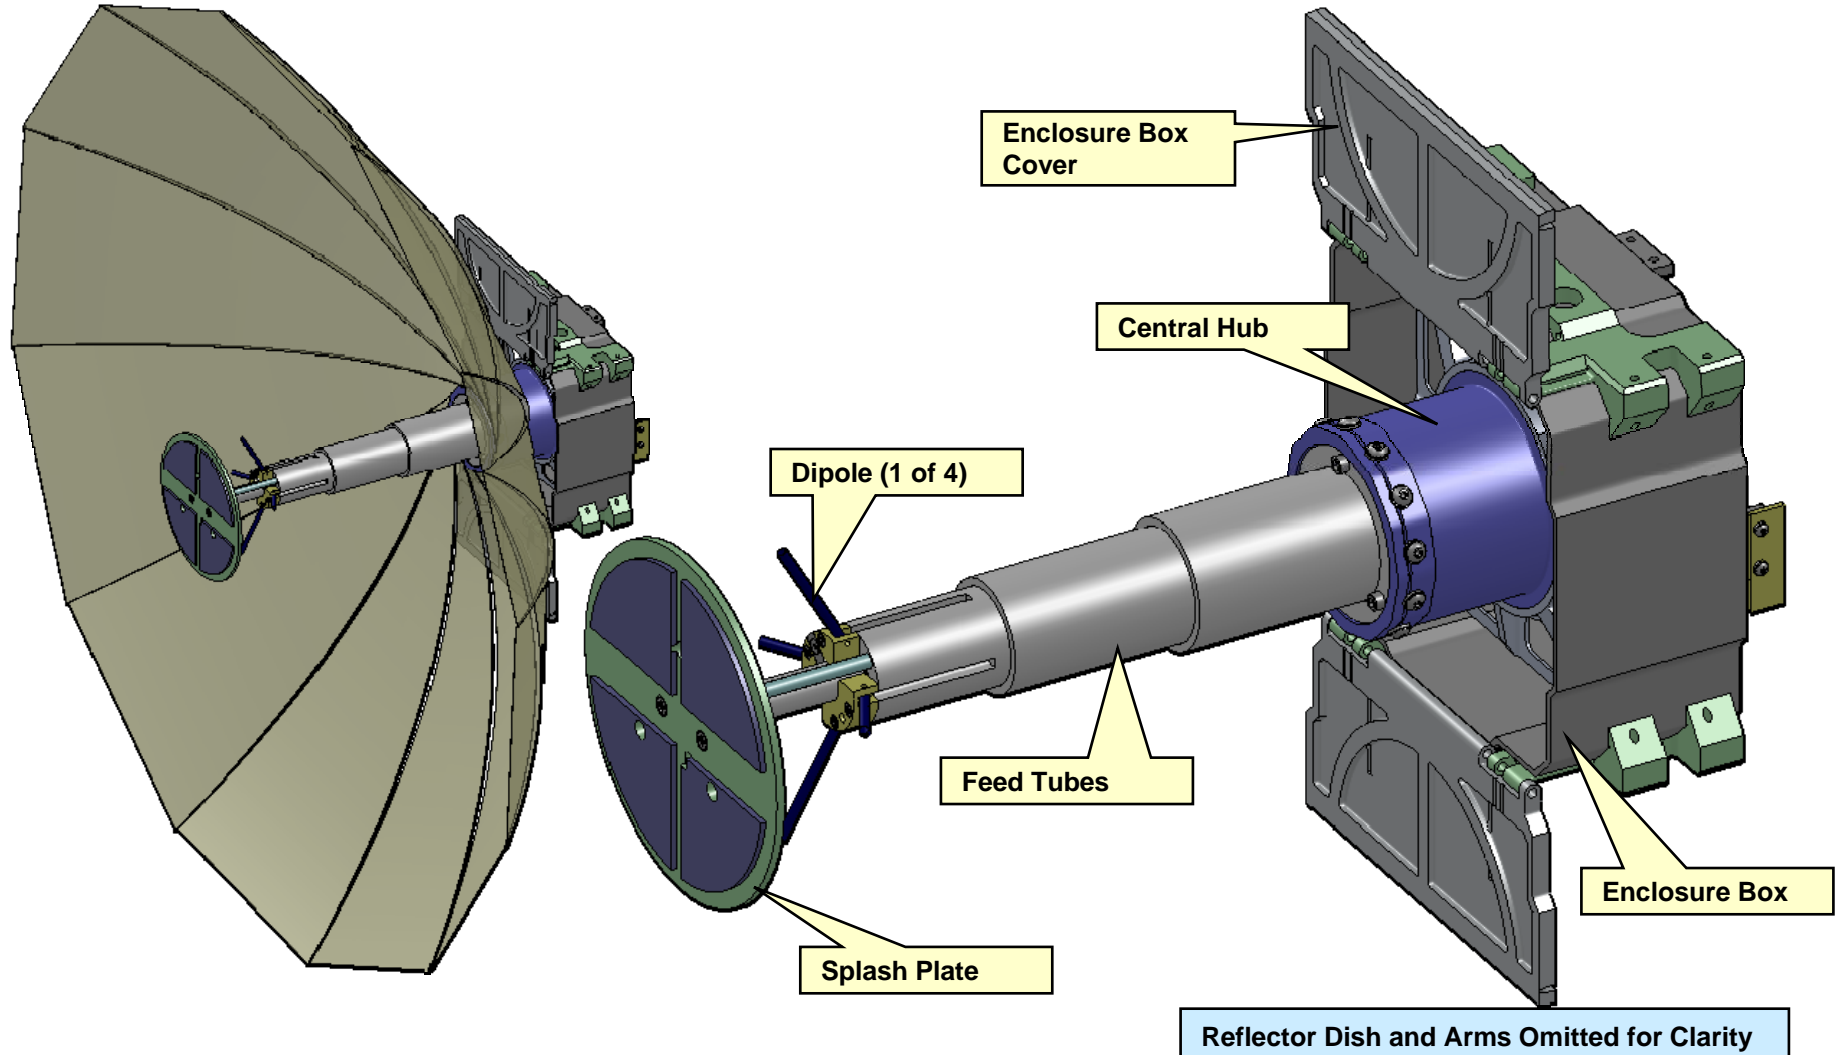


Final Baseline Design (Continued)

- Stowed

BDS | Phantom Works 

Mounting Adapter Can be Modified to Accommodate Other CubeSat Frames

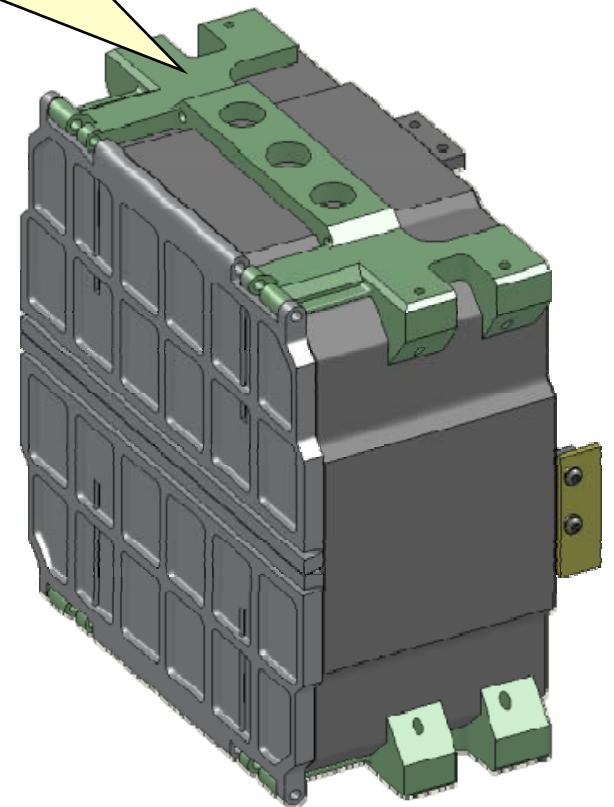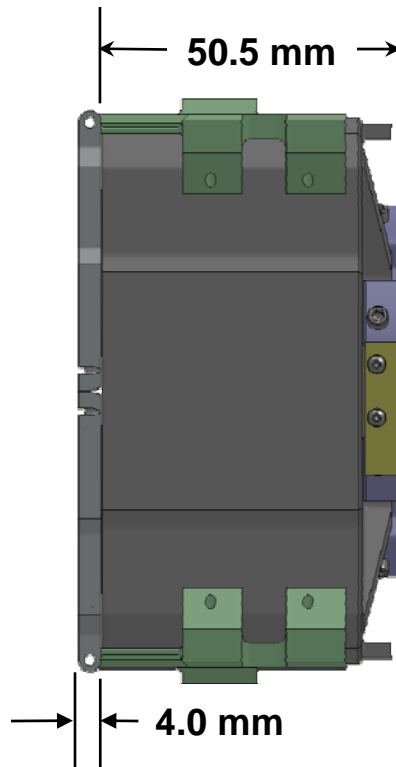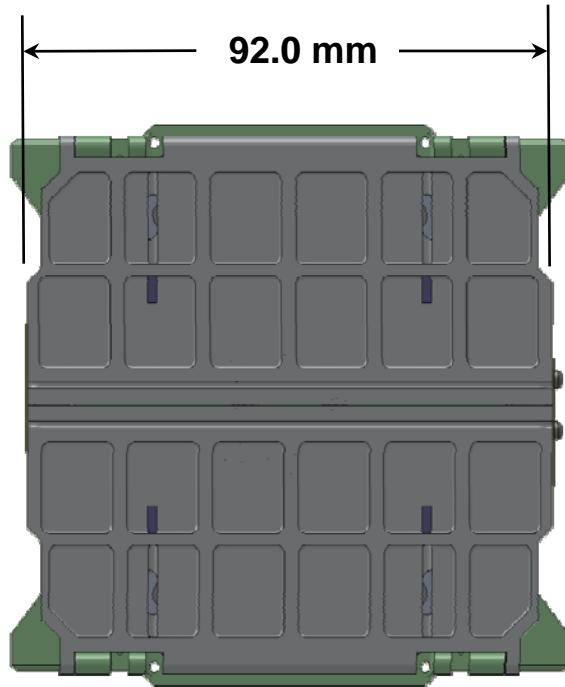

Mesh Dish Prototype Hardware

- Utilizes Conductive Mesh Fabric


BDS | Phantom Works 



Stowed Packaging


- Feed Tube and Splash Plate Removed to Show Internal Packaging

BDS | Phantom Works 

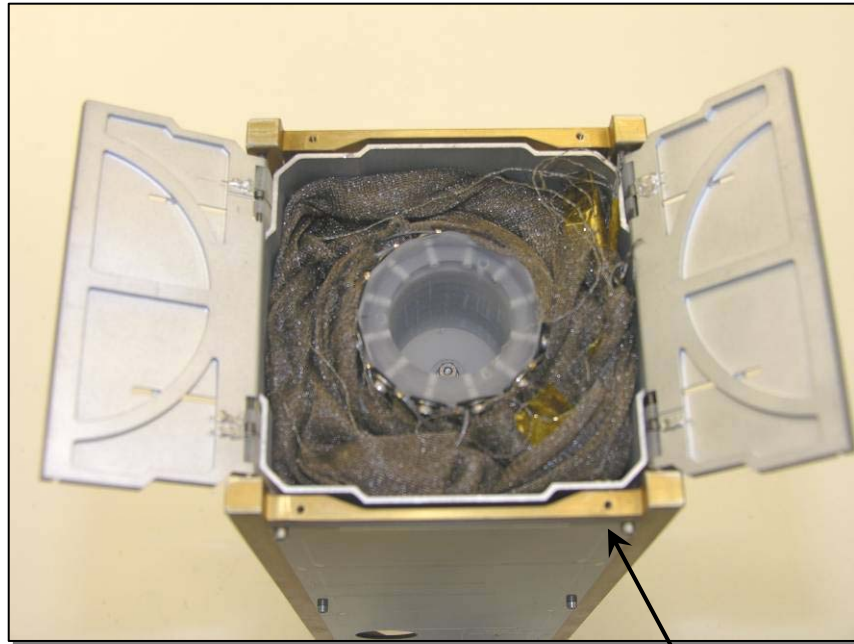

**Enclosure Box Integrated with
CubeSat Structure Frame**


- **Stowed Dish Packaging Efficiency was Better Than Expected**
 - Allows for Dish Diameters Greater than 0.50 m

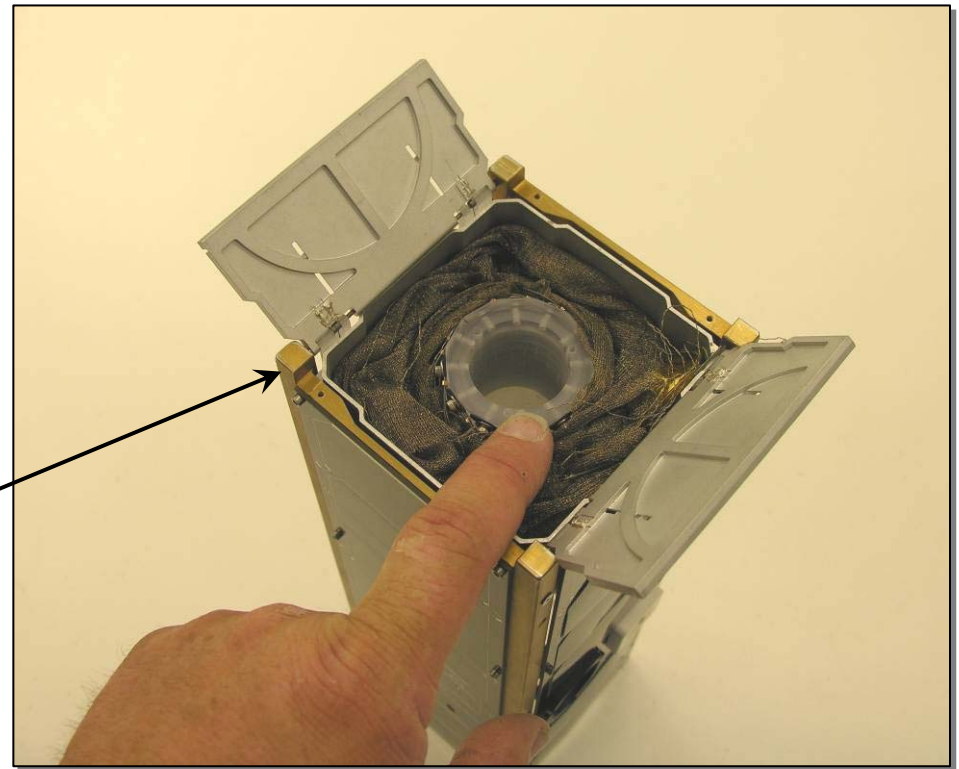

Deployable Feed Element Assembly RF Testing

- RF Test Results Showed Excellent Performance

BDS | Phantom Works 

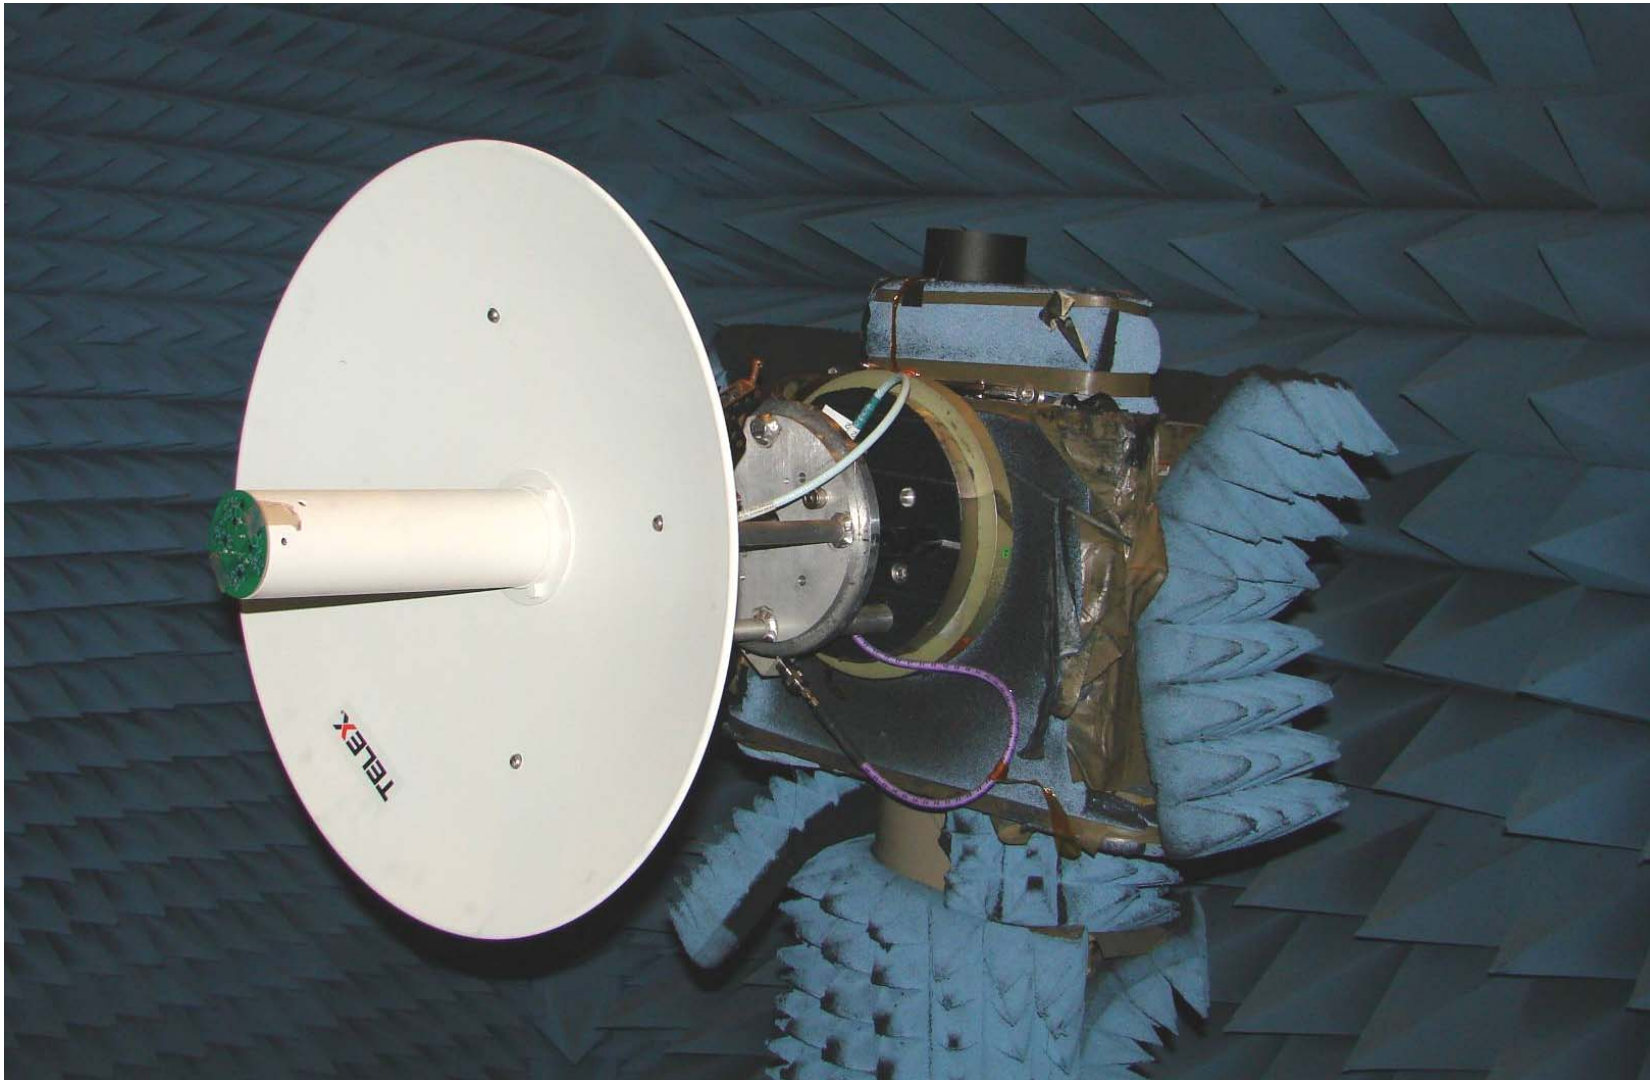

Mechanical Deployment Testing

- *Verified Initial Deployment Motions*

BDS | Phantom Works 


- **Enclosure Box Testing Successfully Demonstrated That:**
 - **Boeing “standard” burn wire PCB consistently cut monofilament restraint line**
 - **Enclosure Box doors consistently open when restraint line is cut**
 - **“First Motion” of hub moving out of box and dish arms deploy without entanglement**

- **Deployment Tests of Feed Tubes Performed**
 - **Manually testing identified areas for minor improvement that can easily be incorporated in next design revision**

Mechanical Deployment Test

- *Slow Motion Frame Sequence of Hub and Mesh Dish Deployment*

BDS | Phantom Works 

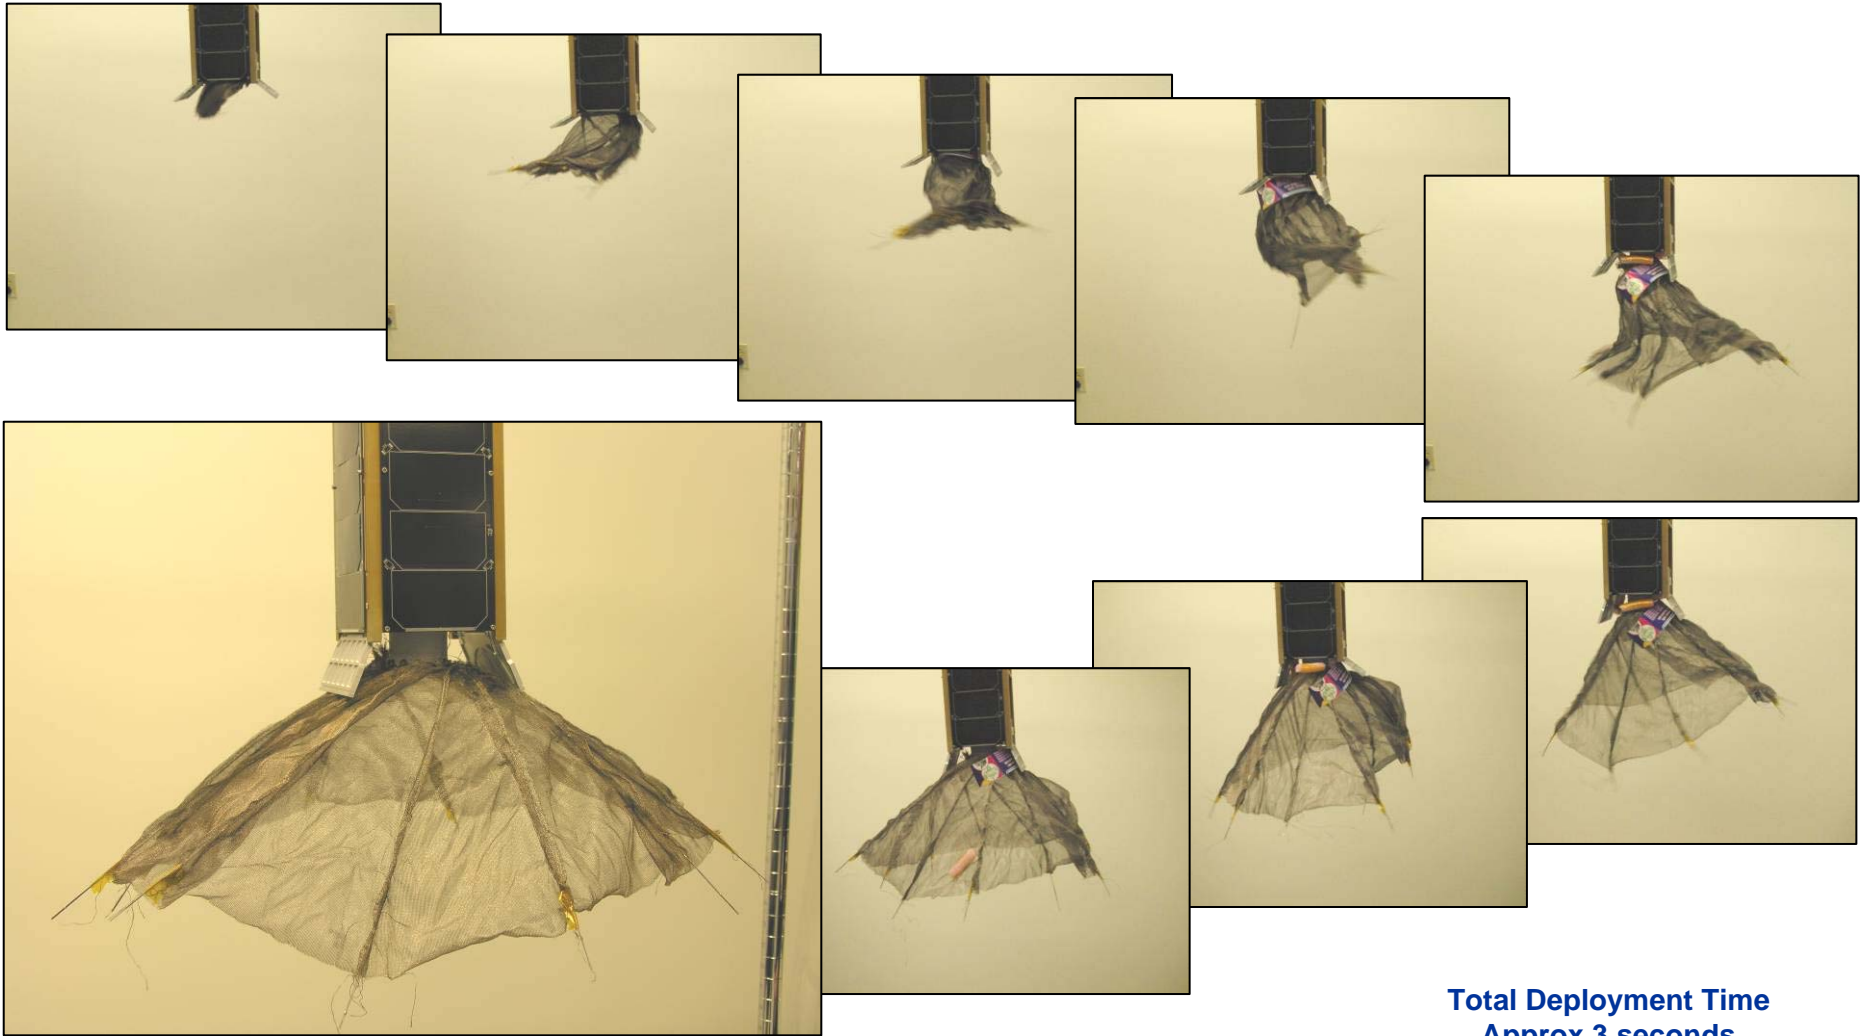

**Total Deployment Time
Approx 3 seconds**

Summary

- *Development Proved Very Successful*

BDS | Phantom Works 

- **Developed Deployable Antenna Design from Initial Concept to a Working Prototype**
 - Proved that design concept is fundamentally sound
 - Validated deployment approach and that packaging of a high gain antenna is possible within CubeSat shape and size restrictions
 - New novel RF Balun design shown to provide excellent performance
 - Packaging efficiency of mesh dish and radial arms is better than expected

- **Deployable Feed Tube Design Represented Significant Portion of Development Effort**
 - Telescoping Tube approach is straightforward
 - Stowed packaging height a function of feed length

Current Design Lays Successful Foundation for the Final Design to Support Flight Demonstration