

STAR TRACKER ON CHIP

Mikhail Prokhorov, Marat Abubekеров,
Anton Biryukov, Oleg Stekolshchikov,
Maksim Tuchin, and Andrey Zakharov

(1) Sternberg Astronomical Institute of Lomonosov Moscow State University


(2) Azmerit Ltd.




AZMERIT

Satellite Classification

Large	>1000 kg	Hubble, GLONASS
Medium	500-1000 kg	Spitzer, GPS II
Small	100-500 kg	Galex
Micro	10-100 kg	Sputnik-1, TabletSat
Nano	1-10 kg	CubeSat
Pico	0.1-1 kg	PhoneSat-1.0

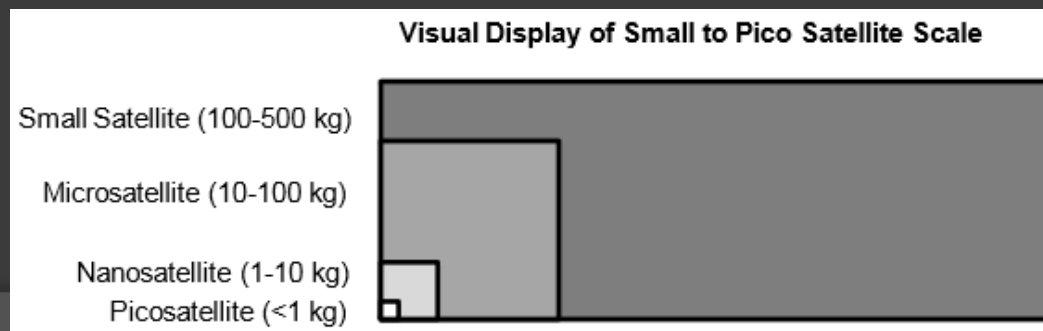


Small Satellite Examples

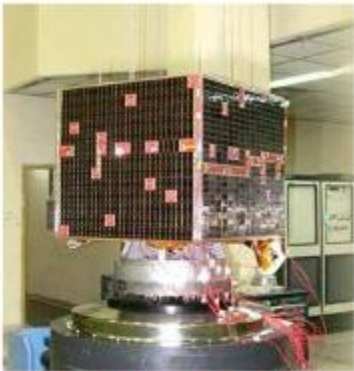

Communications

HAMSAT

Mass: 46 kg

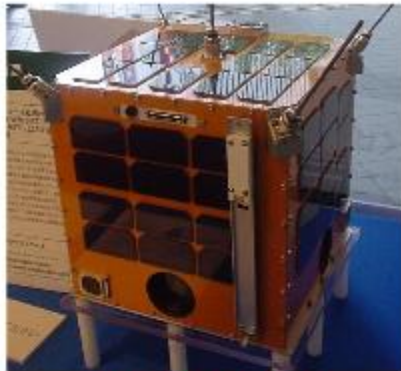

Remote Sensing

WNISAT


Mass: 10 kg



Scientific Research

UNISAT


Mass: 1.5 kg

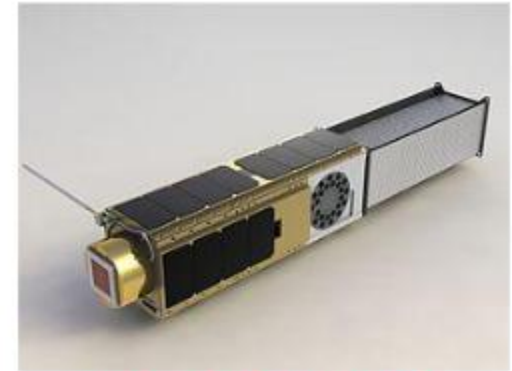

Biological Experiments

O/OREOS

Mass: 5.5 kg

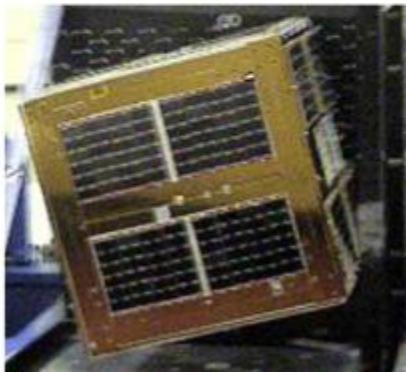

Technology Demonstration

FalconSat 1


Mass: 50 kg



Military Application

SMDC-One

Mass: 4 kg

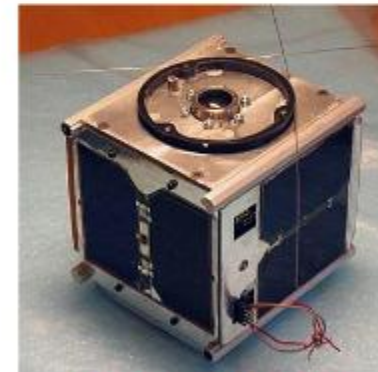

Academic Training

AAUSAT 2


Mass: 1 kg

Small Satellite Series

CubeSat

1U:


- 10×10×10cm
- up to 1.33 kg

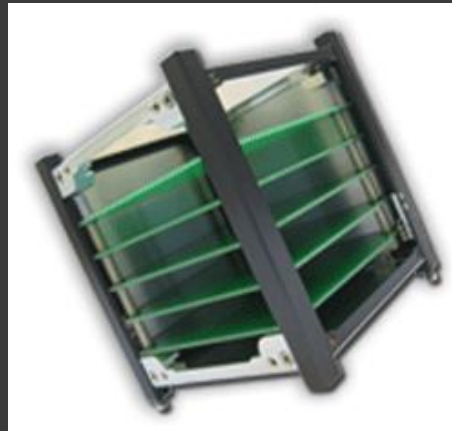

TabletSat


Bus 1U:

- up to 12 kg
- power 3W

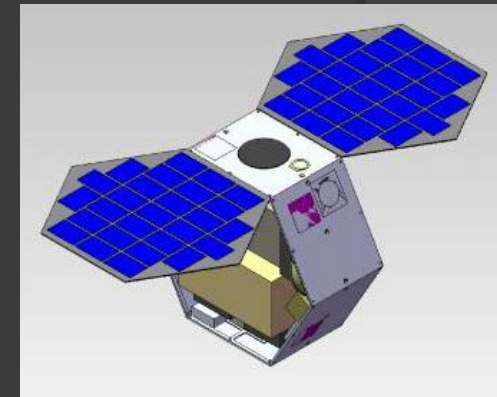

Bus 6U:

- 34×23×10cm
- up to 8 kg

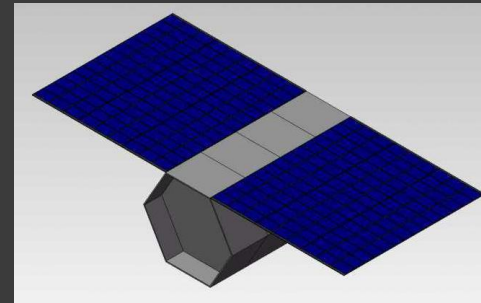

Bus 4U:


- up to 50 kg
- power 10W

~ 3 years lifetime




Market Size

Large Satellites

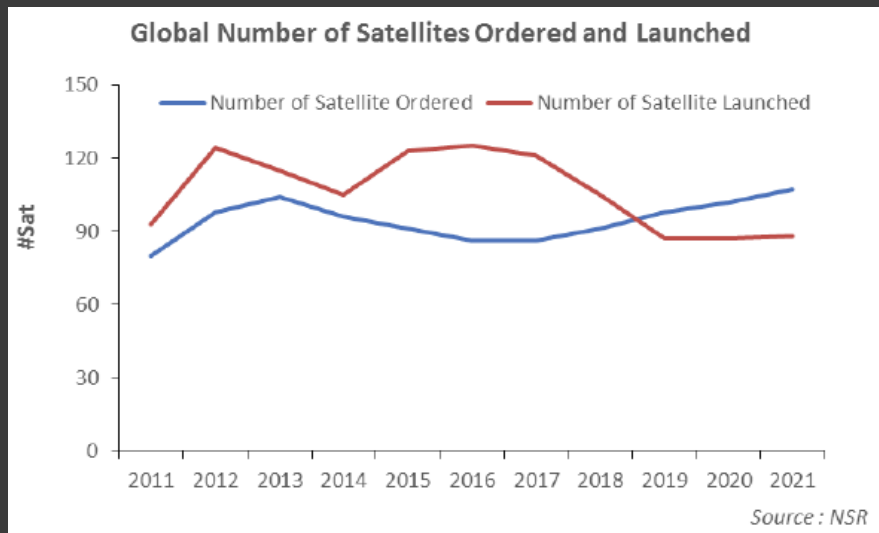

Small Satellites

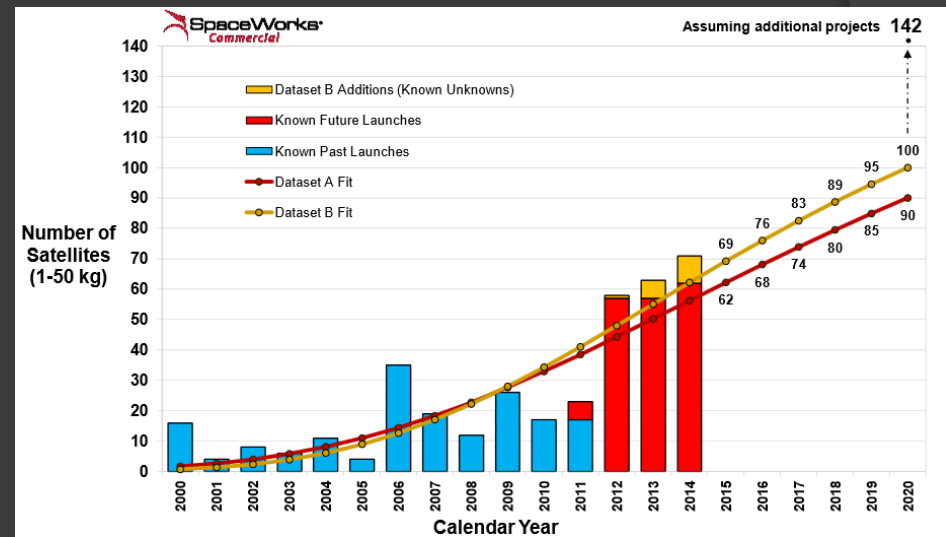


Known Micro Star Trackers


Sinclair Interplanetary
(Canada)



Berlin Space Technologies
(Germany)

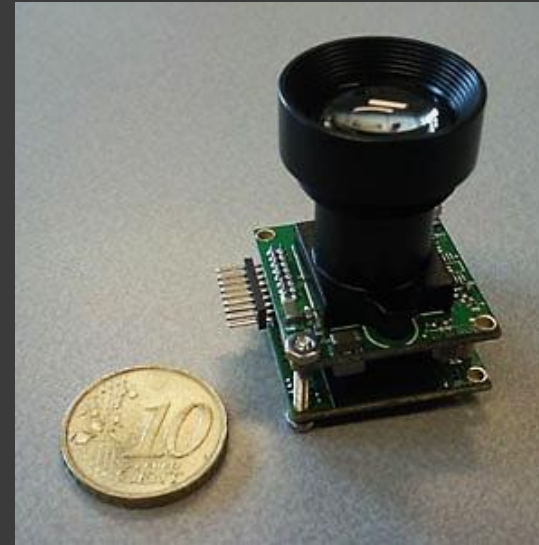

University of Kentucky

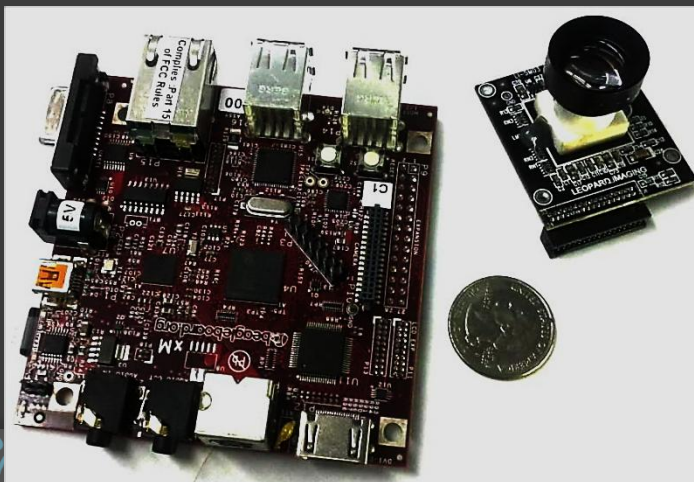

NOTE

- All 3 Star Trackers Based on 5Mpxl Aptina CMOS sensor MT9P031 (2592×1944, pixel size 2.2×2.2μm)
- Attitude accuracy ~30"–60"
- First flight: spring 2013



AZMER


ASTC-1

(Autonomous Star Tracker on Chip v.1)

Parameter	Value
CMOS Format	128×128 px
Pixel Size	20×20 μm (6.4'×6.4')
Field of View	13.7°×13.7° (193 sq. degree)
Lens (f, D/f)	10.55 mm, 1:1.2
Size, Weight	56×40×55 mm, 90 g
Power Supply	0.2 W (w/o Peltier Cooler)
Stellar Catalogue	1800 stars up to 5 ^m
Attitude Accuracy (σ_{xy} / σ_z)	5" / 60" ($\omega < 10^\circ/\text{s}$)
Update Rate	10 Hz

ASTC-1 Features


- ◎ High Attitude Accuracy:
 - 5" (1σ) in 90% of the sky
(Such accuracy will allow ASTC-1 replace “large” star trackers)
- ◎ On-Orbit Calibration

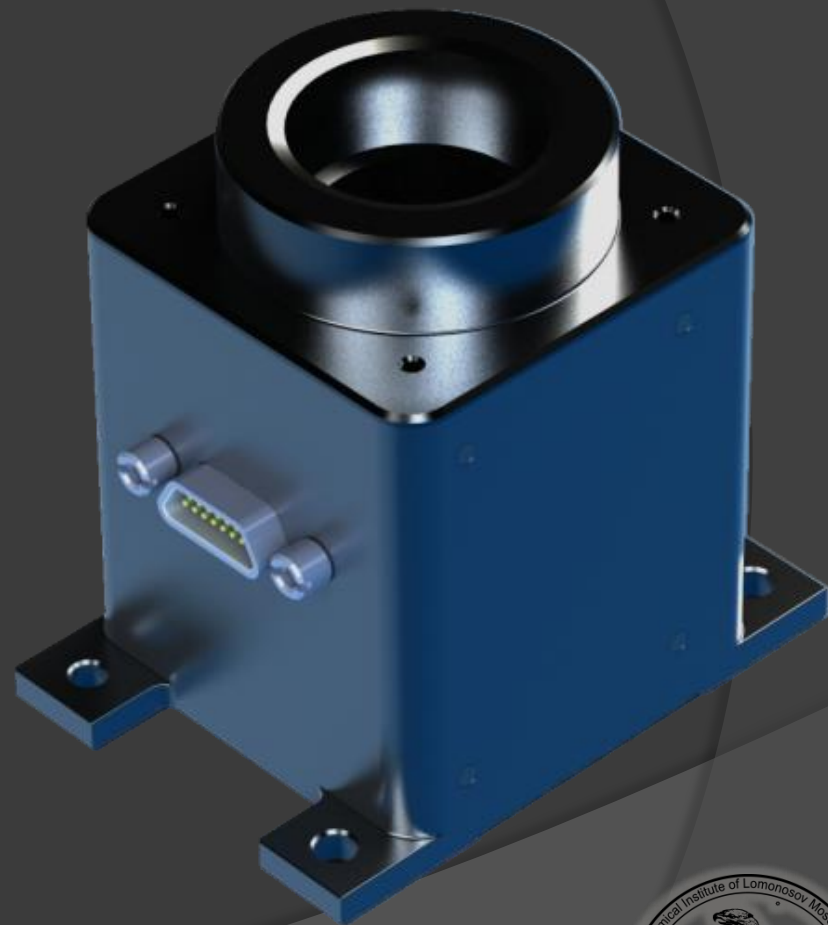

ASTC-1 Construction




ASTC-1 Assembling



**Peltier
cooler**




ASTC-1 Assembling



**128x128
CMOS**


ASTC-1 Assembling

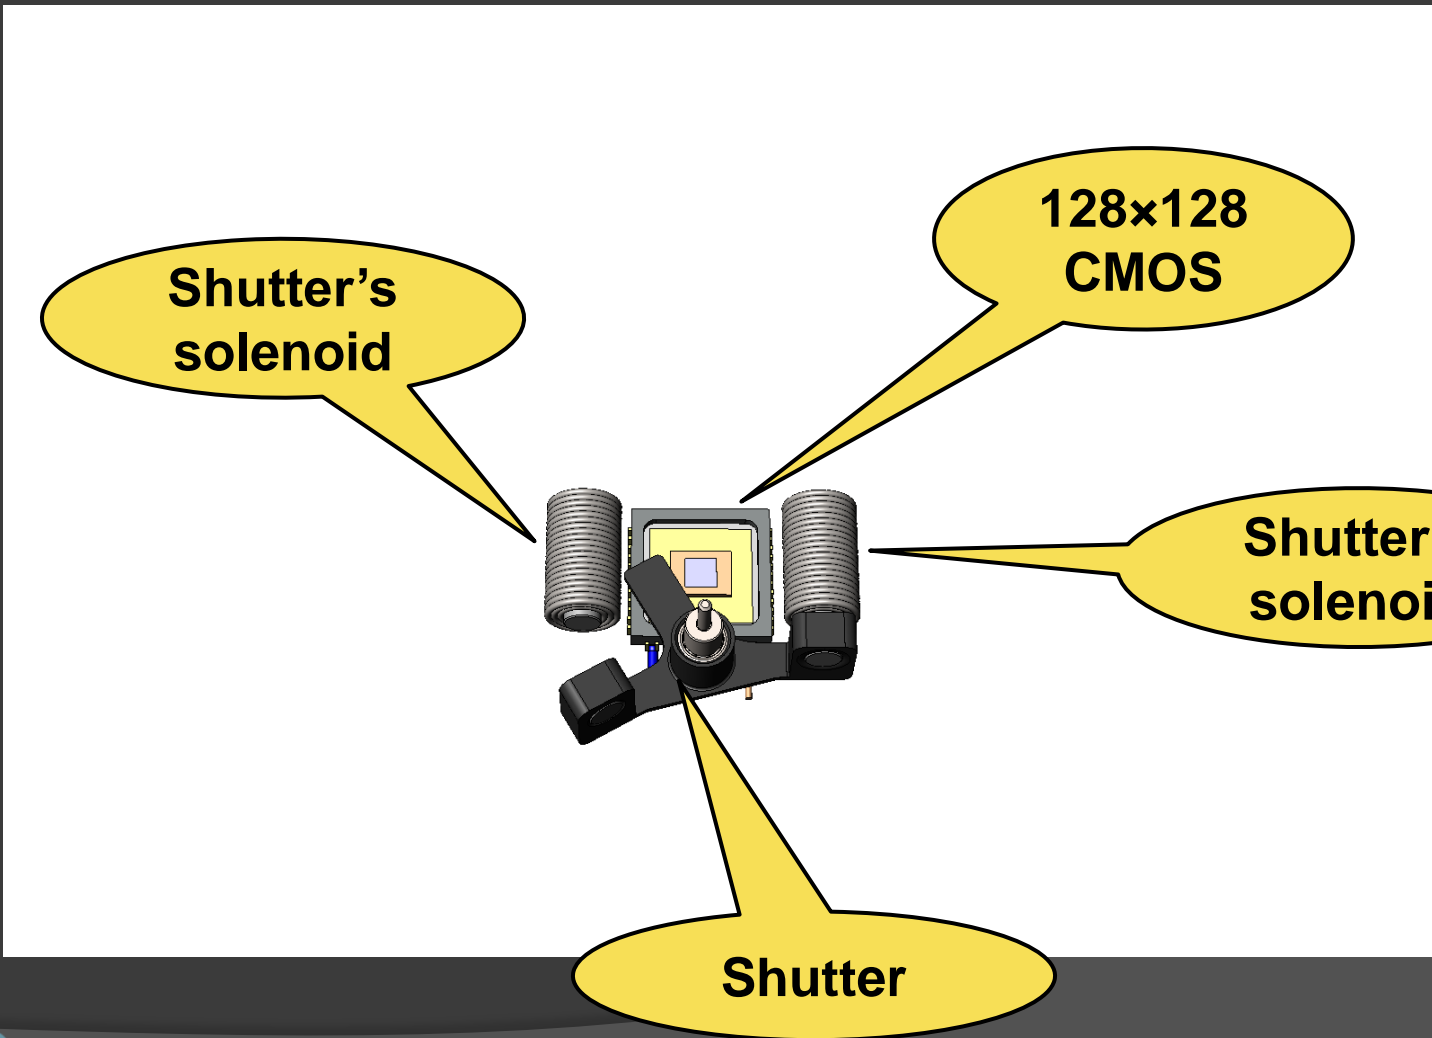


AZMERIT



ASTC-1 Assembling

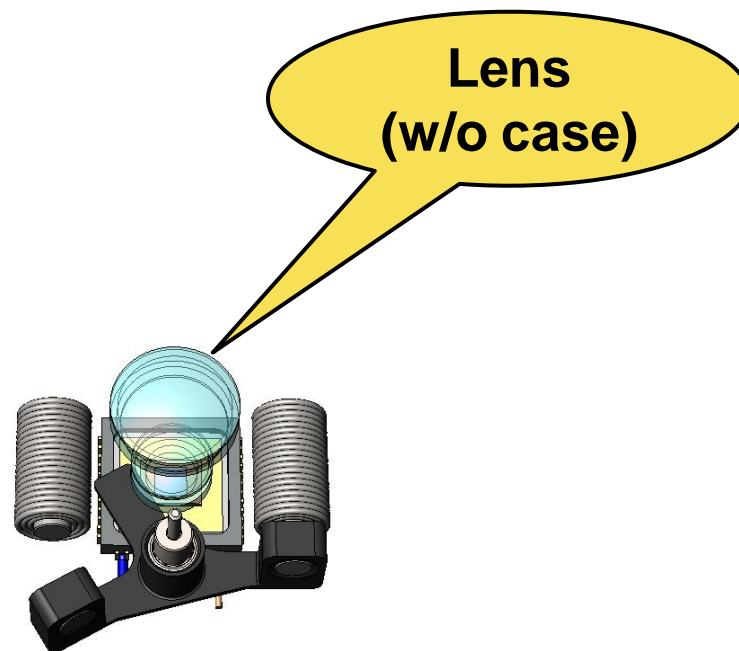


ASTC-1 Assembling

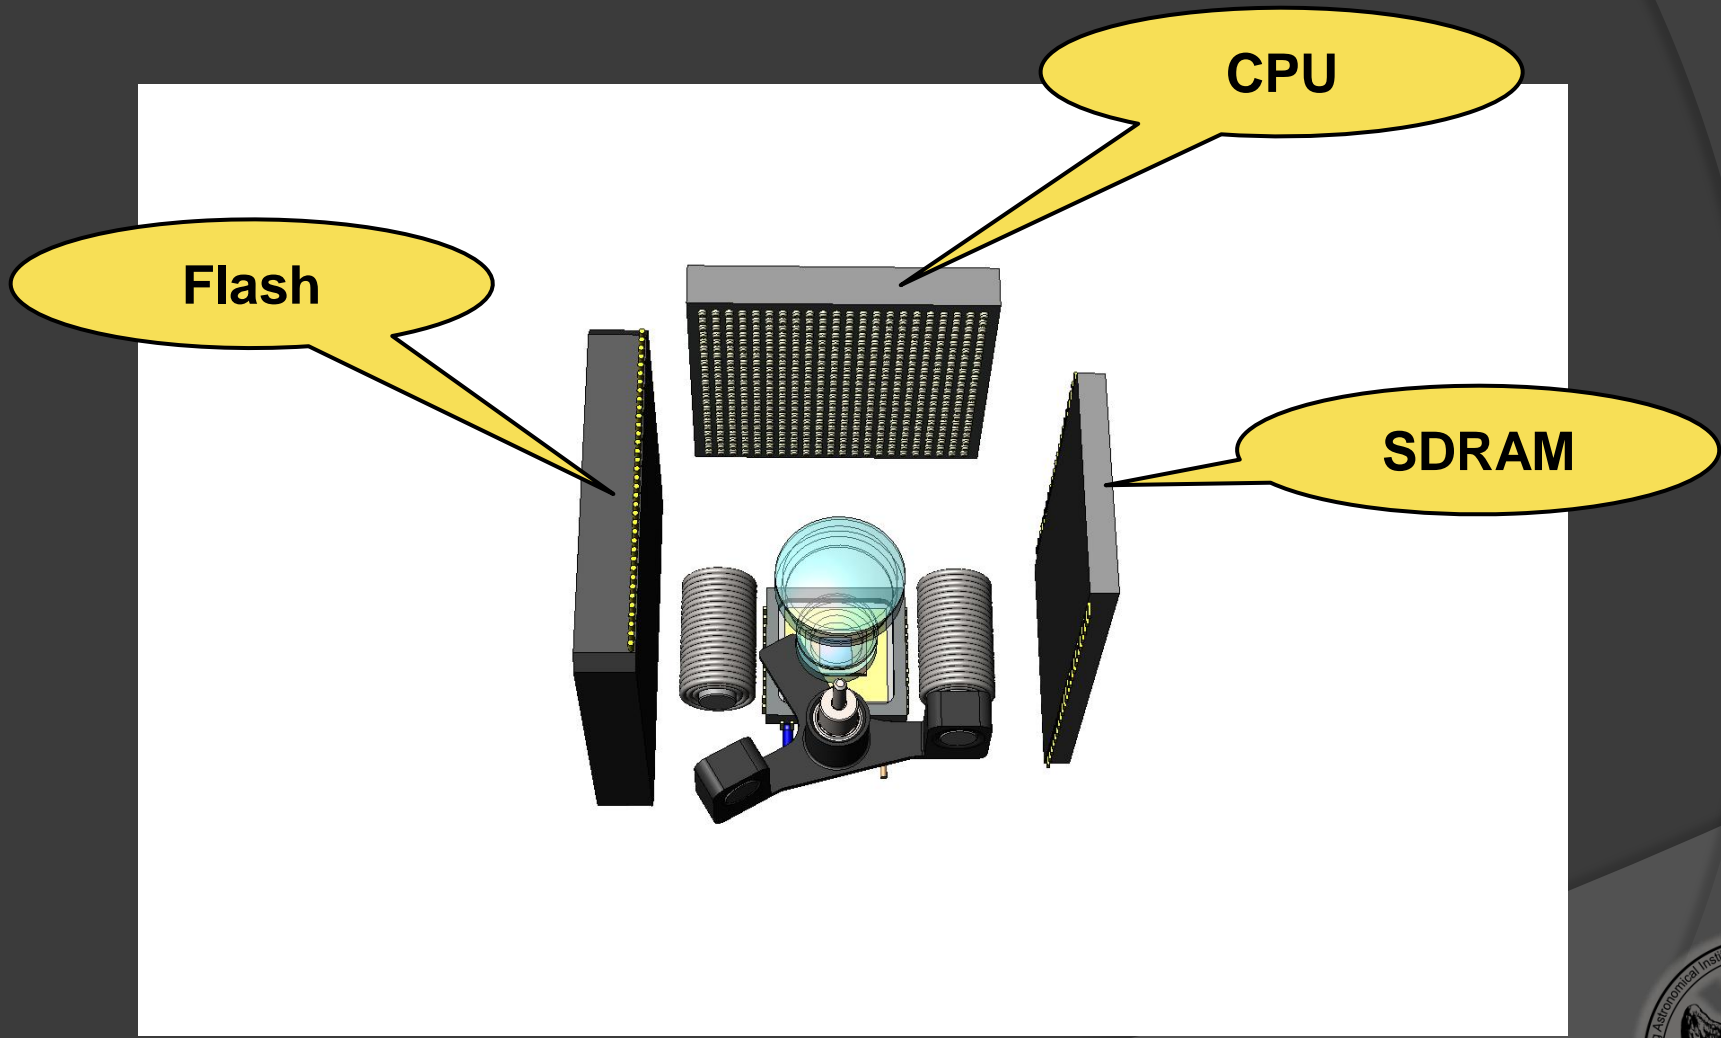


AZMERIT



ASTC-1 Assembling

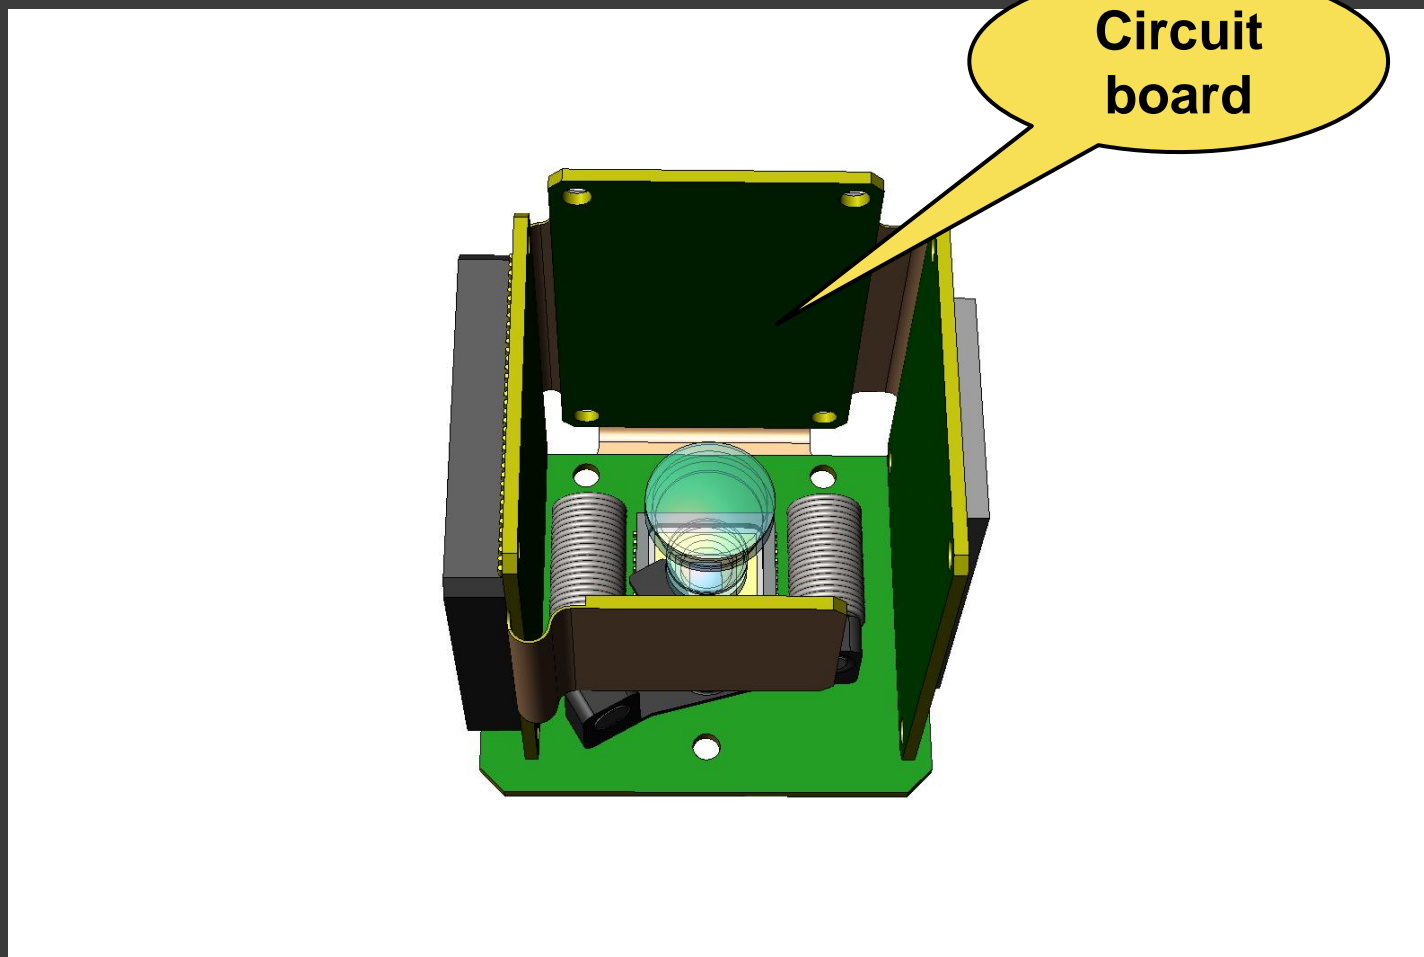


ASTC-1 Assembling

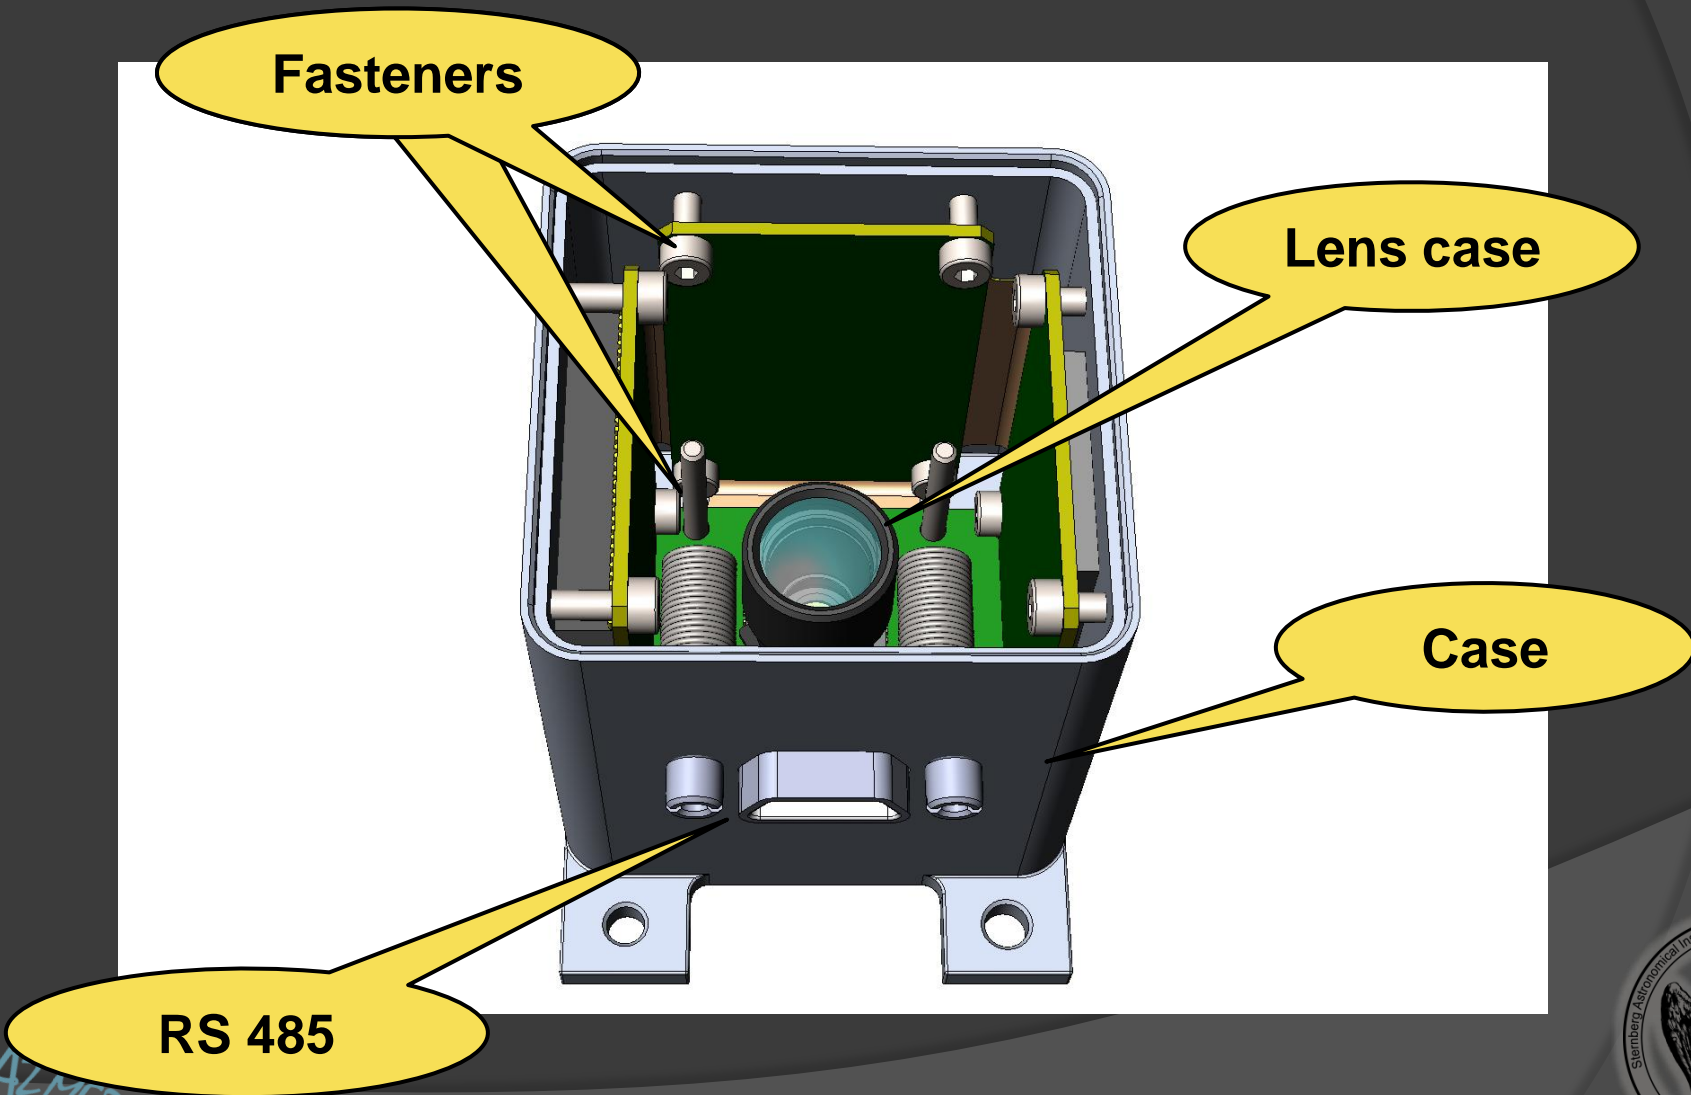

ALMERIT

ASTC-1 Assembling

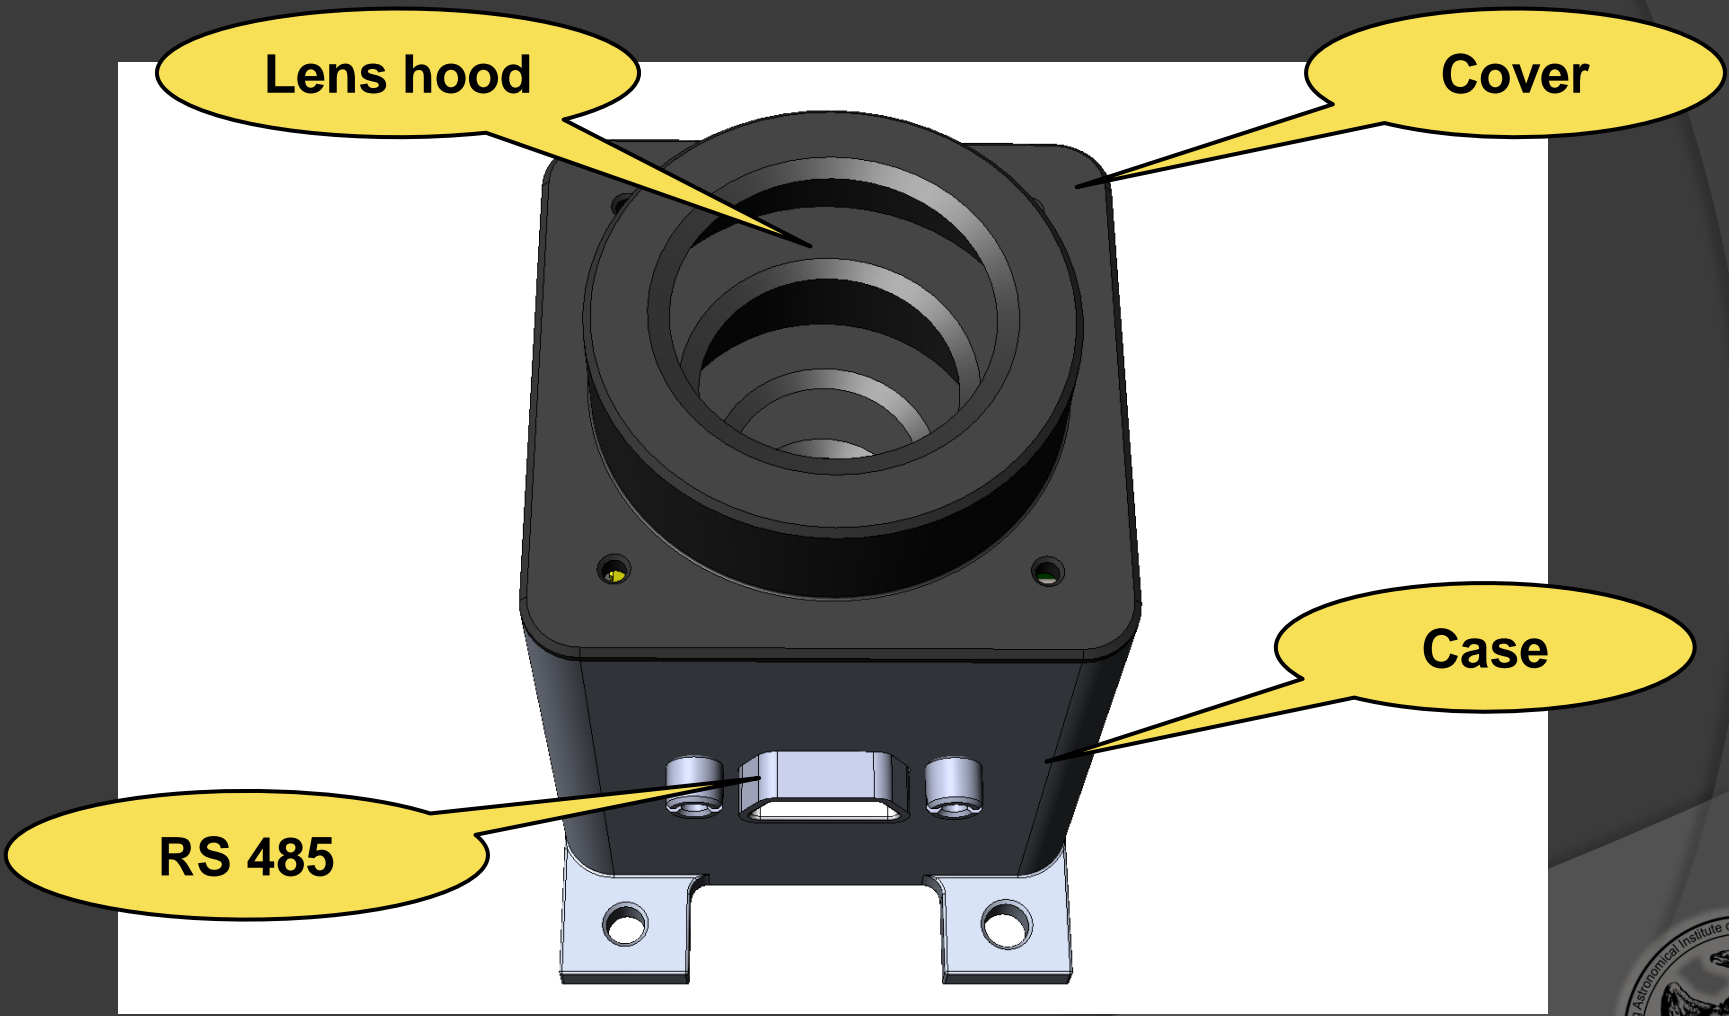


AZMERIT



High Attitude Accuracy

1. “Defocused” Stellar Images
2. Multiple Stars in Field of View
3. Systematical Errors Correction

“Defocused” Stellar Images

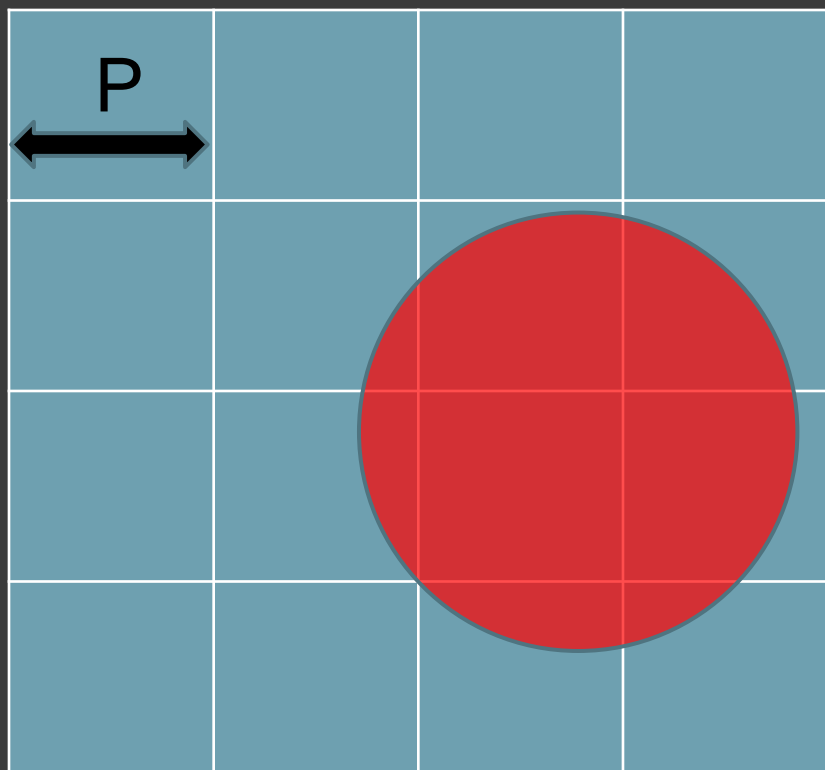

$$\Delta_{x,y} = \frac{P}{SNR}$$

Systematical Errors Correction


List of taking into account systematical errors:

1. Individual Pixel Sensitivity
2. Individual Pixel Dark Currents
3. CMOS Parameters Thermal Dependencies
4. Lens Aberrations (Chromatic and Achromatic)


Most Important Errors are # 2 and # 4.



Individual Pixel Dark Currents

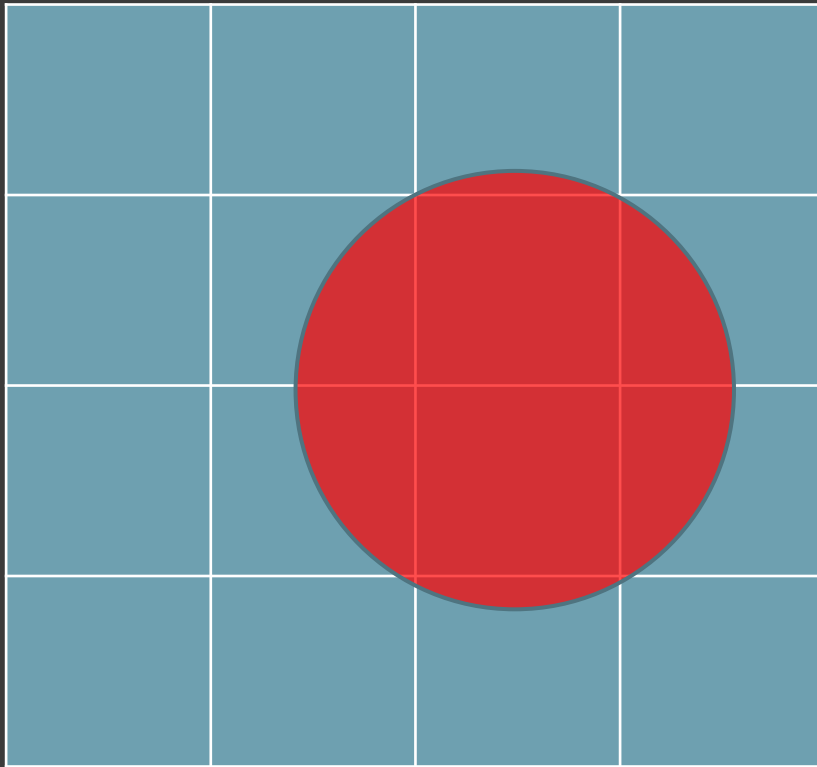

Ideal CMOS

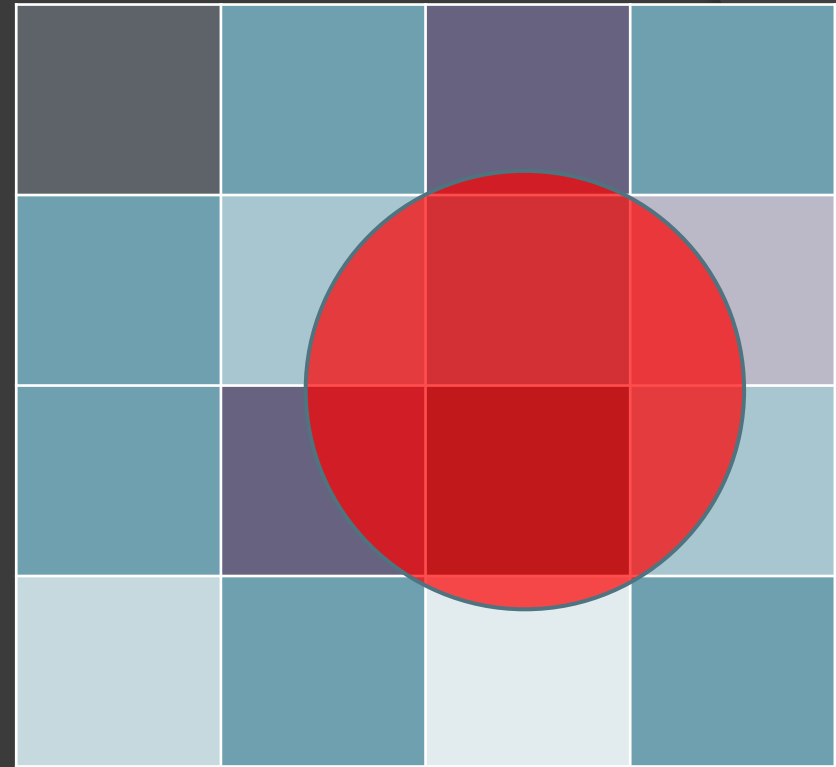

Real CMOS

More detailed see Tuchin et al. (SSC13-I-10)


AZMERIT



On-Orbit Calibration

Why is it necessary?

Dark Current Changes with Total Irradiation Dose

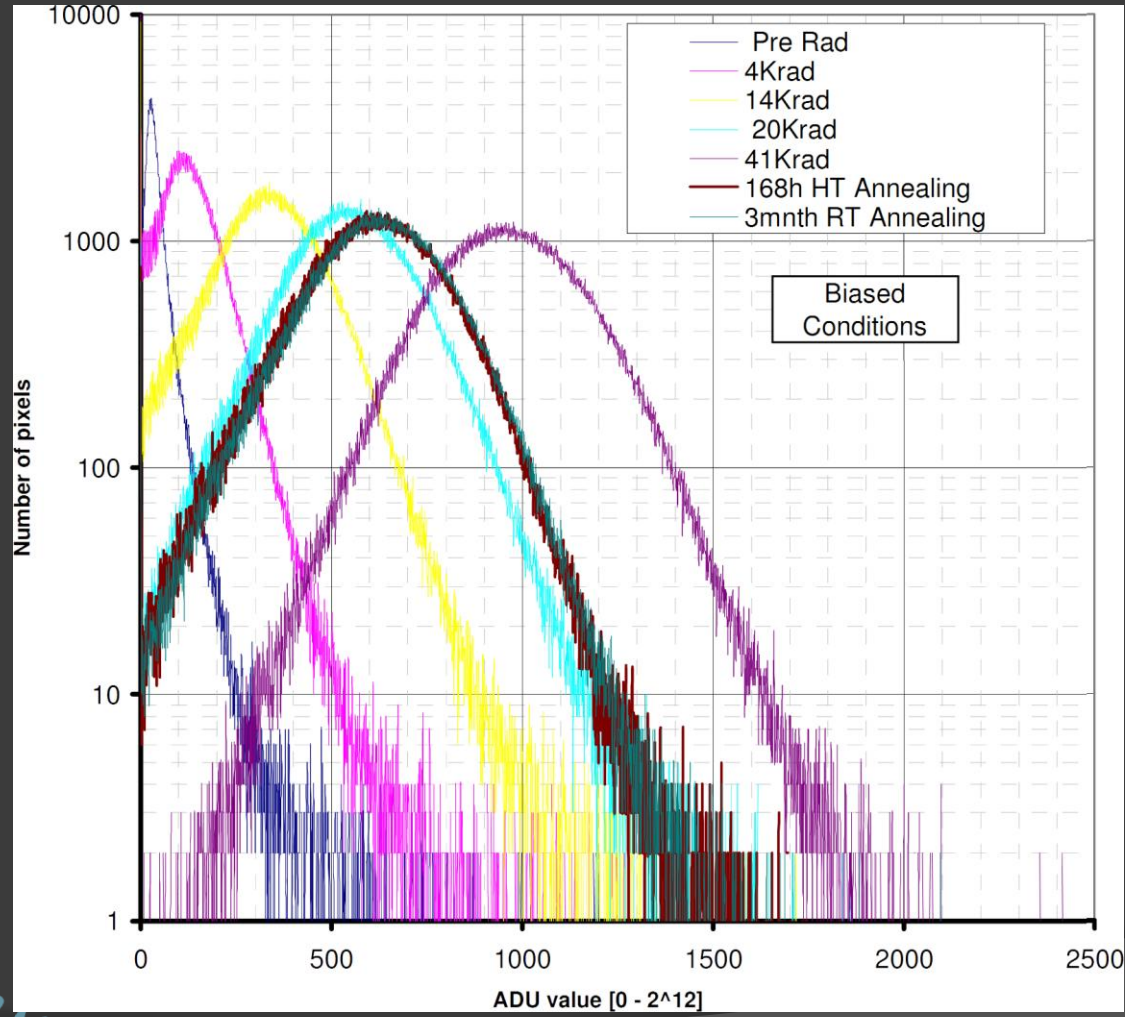

High Accuracy Star Tracker (HAS)
Version 2 CMOS Active Pixel image Sensor (CMOS APS)

Dark Current increases by 100 times in 1/2 year in radiation belt





On-Orbit Calibration

1. Dark currents map changes drastically under the effect of radiation belt.
2. This map should be updated for attitude accuracy maintaining during long missions.
3. Map building is impossible while the lens is open because of those stars which are fainter than the observation threshold. The shutter is designed for carrying out the calibration.



Conclusions

We hope to produce the first example of ASTC-1 by the end of 2014

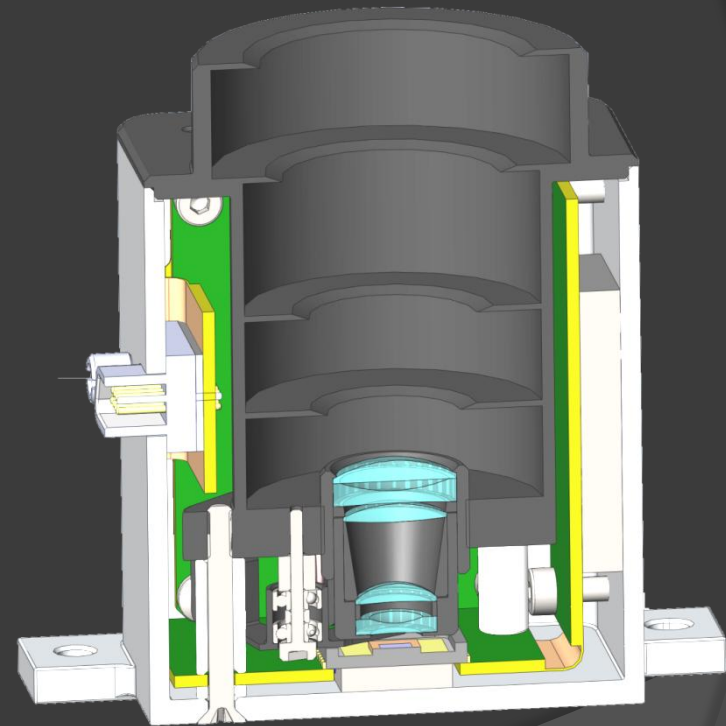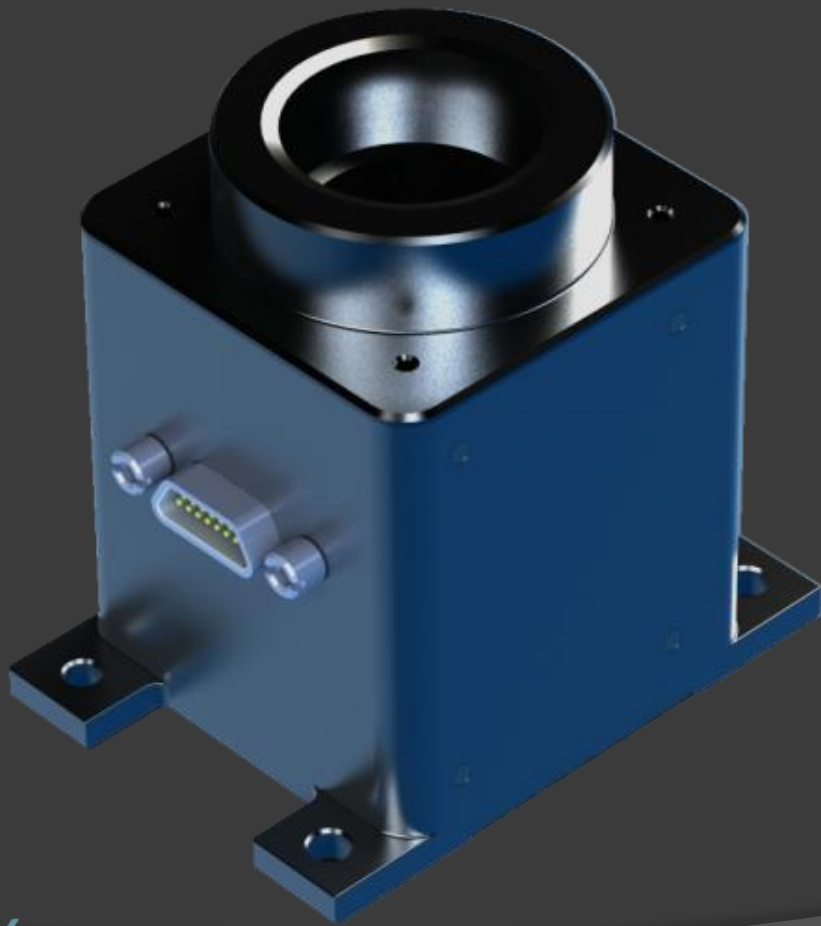

AZMERIT

