
New Small Satellite Capabilities for Microwave Atmospheric Remote Sensing: The Earth Observing Nanosatellite- Microwave (EON-MW)

W. Blackwell, *MIT Lincoln Laboratory*

J. Pereira, *NOAA NESDIS*

August 8, 2015



This work is sponsored by the National Oceanic and Atmospheric Administration under Air Force Contract FA8721-05-C-0002. Opinions, interpretations, conclusions, and recommendations are those of the authors and are not necessarily endorsed by the United States Government.



Outline

- **Introduction and Motivation**
- **Foundational Work: MicroMAS-1, MicroMAS-2, and MiRaTA**
- **The Next Step: EON-MW**
- **Summary**


MicroMAS = Microsized Microwave Atmospheric Satellite

MiRaTA = Microwave Radiometer Technology Acceleration

EON-MW = Earth Observing Nanosatellite-MicroWave




Global Observing System (GOS) For Environmental Monitoring

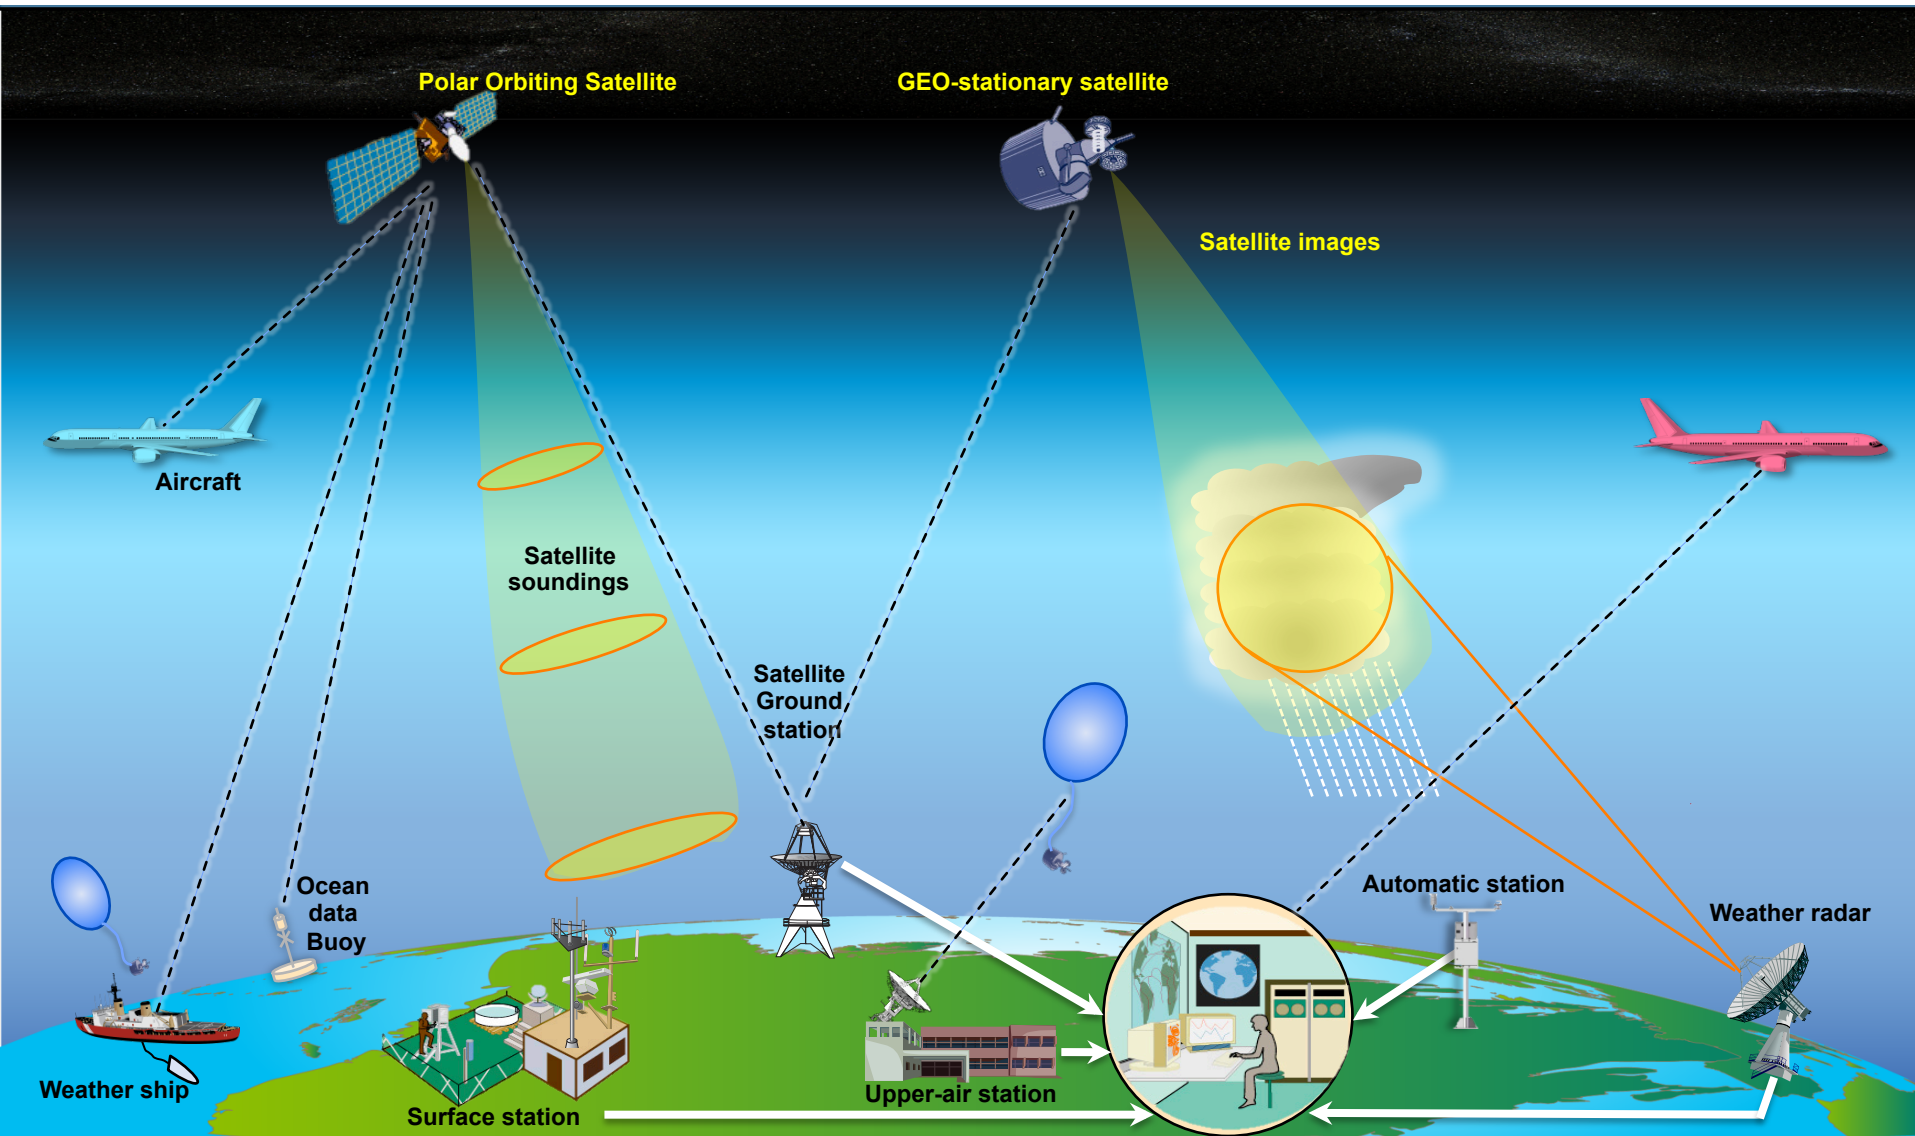



Satellites Provide the Most Forecast Skill


Impact of GOS components on 24-h ECMWF Global Forecast skill
(courtesy of Erik Andersson, ECMWF)

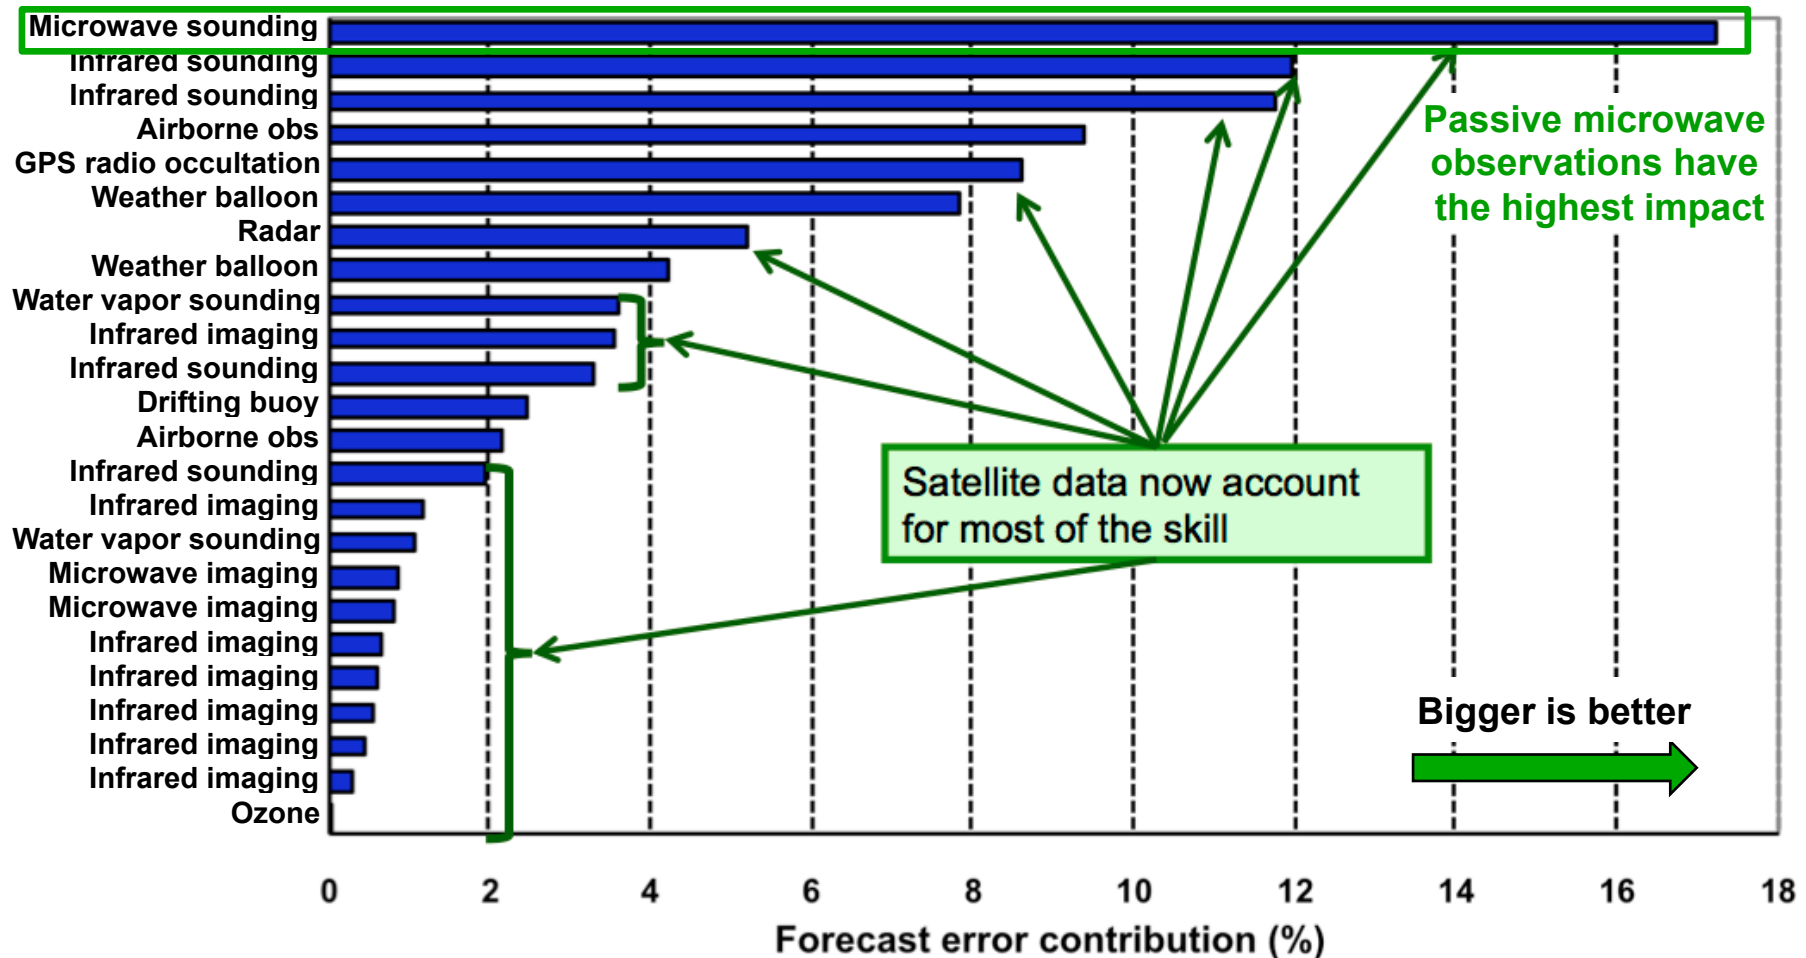



Need: All-Weather, High-Resolution, Persistent 3-D Observations of the Earth's Atmosphere

**Advanced Technology Microwave Sounder
Mosaic of Orbits on Nov 10, 2011**

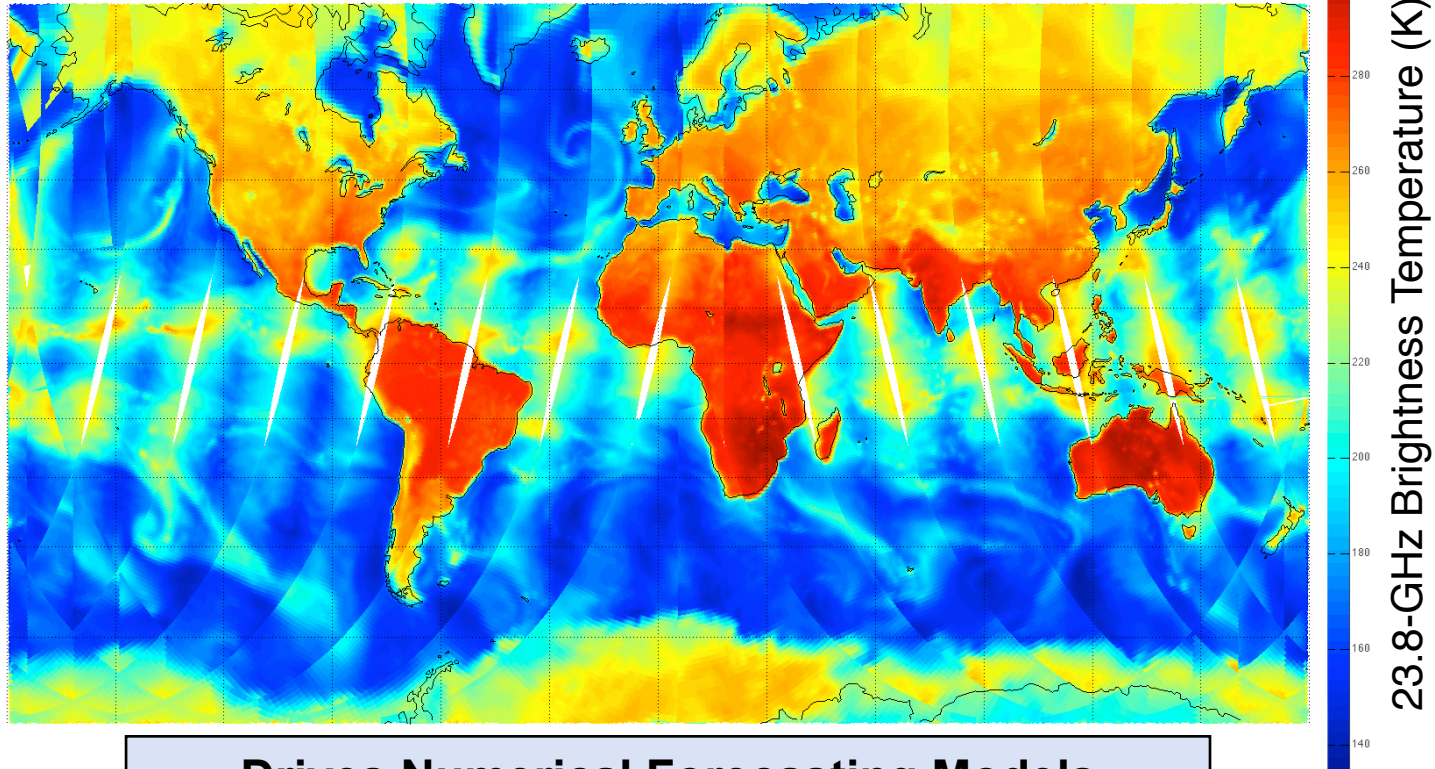

**Drives Numerical Forecasting Models
Monitoring of Severe Weather and Hurricanes
Hydrologic and Climate Studies**



Traditional Approach: Big Satellites

**Suomi NPP Satellite
(Launched Oct 2011)**

Visible/Infrared Imager
Radiometer Suite
(VIIRS)

Cross-track Infrared
Sounder
(CrIS)

Cloud and Earth Radiant
Energy System
(CERES)

Advanced Technology
Microwave Sounder
(ATMS)

Ozone Mapping and
Profiler Suite
(OMPS)



2100 kg

NASA/GSFC

NPP: National Polar-orbiting Partnership

Current Approaches Unsustainable

- Expensive
- Long development cycles
- Very high failure impact

*Independent
Assessment*



*Independent
Assessment*



*Independent
Assessment*






Focus: Microwave Sounding

**Suomi NPP Satellite
(Launched Oct 2011)**

**Advanced Technology
Microwave Sounder
(ATMS)**



100 kg, 100 W

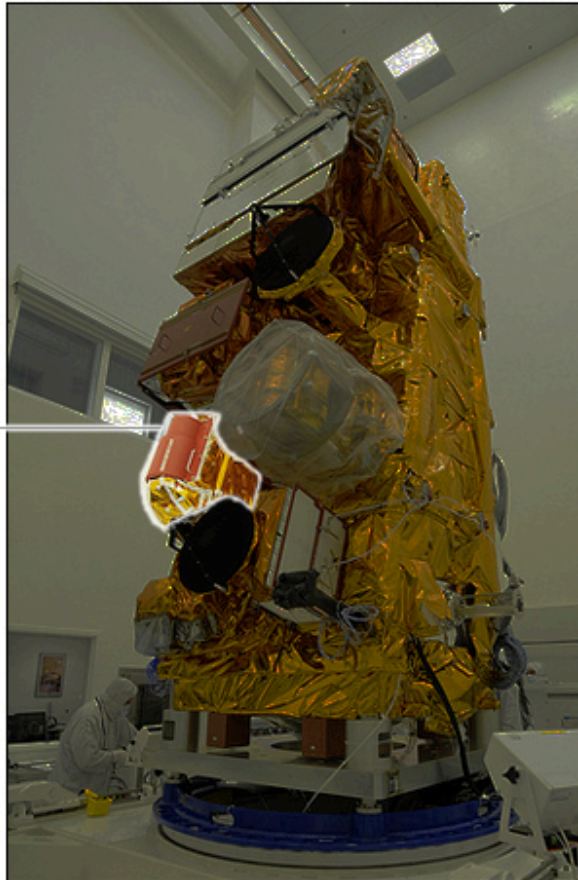


2100 kg

NASA/GSFC

NPP: National Polar-orbiting Partnership

23.8-GHz Brightness Temperature (K)

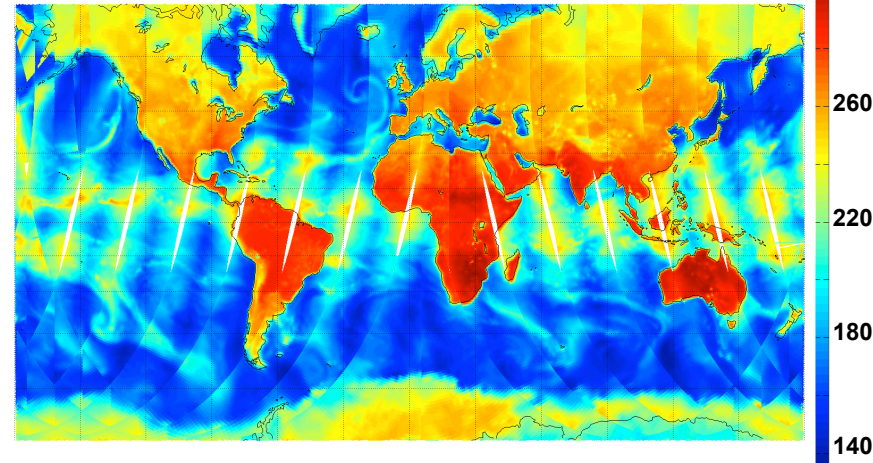


- Microwave sensor amenable to miniaturization (10 cm aperture)
- Broad footprints (~50 km)
- Modest pointing requirements
- Relatively low data rate



New Approach for Microwave Sounding

Suomi NPP Satellite
(Launched Oct 2011)

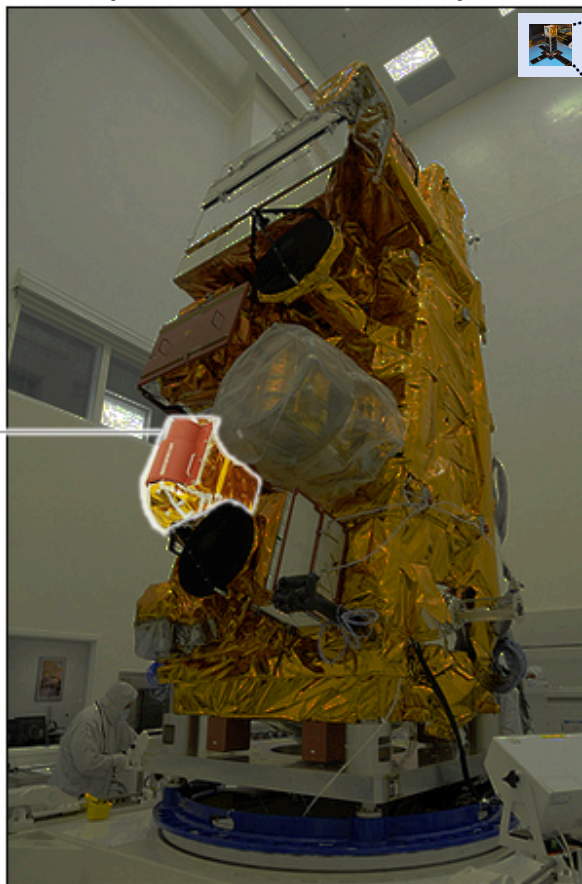

Advanced Technology
Microwave Sounder
(ATMS)




100 kg, 100 W

2100 kg

NASA/GSFC

NPP: National Polar-orbiting Partnership

MicroMAS Satellite
(Launched Jul 2014)

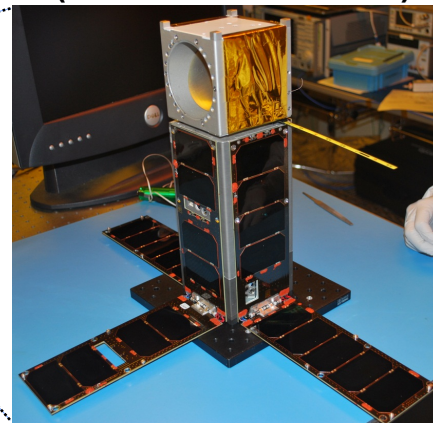

4.2 kg, 10 W, 34 x 10 x 10 cm

- Microwave sensor amenable to miniaturization (10 cm aperture)
- Broad footprints (~50 km)
- Modest pointing requirements
- Relatively low data rate

Perfect fit for a cubesat!



Outline

- Introduction and Motivation
- **Foundational Work: MicroMAS-1, MicroMAS-2, and MiRaTA**
- The Next Step: EON-MW
- Summary

MicroMAS = Microsized Microwave Atmospheric Satellite

MiRaTA = Microwave Radiometer Technology Acceleration

EON-MW = Earth Observing Nanosatellite-MicroWave



MicroMAS-1, MicroMAS-2, and MiRaTA

MicroMAS = Microsized Microwave Atmospheric Satellite


MiRaTA = Microwave Radiometer Technology Acceleration

MicroMAS-1

3U cubesat with 118-GHz radiometer

8 channels for temperature measurements

July 2014 launch, March 2015 release; validation of spacecraft systems; eventual transmitter failure

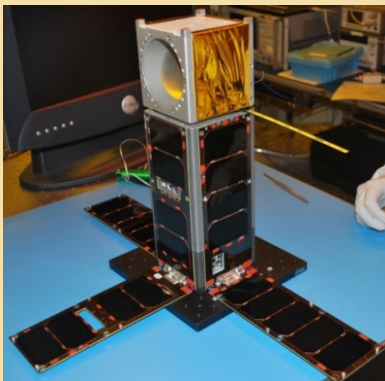


MicroMAS-2

3U cubesat scanning radiometer with channels near 90, 118, 183, and 206 GHz

12 channels for moisture and temperature profiling and precipitation imaging

Two launches in 2016

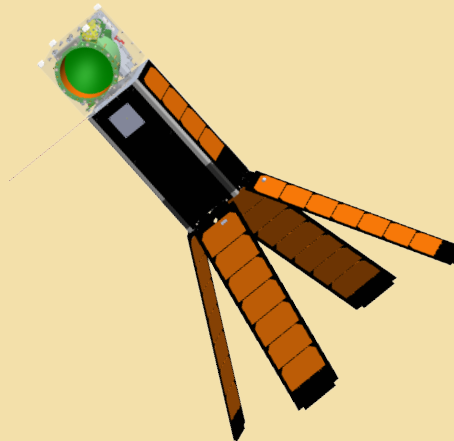


MiRaTA

3U cubesat with 60, 183, and 206 GHz radiometers and GPS radio occultation

10 channels for temperature, moisture, and cloud ice measurements

Nov 2016 launch on JPSS-1

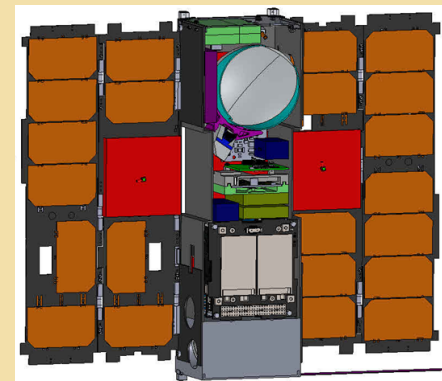




Earth Observing “Nanosatellite” (EON-MW)

MicroMAS-1

3U cubesat with 118-GHz radiometer

8 channels for temperature measurements

July 2014 launch, March 2015 release; validation of spacecraft systems; eventual transmitter failure

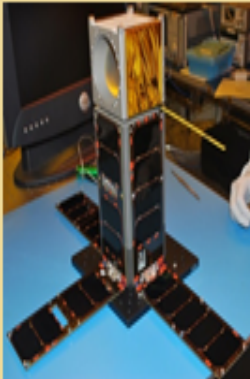

MicroMAS-2

3U cubesat scanning radiometer with channels near 90, 118, 183, and 206 GHz

12 channels for moisture and temperature profiling and precipitation imaging

Two launches in 2016




MiRaTA

3U cubesat with 60, 183, and 206 GHz radiometers and GPS radio occultation

10 channels for temperature, moisture, and cloud ice measurements

Nov 2016 launch




EON-MW

12U satellite with 22 channels to replicate ATMS

High-performance, radiation tolerant design; >two-year mission life

2018/2019 launch

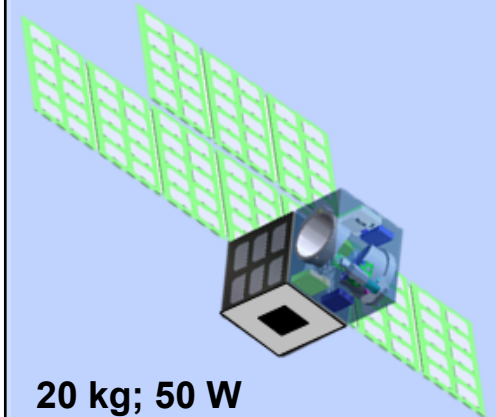

20 kg; 50 W




Successful MicroMAS Release

March 4, 2015



Micro-sized Microwave Atmospheric Satellite (Released from ISS 3/4/2015)

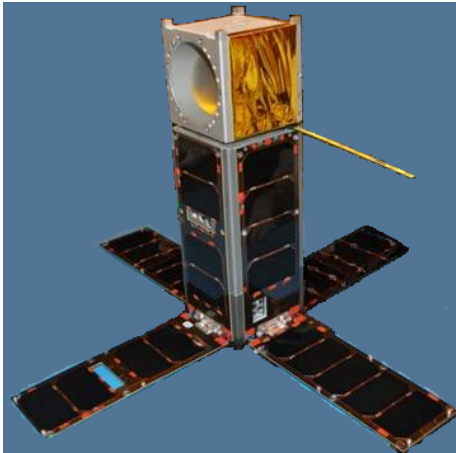

4.2 kg, 10 W, 3U (34 × 10 × 10 cm)

MicroMAS provides high-resolution radiometric imagery for improved weather forecasting

Collaborative mission between MIT LL and MIT Campus (Aero/Astro)

MIT Campus: Spacecraft bus
MIT LL: Payload and system I&T


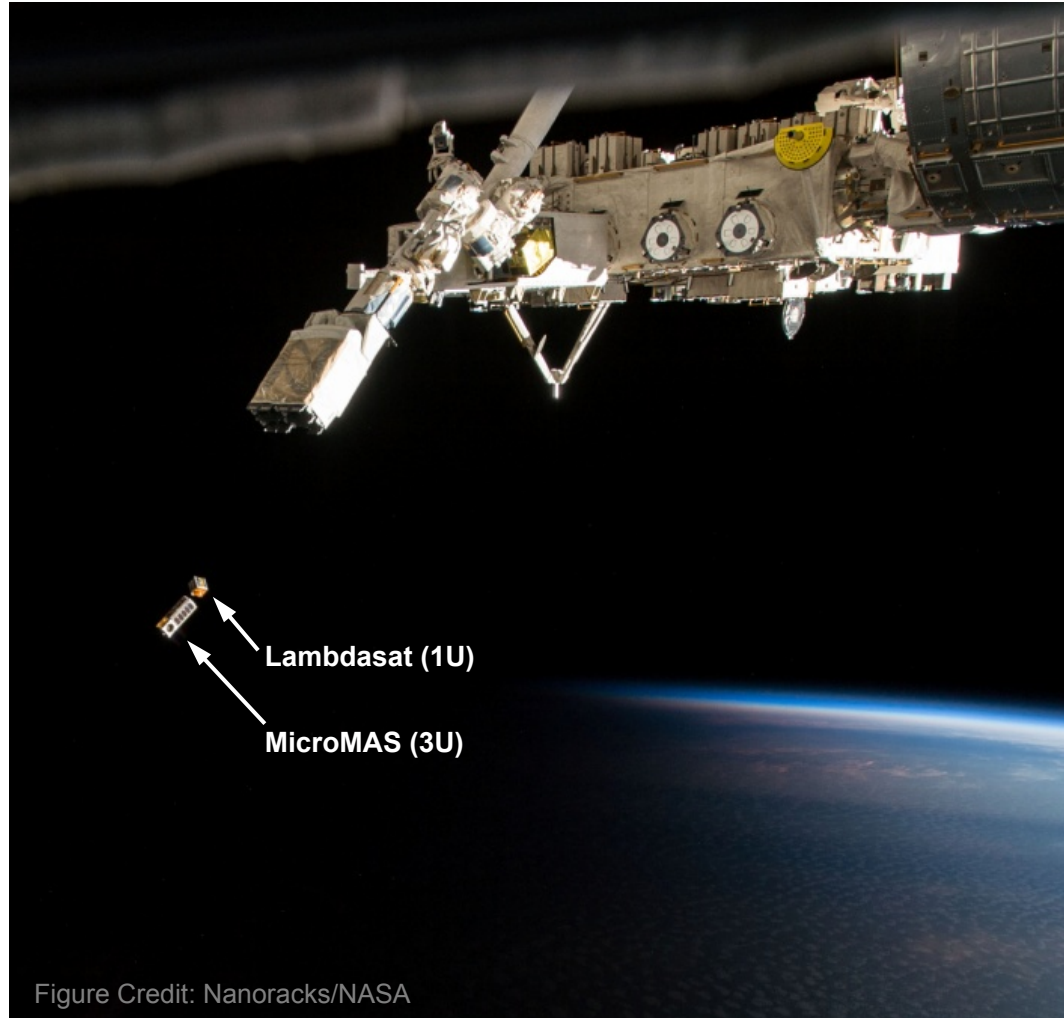


Figure Credit: Nanoracks/NASA



The MicroMAS CubeSat


- 4.25 kg total mass
- 10 W avg power
- 16 kbps max data rate
- 0.5° pointing accuracy

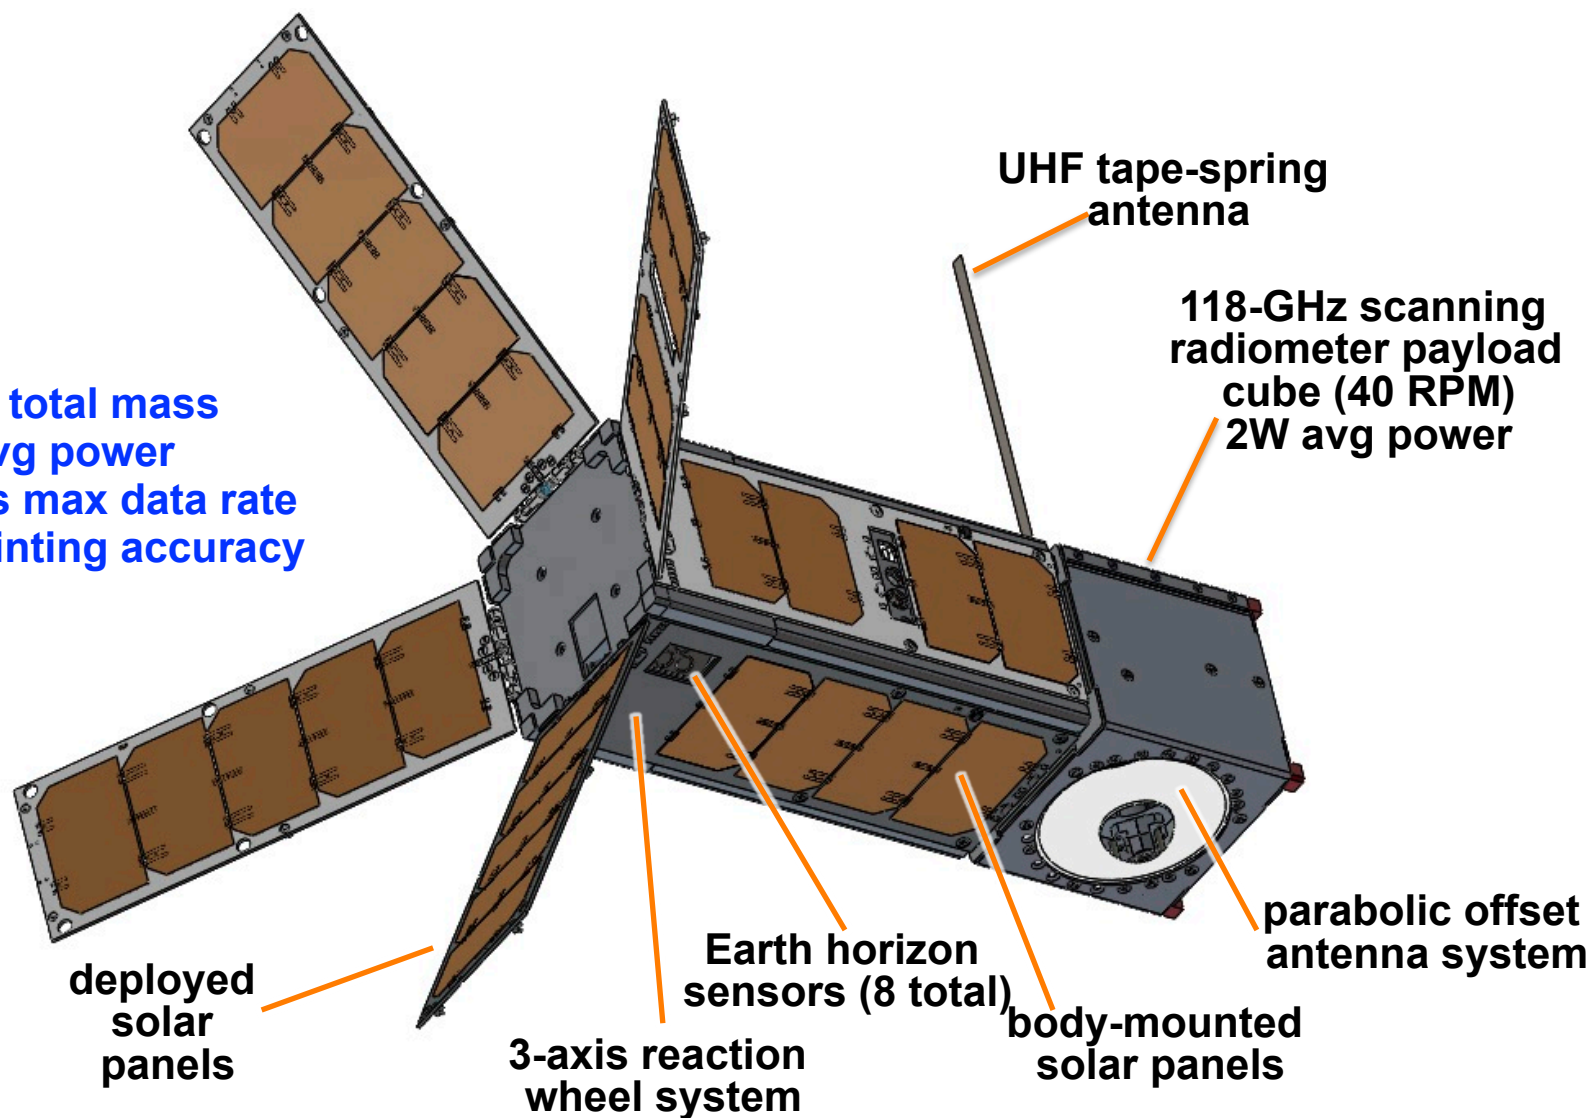



MicroMAS Bus Design


Custom vs. COTS Parts

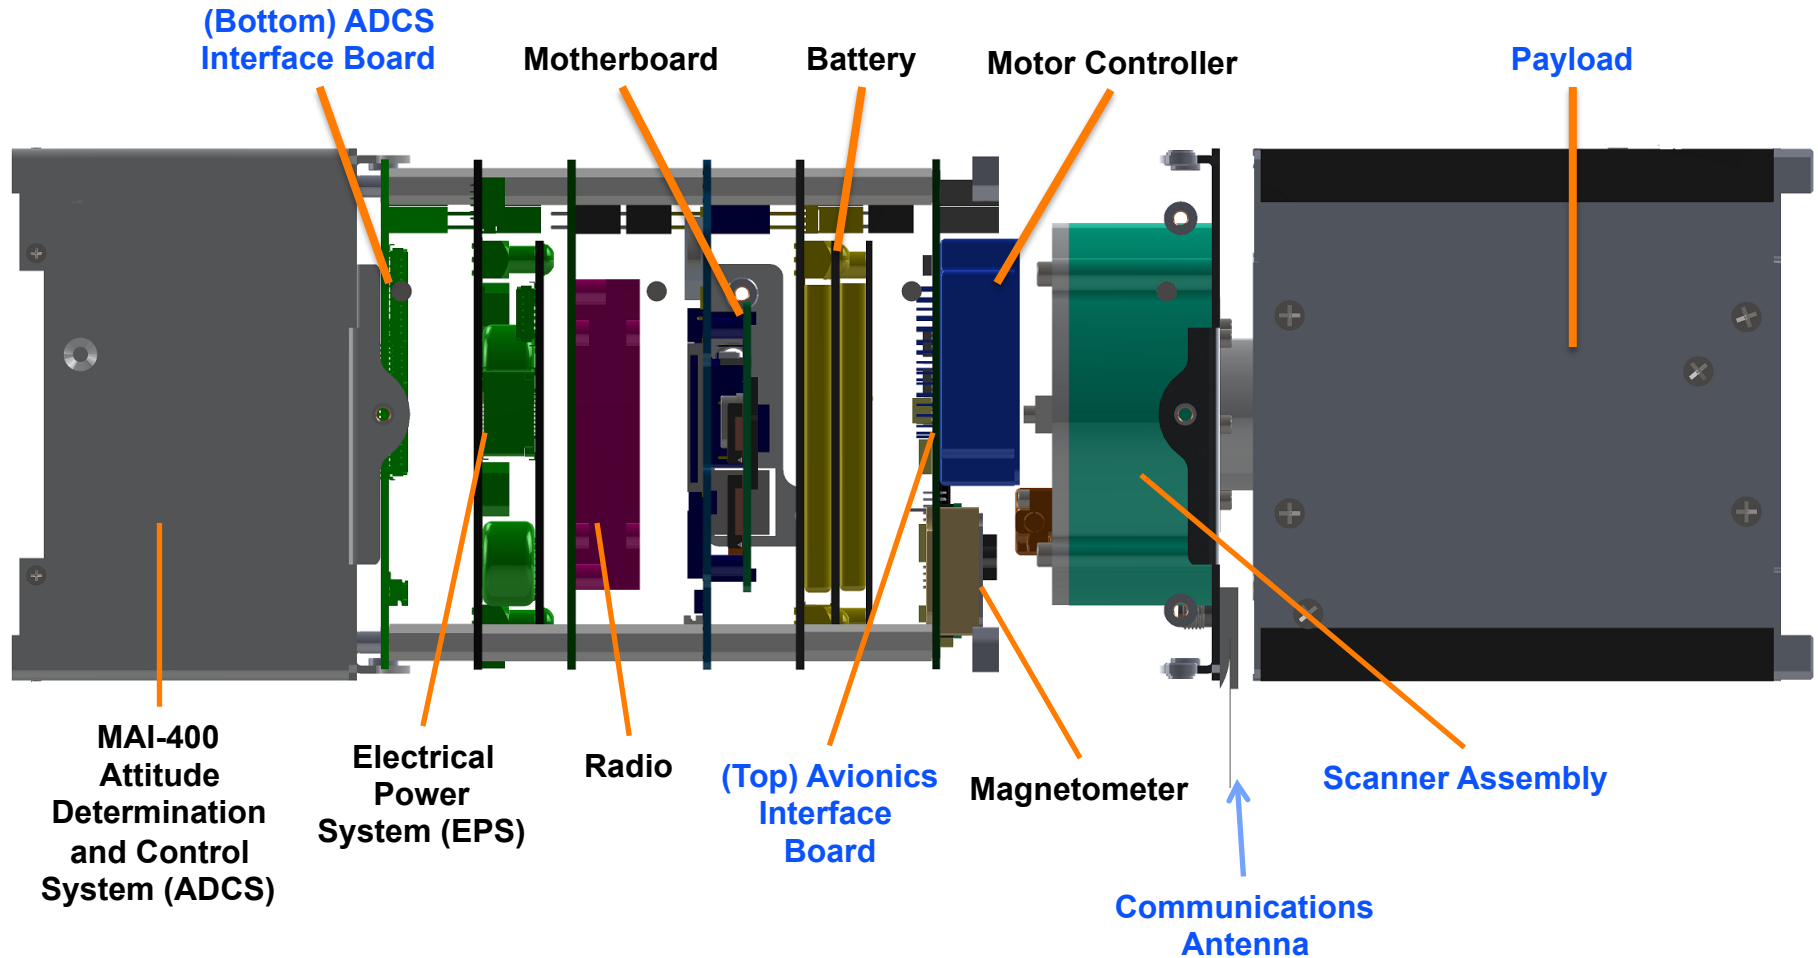

Timely development of COTS parts was a major program challenge



MicroMAS Payload (Side View) 118-GHz Spectrometer

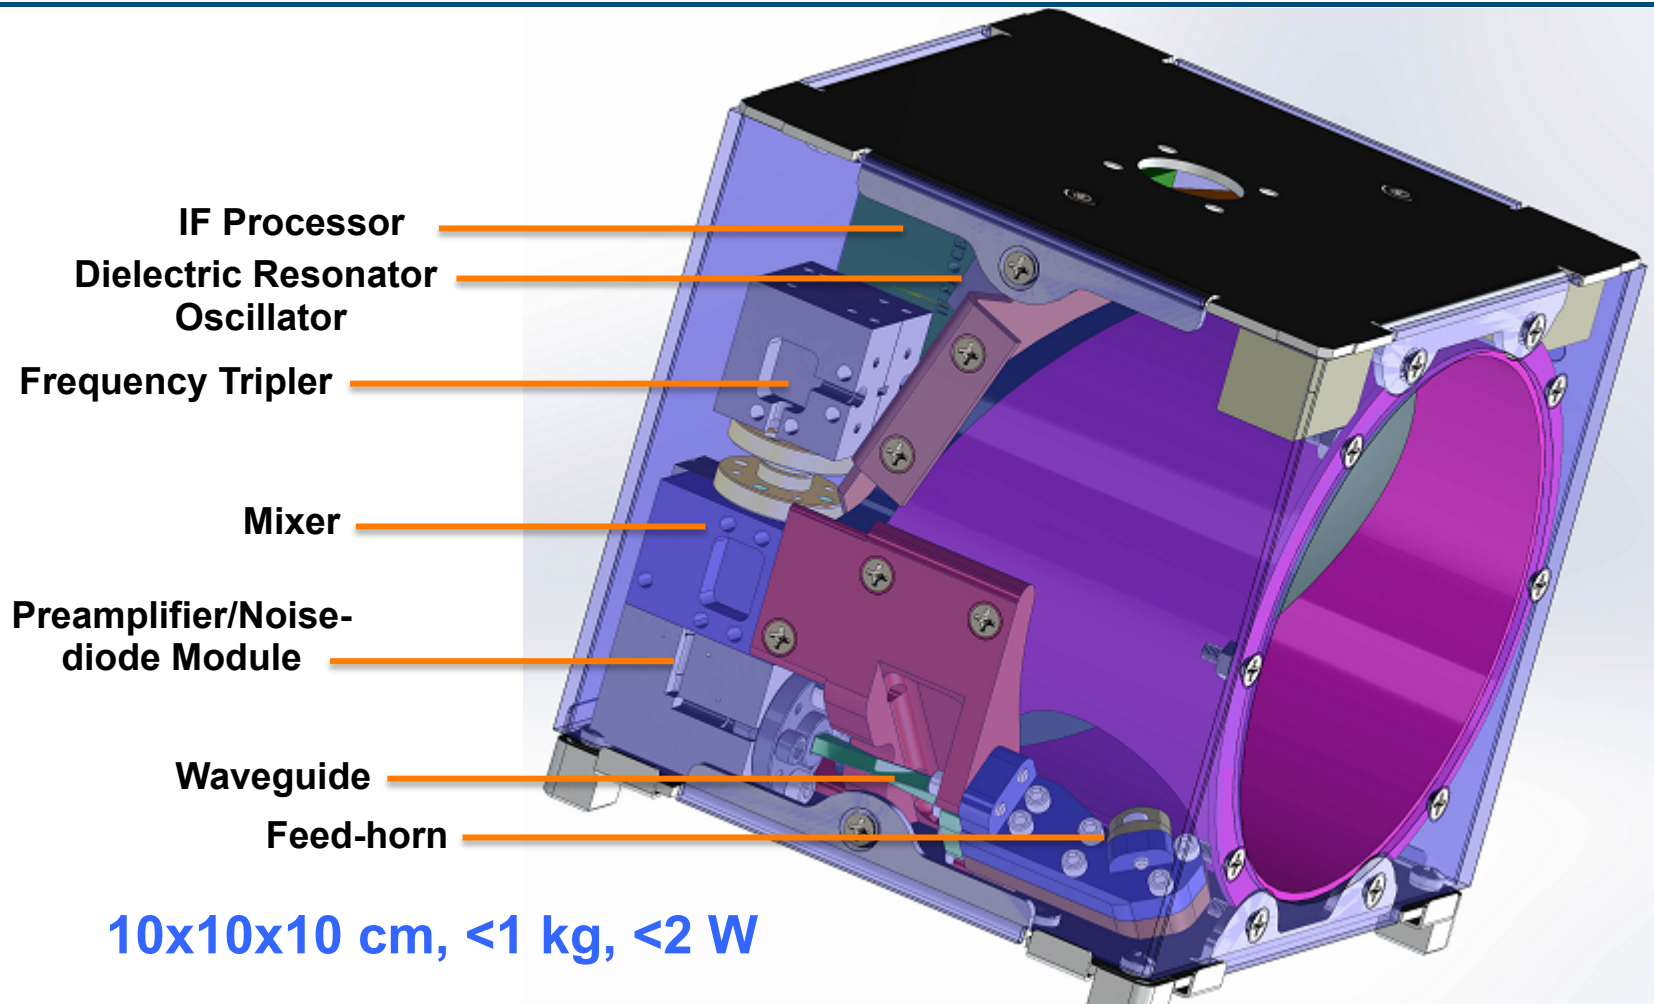


10x10x10 cm, <1 kg, <2 W

Approximately a factor of 100 reduction in size, weight, and power relative to the current state of the art





MicroMAS Flight Unit

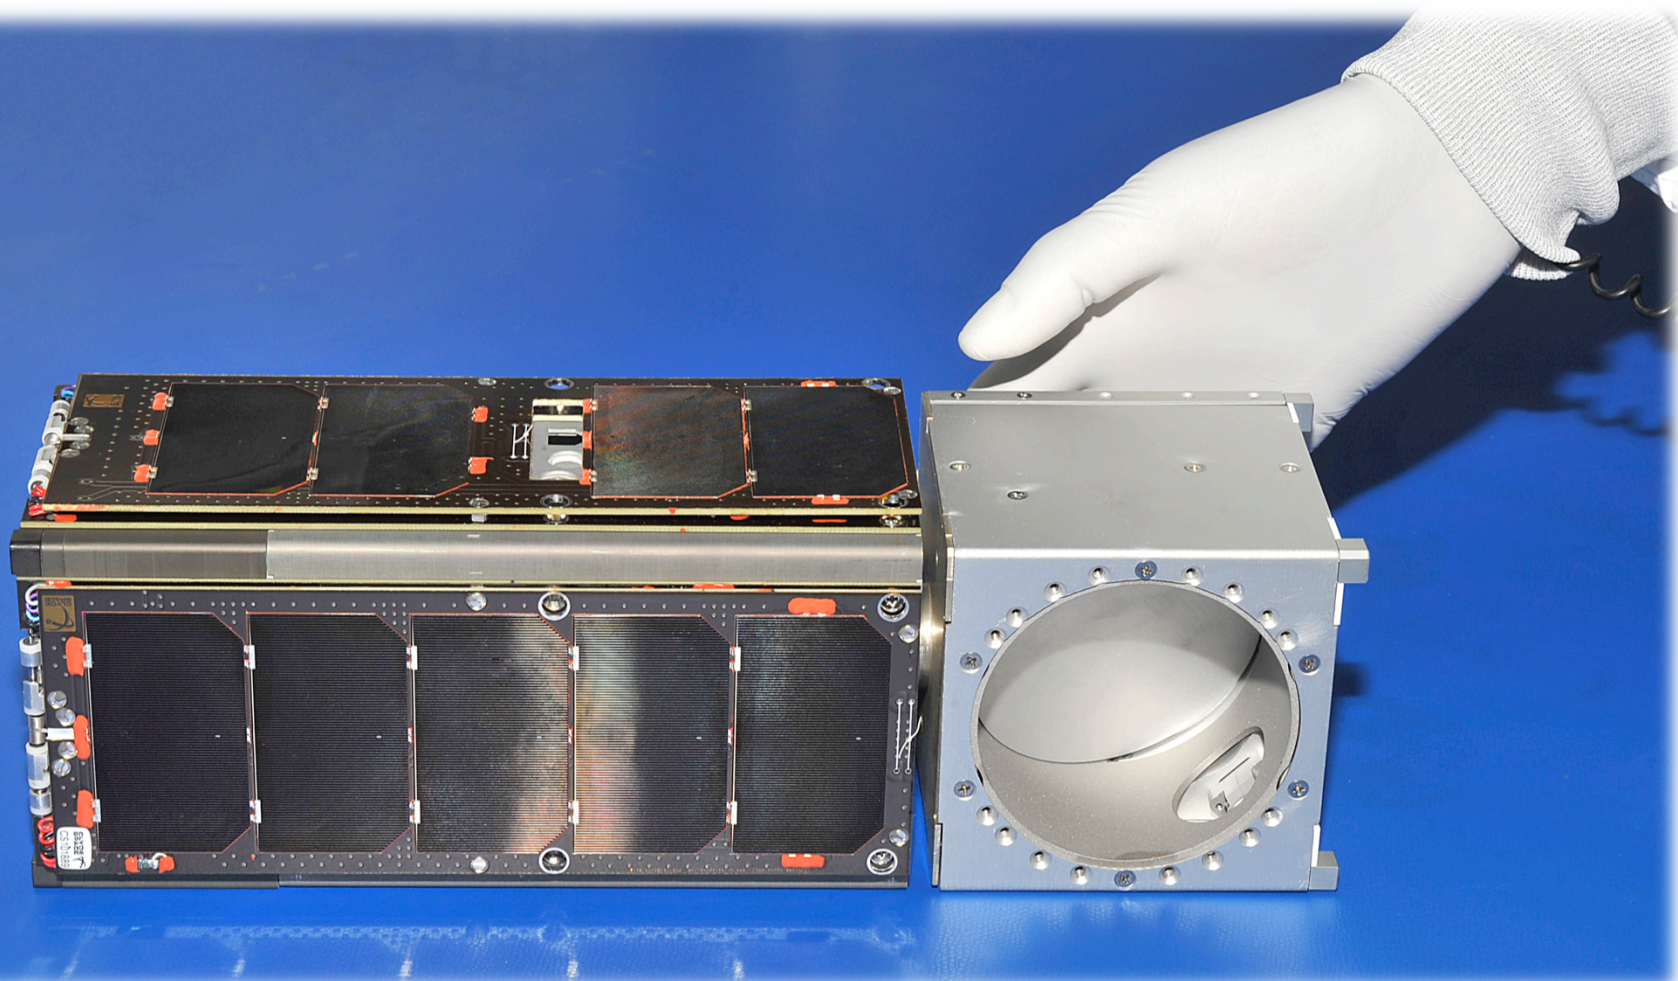



Radiometer Performance (Accuracy and Precision) is State-of-the-ART

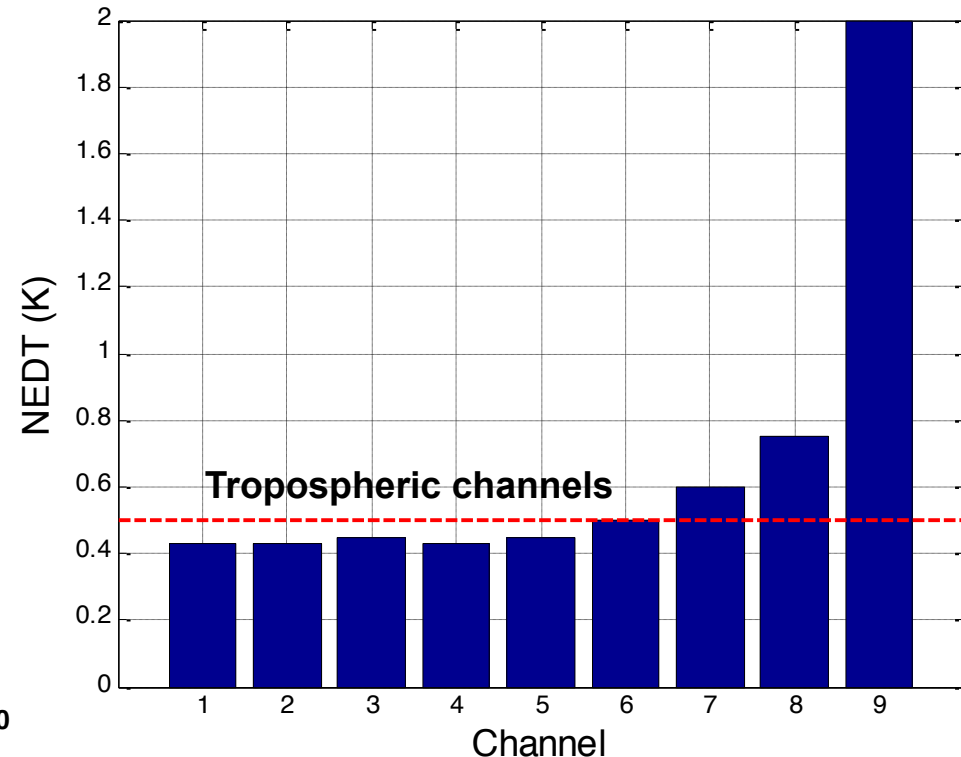
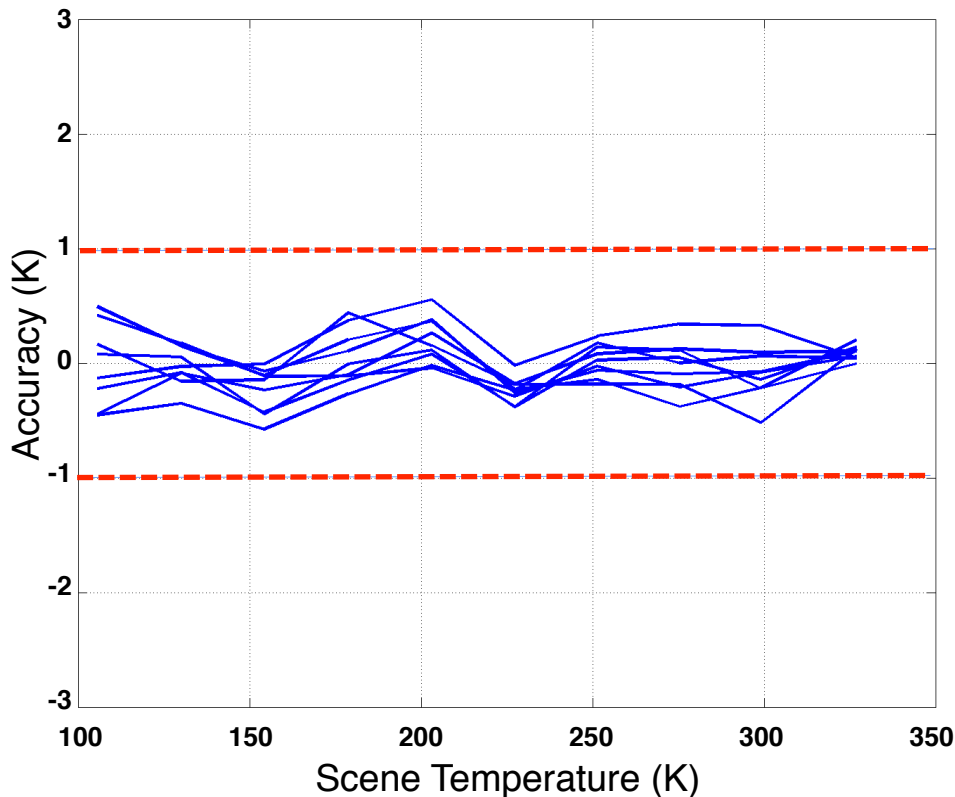




MicroMAS Spacecraft Telemetry




Successful Checkout of Avionics, Power, Attitude Determination, Thermal, and Communications Subsystems

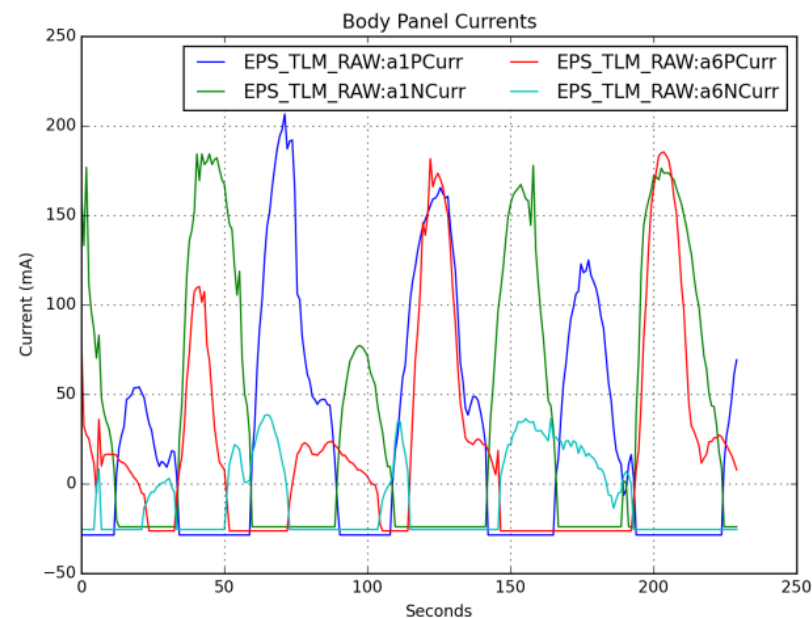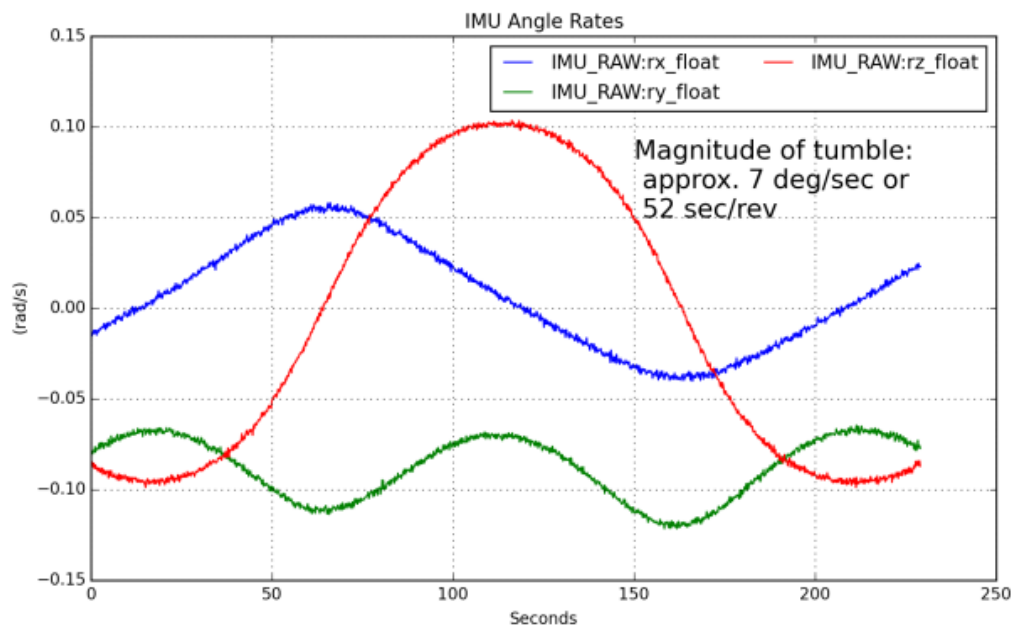




Earth Horizon Sensor Readings

EHS A (Side) Measurements

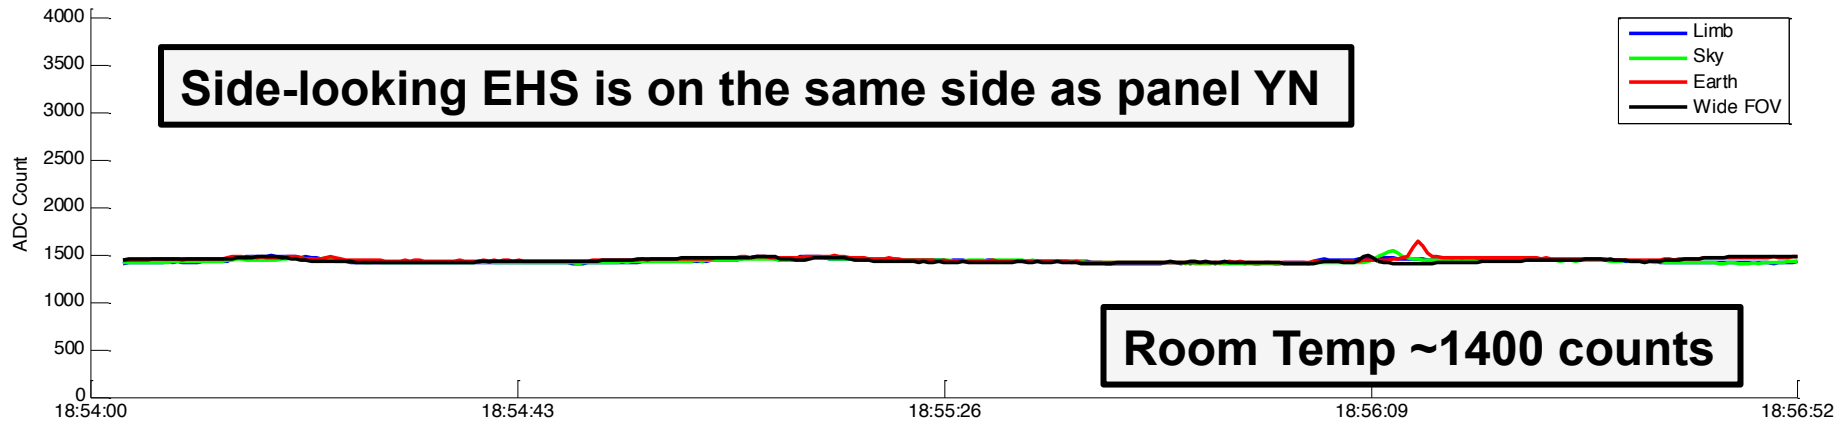


EHS B (AntiRam) Measurements

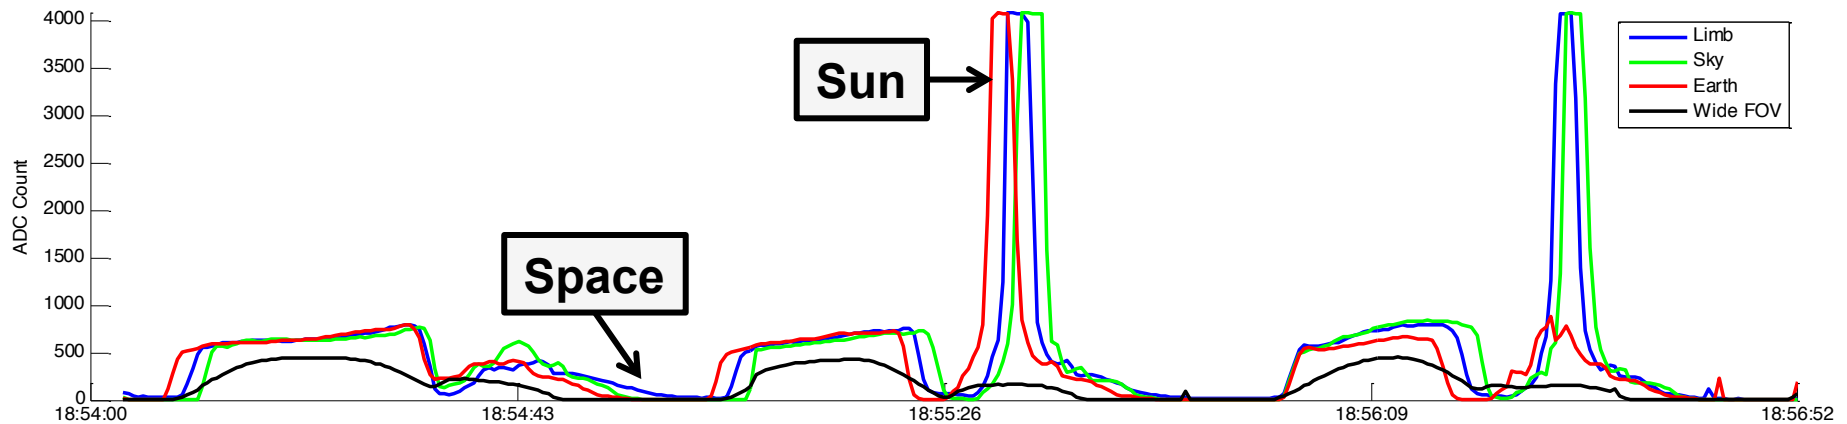



MicroMAS-2

Late 2016 Launch

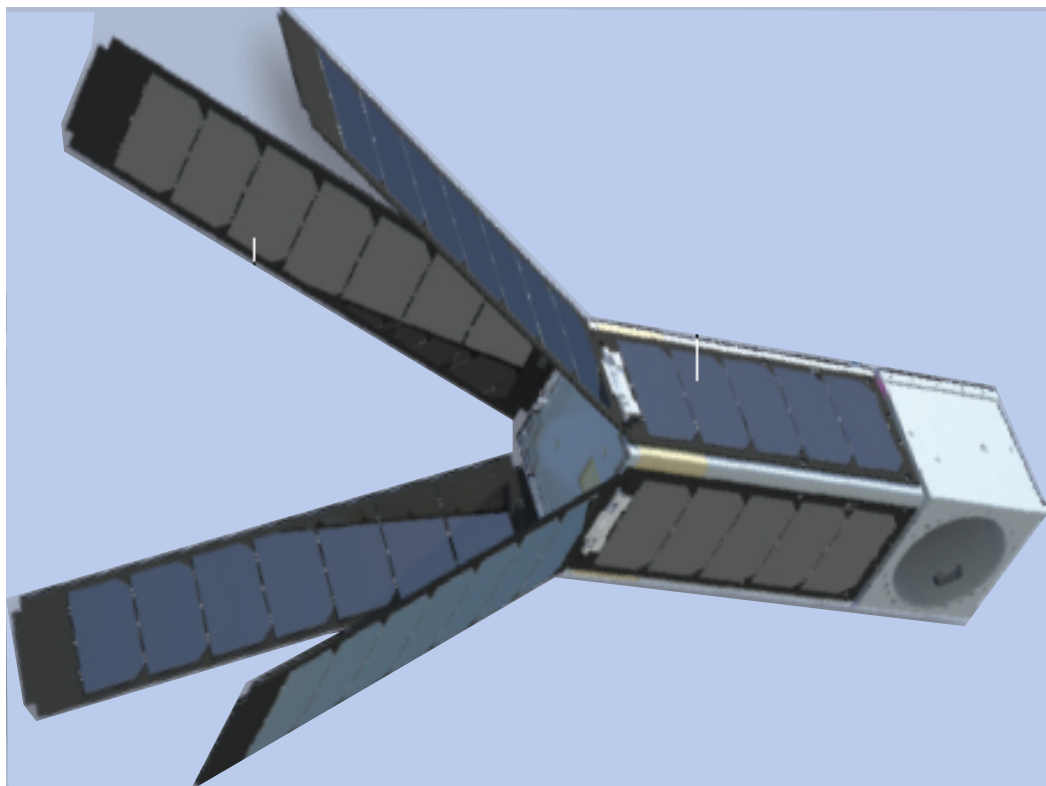

Spacecraft

- 3.8 kg total mass
- 9.1 W avg power
- 16 kbps max data rate
- 0.2° pointing accuracy

Payload

- 12 Channel (90-206 GHz)
- Scanning Radiometer
- Payload Cube (30 RPM)
- <3 W avg power



MicroMAS-2 Design Changes


Subsystem	Delta from MicroMAS1		Impact
Payload	Next gen payload 12 channel, quad-band	Better science	Power, Data +~25%
Avionics	More flexible executive code Bug fixes in ADCS code		Improved performance and stability
Comm	-Next gen Cadet high-rate radio -Backup low-rate radio on motherboard (MB)	Backup for Cadet radio failure - Recover ADCS anomaly - Partial data option - Use as beacon	Improved reliability
Power	4@ 3U panels, Deploy to 135 °	Supplies more power	Better performance
Launch	ISRO PSLV ISIS Quad pack	Schedule availability	Survive higher launch loads
Orbit	~ 500 km, 98° sun synch	Longer orbit life	Operate in different thermal conditions
Ground segment	Beacon Improved ground station code	Better performance and reliability	Beacon freq approval



MicroMAS-2 Payload


Ultracompact W/F/G band Radiometer

- Window 2 ch (90, 207 GHz)
- F band 9 ch (115-119 GHz)
- G band 3 ch (183±1, 3, 7 GHz)

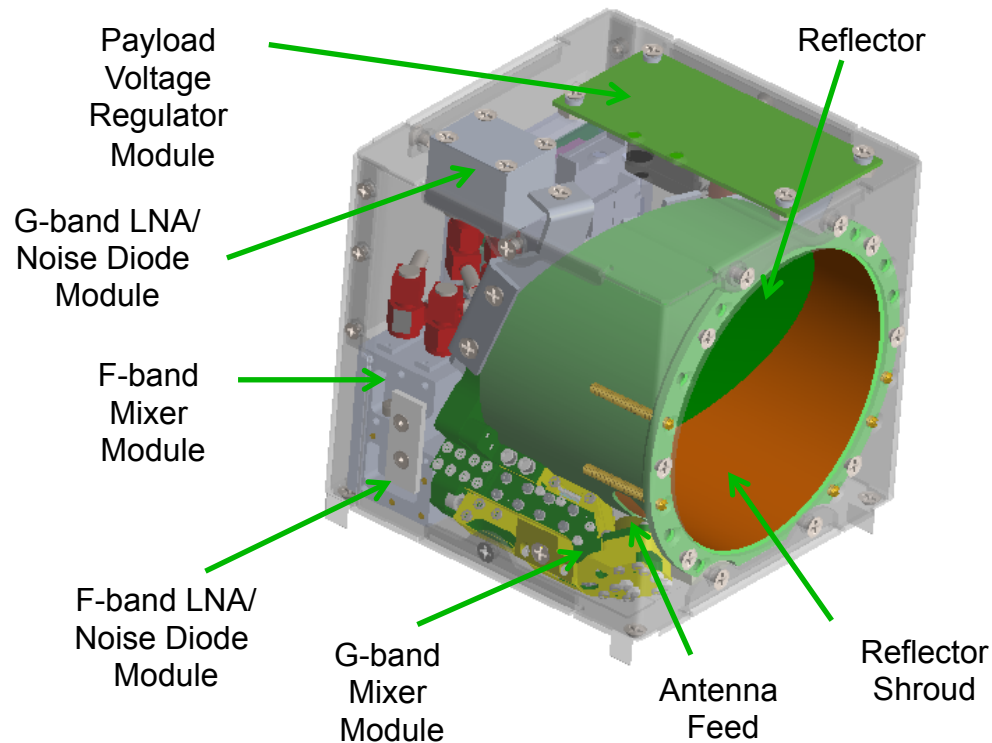



MicroMAS-2 Flight Unit

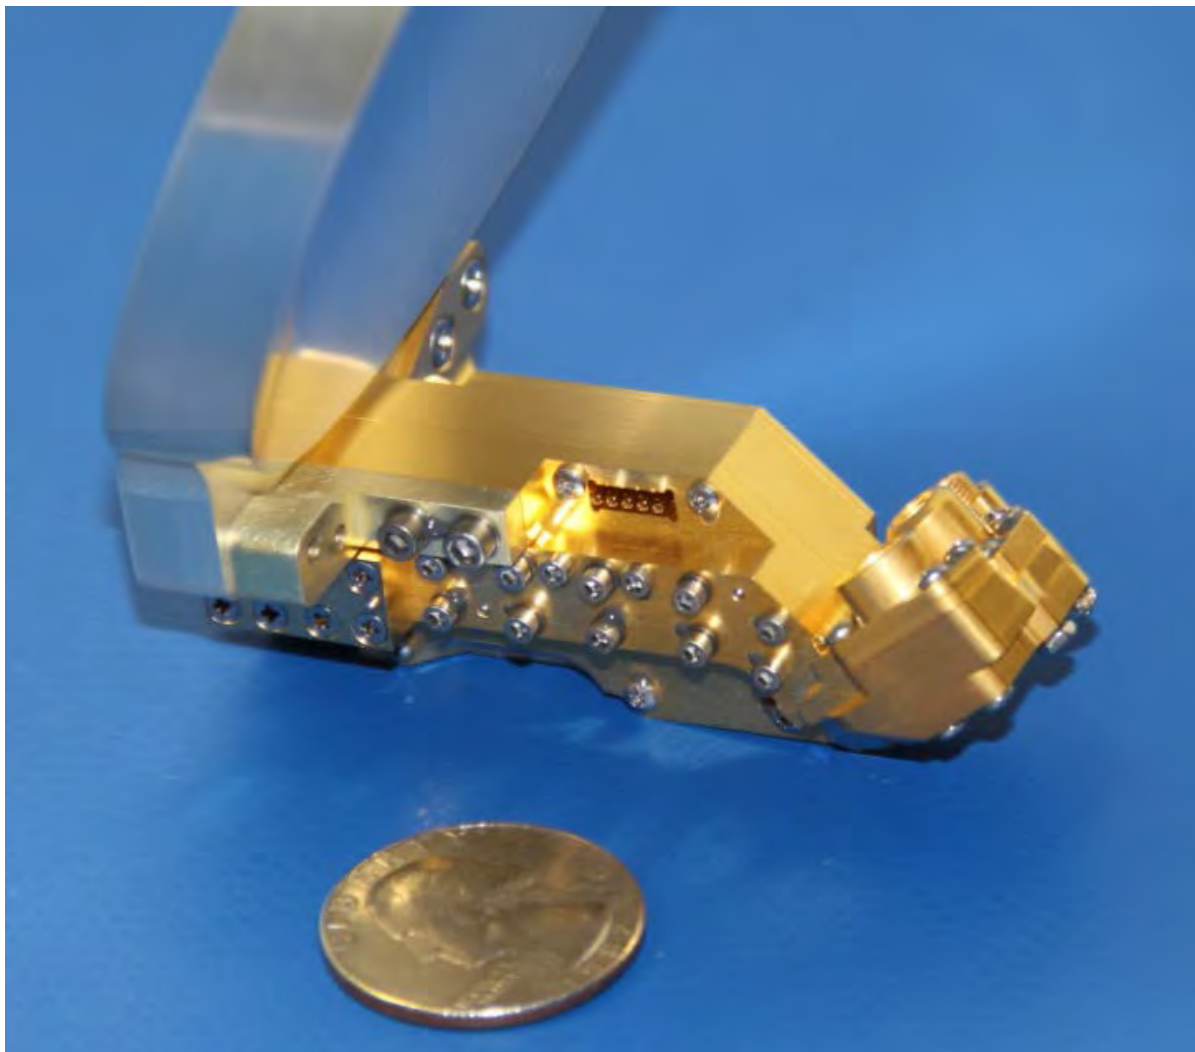


Receiver Temperature

700 K near 183 GHz

2000 K at 207 GHz




Space Vehicle Cutaway

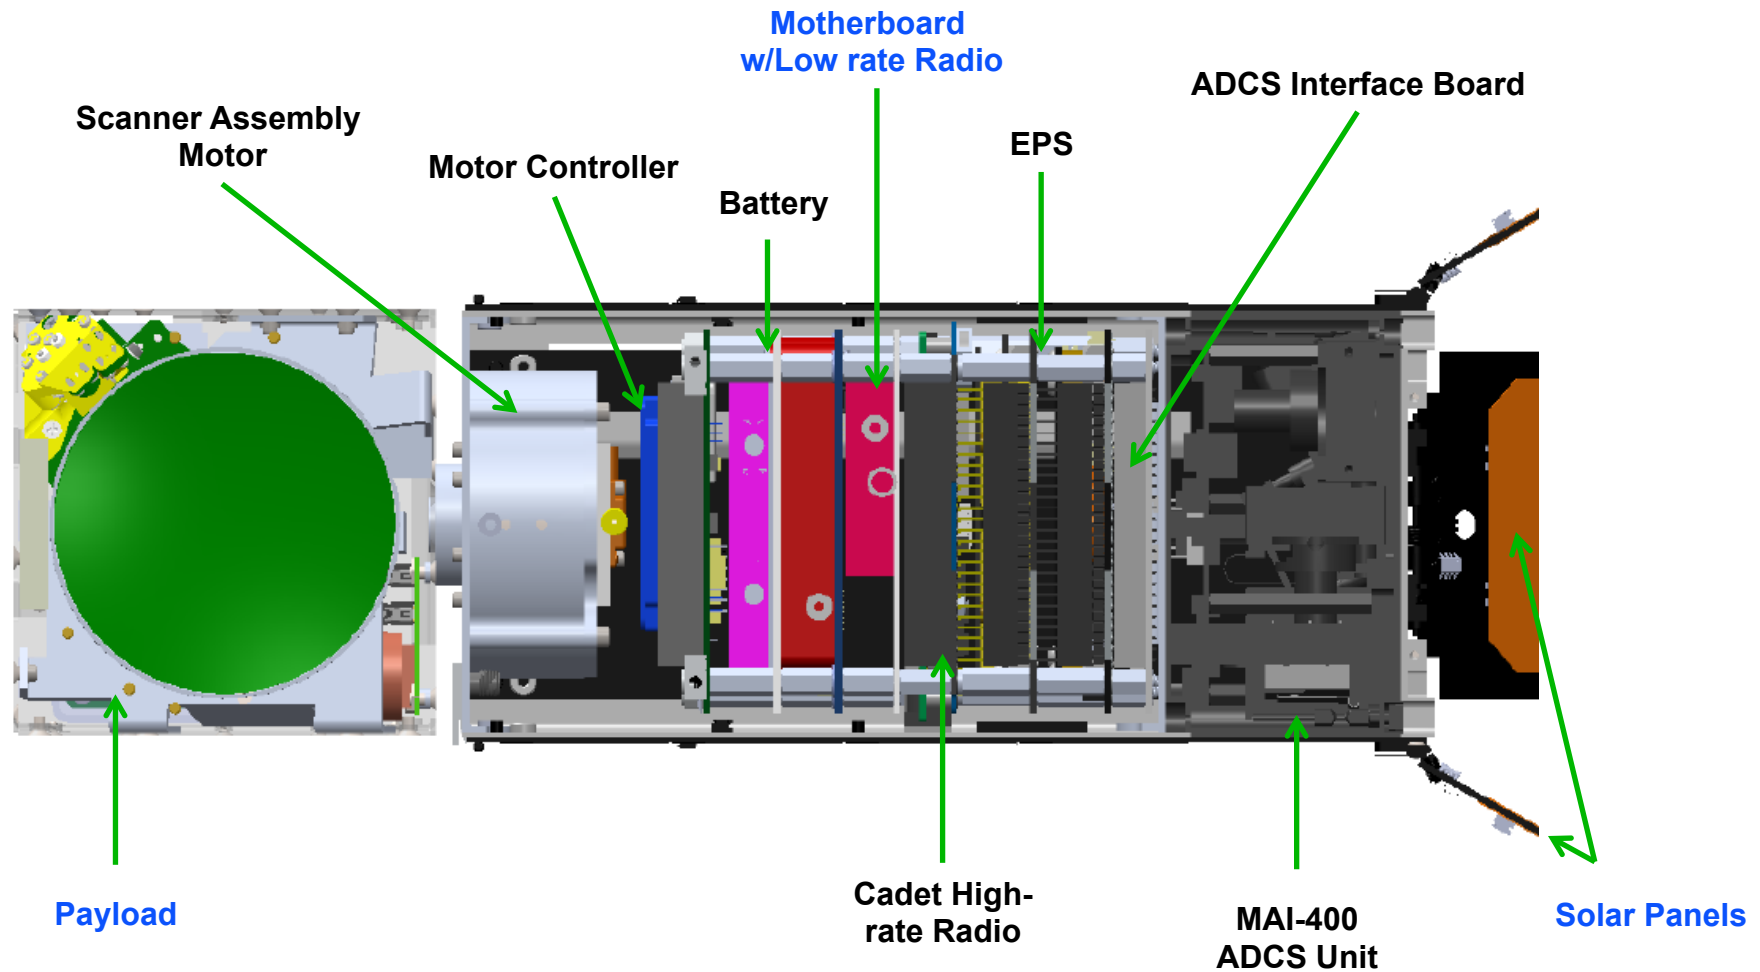



Microwave Radiometer Technology Acceleration (MiRaTA)


- 3U (10 cm x 10 cm x 34 cm) tri-band radiometer
 - Temperature, water vapor, and cloud ice
 - Absolute calibration better than 1 K
- Calibration proof of concept using limb measurements and GPS-RO
 - 60, 183, and 206 GHz; OEM628 GPS
- Funded by NASA Earth Science Technology Office (ESTO)
- \$3.6M
- 30-month build (Oct. 2013 – Mar. 2016)
- Launch in late 2016

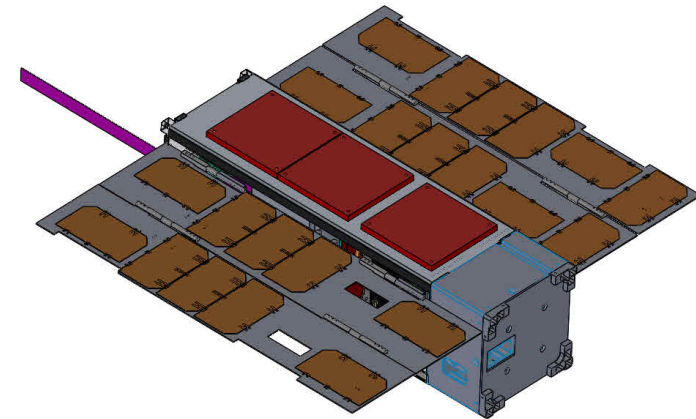

- 4.5 kg total mass
- 10 W avg power
- 10 kbps max data rate
- 0.5° pointing accuracy



MiRaTA Radiometer System

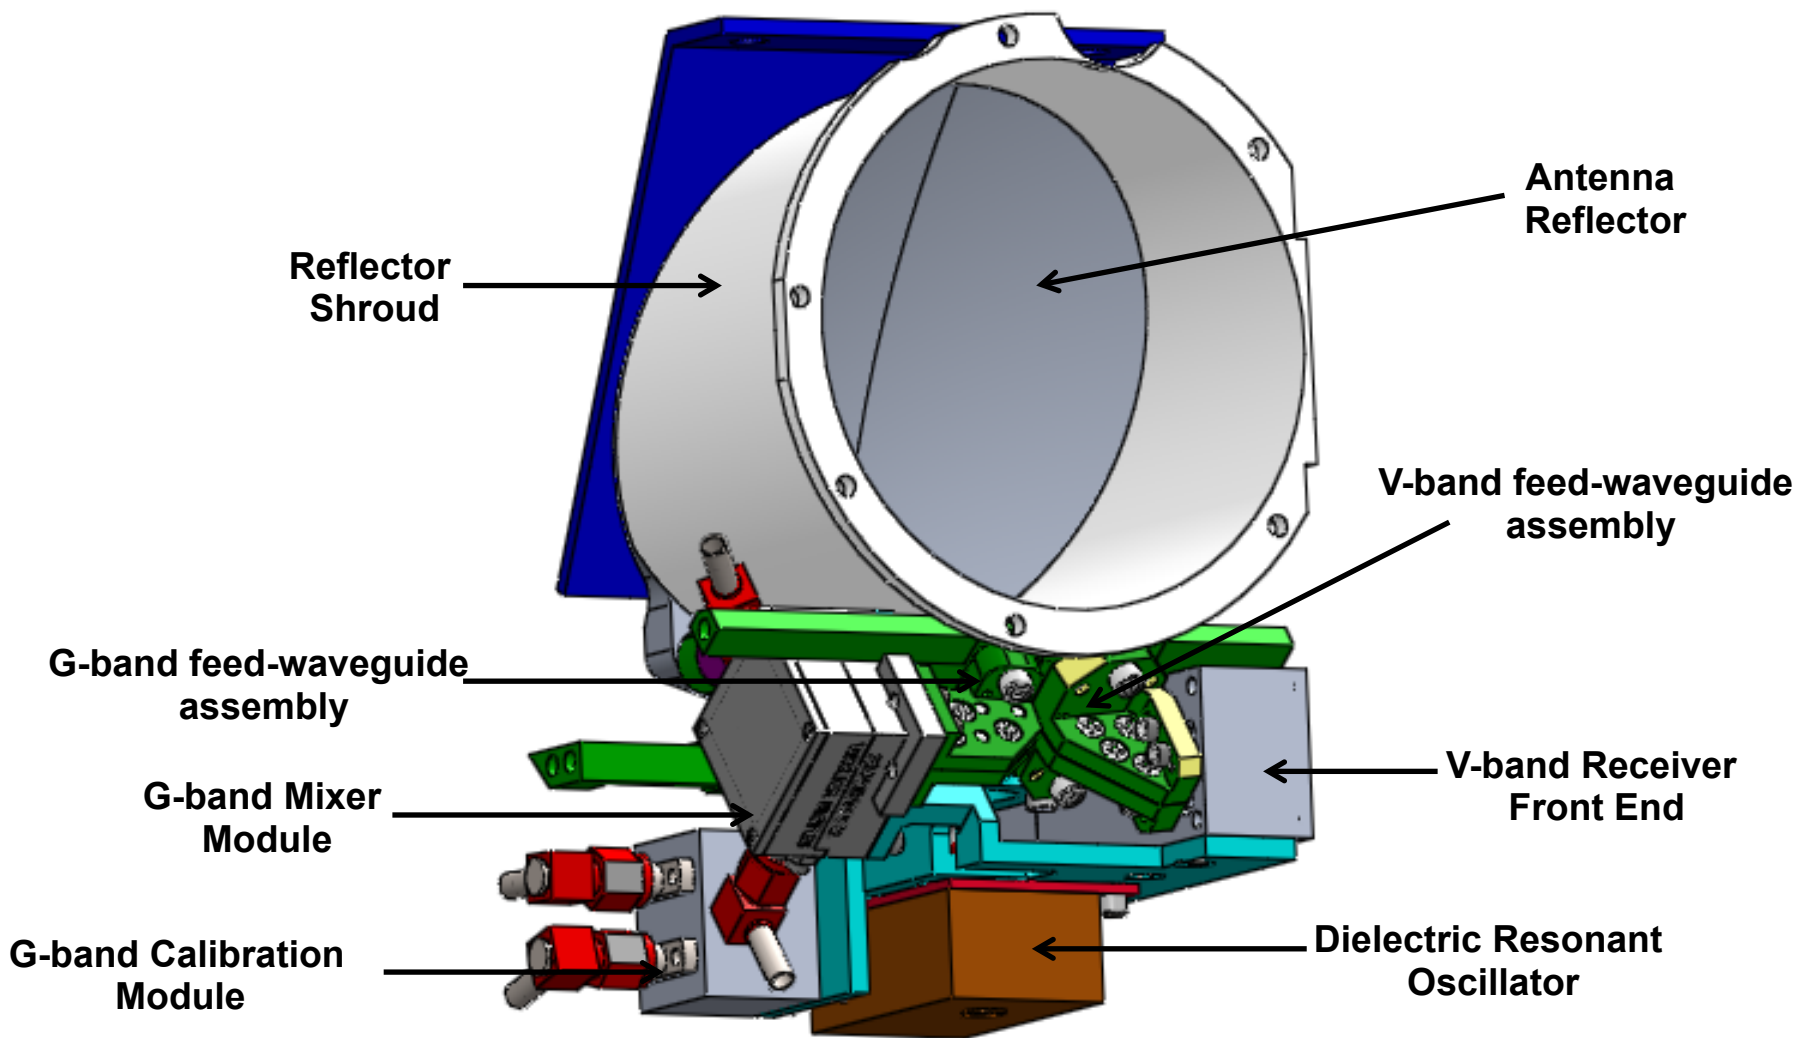



Outline

- Introduction and Motivation
- Foundational Work: MicroMAS-1, MicroMAS-2, and MiRaTA
- **The Next Step: EON-MW**
- Summary


MicroMAS = Microsized Microwave Atmospheric Satellite

MiRaTA = Microwave Radiometer Technology Acceleration

EON-MW = Earth Observing Nanosatellite-MicroWave



Earth Observing Nanosatellite

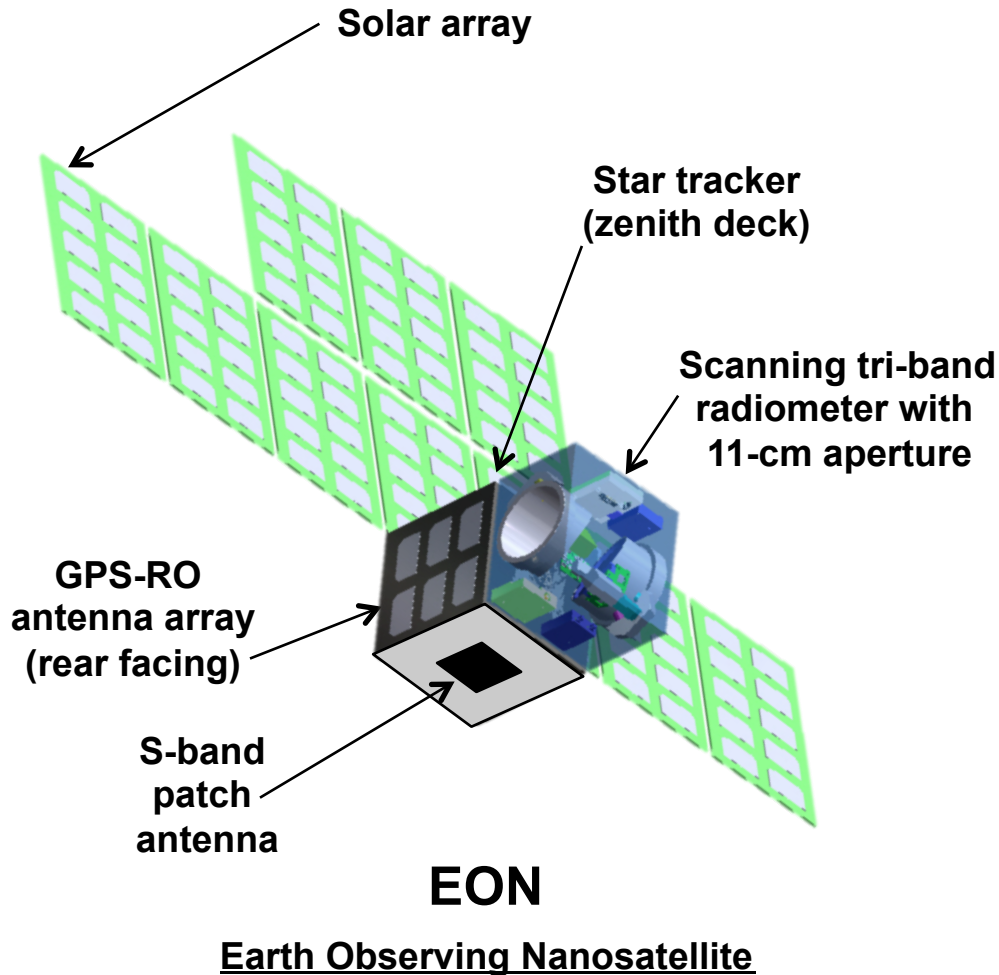

- All the features of MicroMAS (wide swath) and MiRaTA (sensitivity)
- 12U cubesat (21x21x34 cm)
- Larger aperture (improved spatial resolution)
- 23/31 + 50-60/88 + 166/183 GHz
22 ATMS-equivalent channels
- 2-3 year mission lifetime
- Data downlink using S-band




EON Spacecraft Requirements

- **Pointing**
 - 0.1-degree (3-sigma) pointing knowledge
 - 0.5-degree (3-sigma) pointing control
 - Expected performance: ~Five times better than requirement
- **Power**
 - 48 W (avg) power required
 - Solar array to provide 60 W (avg) at end of life (three years)
- **Communications**
 - Average data rate 50 kbps
 - S-band radio downlinks all data at 100 seconds per orbit
- **Lifetime**
 - Two years (threshold); >three years (goal)
 - Rad hard/tolerant parts used; TID below 10 krad at three years
 - Scanning assembly lifetime tested to >50M revs (>three years)




EON System Block Diagram & Heritage

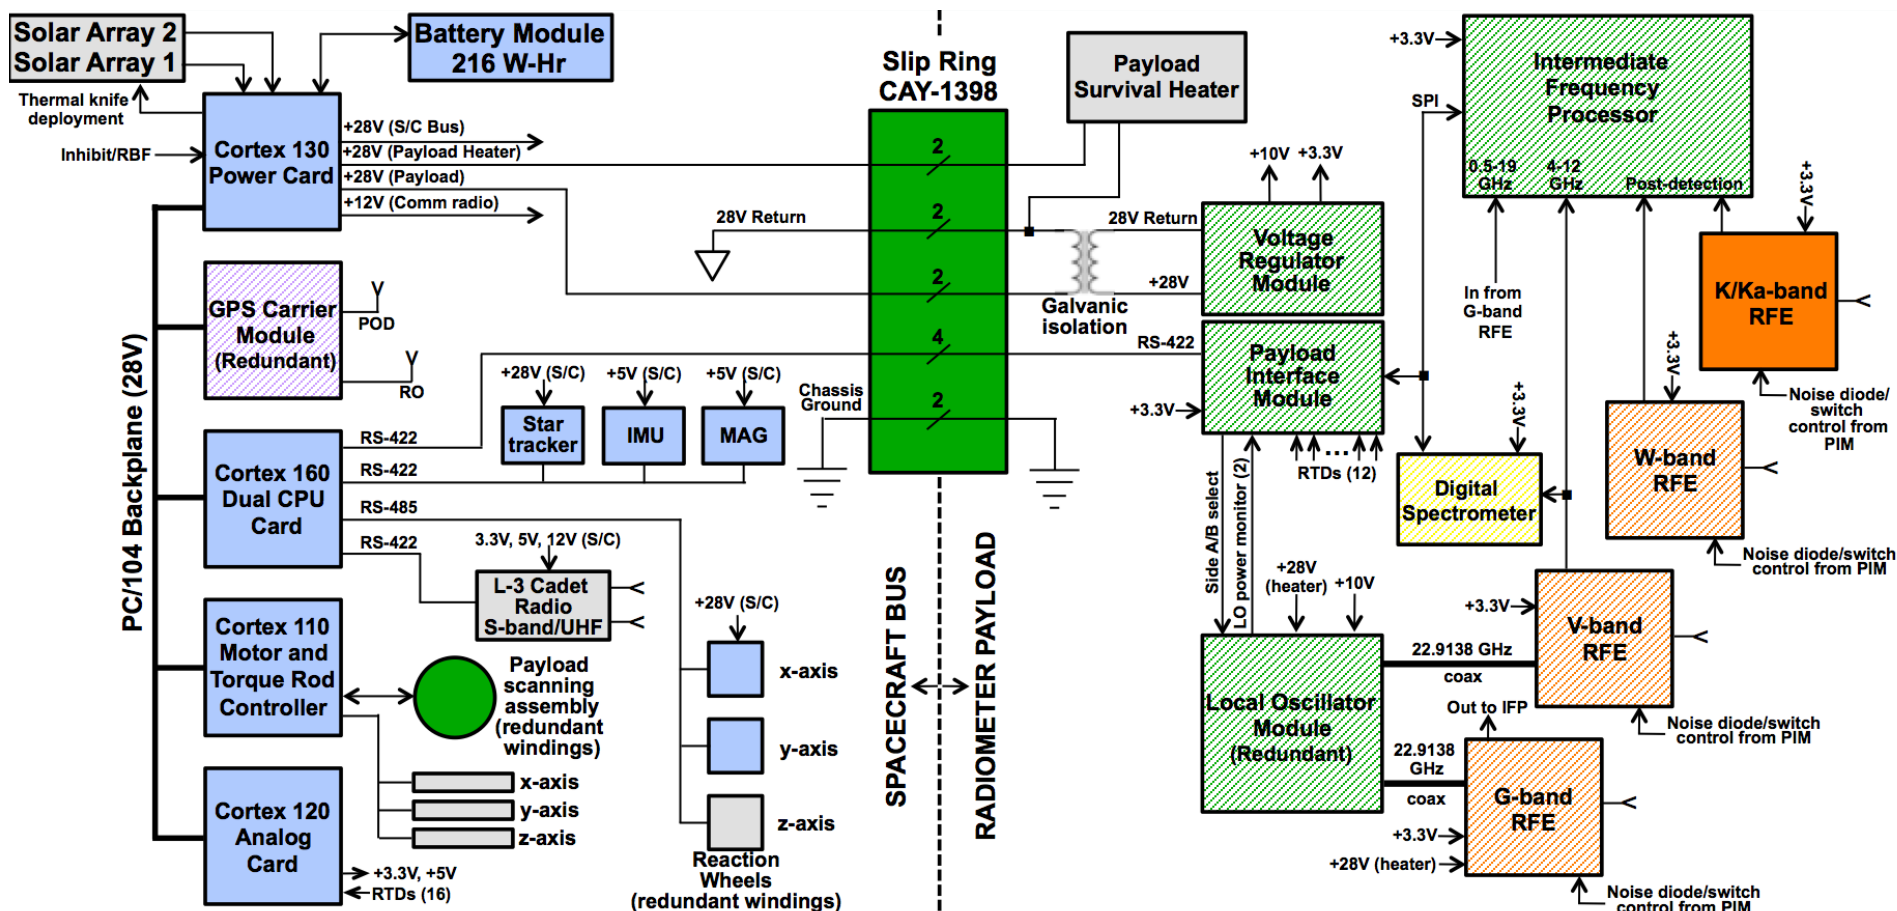



EON Payload

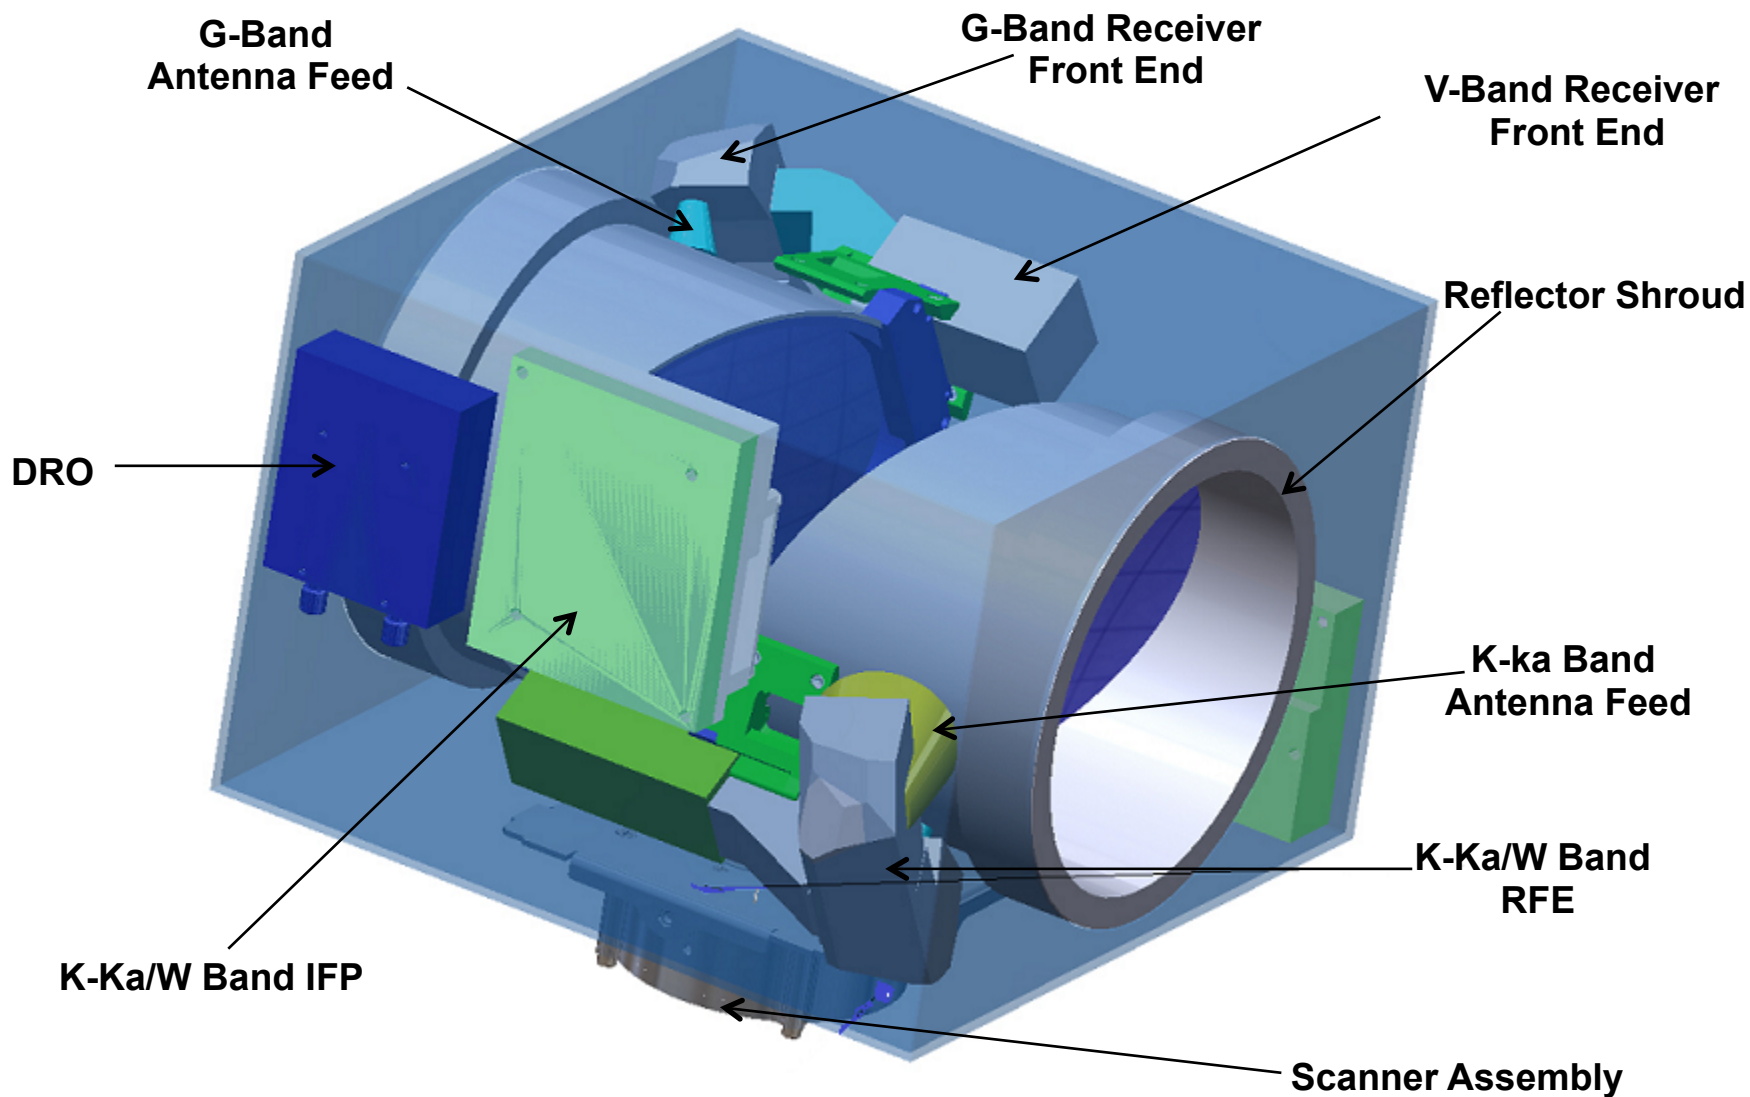



EON Scanning Assembly Motor

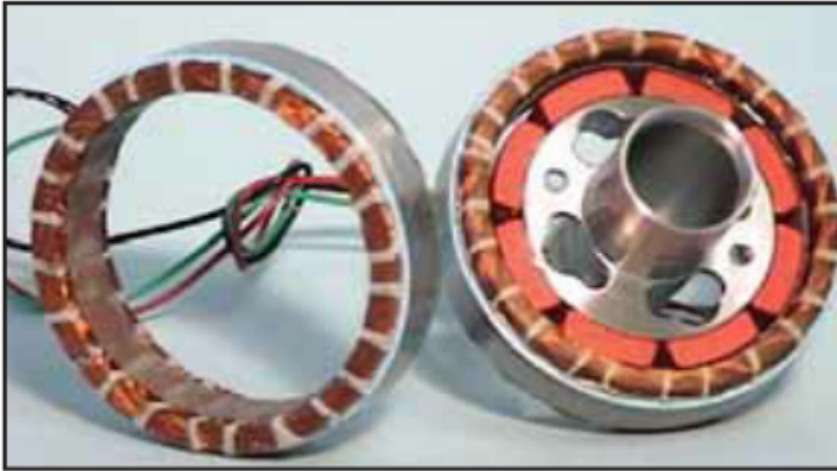


Image courtesy of Aeroflex, Inc

Note: Image of generic Aeroflex BLDC motor

Space Qualified Aeroflex Zero-Cogging Brushless DC Motor


- Part no: Z-0250-050-3-104
- 2.5in O.D., 1.5in I.D., 1in height
- Mass: 163g
- Nominal operating power: 0.020 W
- Lifetime tested to >50M rotations (> 3yr EON life)
- Redundant windings



EON Avionics


Andrews Space 100 Series

Model 160 Flight Computer	Processor	Xilinx Virtex 4FX with dual PPC
	Memory	64 MB of SDRAM 2 GB of Flash 1 Mb of EEPROM (x3)
	Operating System	Real Time Linux
Model 140 Communication Card	Supported Interfaces	Ethernet, SPI, I2C, RS-232, RS-422, RS-485, 1553B, JTAG
Model 130 Electrical Power System	Solar Panel Interface	6 Battery Control Regulators Peak Power Tracker
	Battery Interface	7.2 V Lithium Ion
Model 120 Instrumentation Card	A/D Converter	16-bit
	I/O	16 Analog Inputs 2 Analog Outputs 8 Opto-Isolated Digital I/O
Model 110 Motor/Valve Driver Cards	Driver Circuit	36 Channels/ 12 per card (2A/channel)

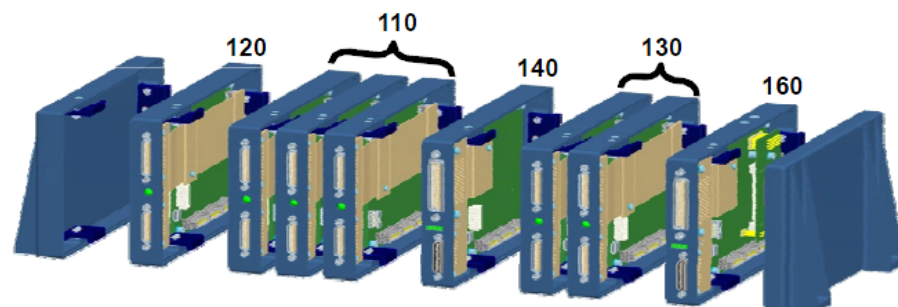



EON GNC Components

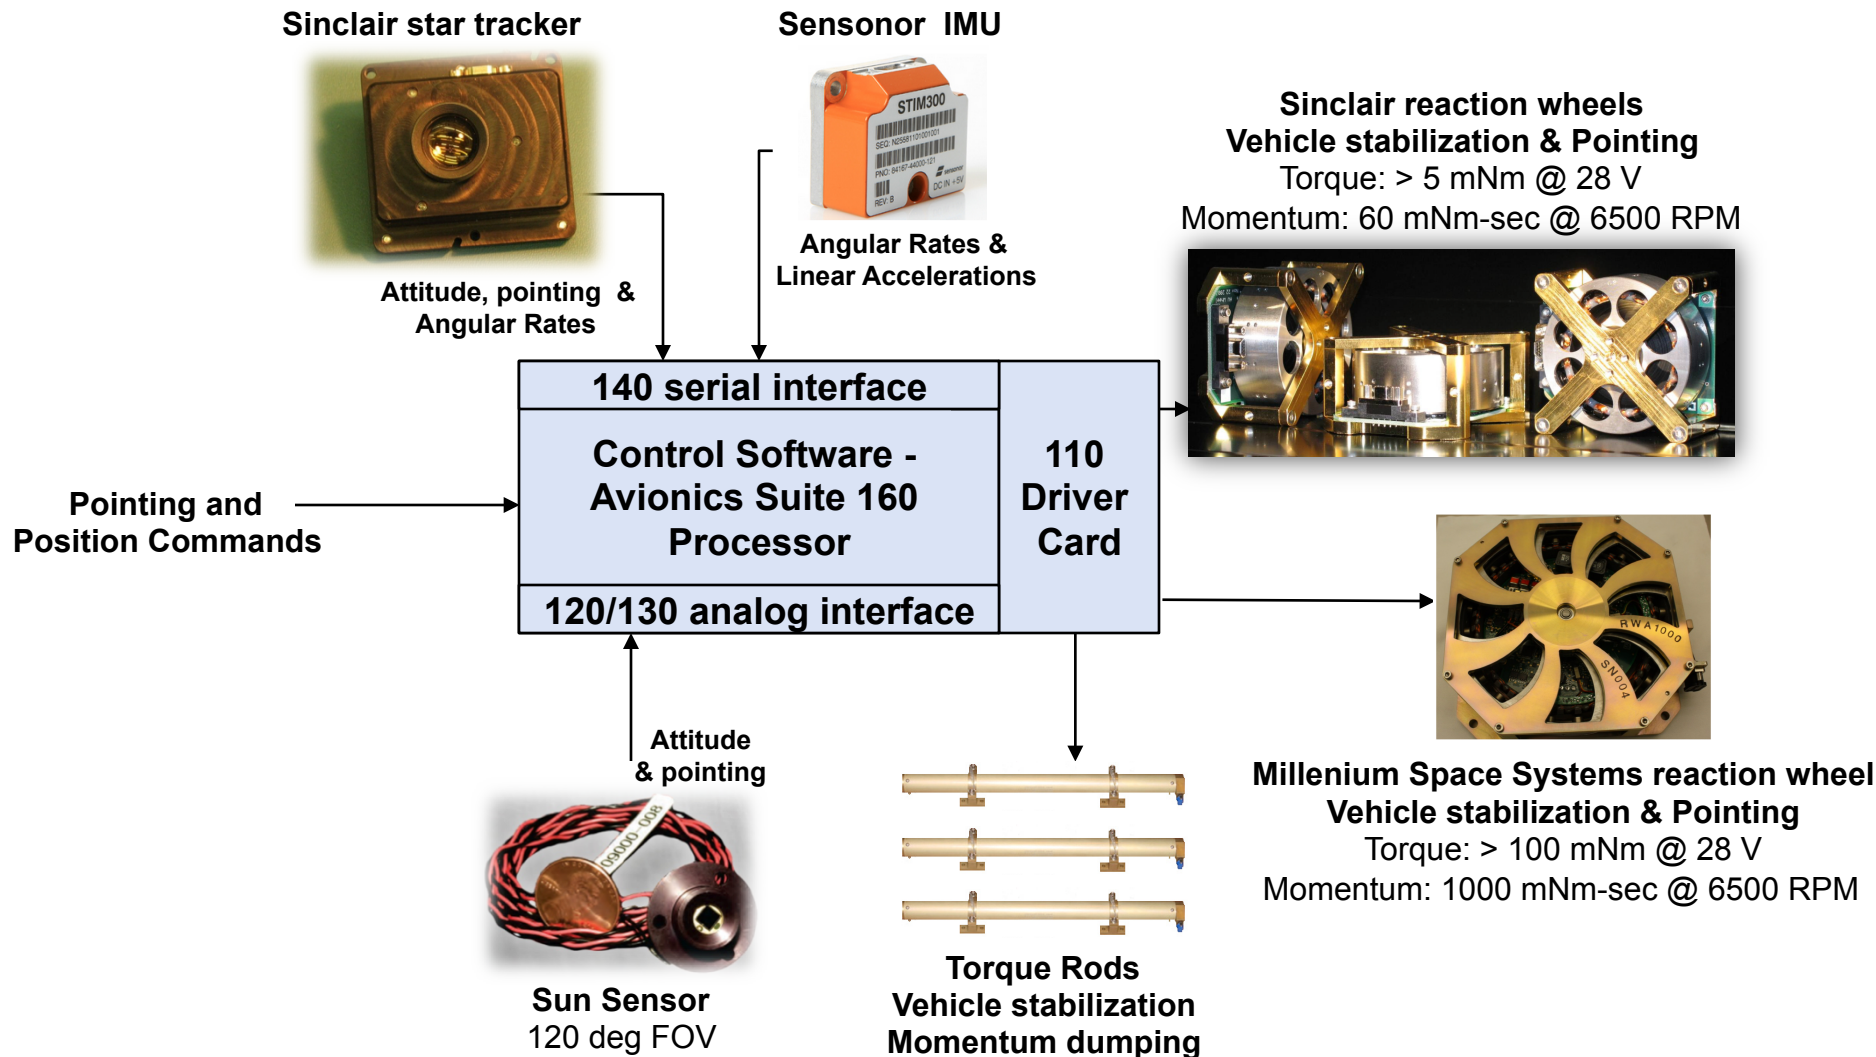



Summary and Path Forward

- **Nanosatellite sounders could provide unprecedented performance at relatively low cost and risk**
- **MicroMAS missions demonstrate core technologies**
- **Pre-launch testing has indicated excellent performance**
 - 40 RPM scanning; 2W payload power consumption
 - Accuracy and NEDT meet requirements
- **MicroMAS-2: Commercially procured launch for Fall 2016**
- **Microwave Radiometer Technology Acceleration (MiRaTA)**
 - Next generation follow-on with multiple bands (temp. and water)
 - 2016 launch on JPSS-1
- **EON-MW could potentially demonstrate ATMS-like quality on a low-cost CubeSat**
 - If proven, this would be a revolutionary advancement!

Backup Slides




EON Mass Budget (Mostly Measured Values)

	Mass (kg)	
Microwave payload	4	
Rotary motor/slipring	0.47	
GPS antennas	0.5	
Avionics	0.472	
Batteries	1.8	
Small reaction wheels	0.45	
Large wheel	0.97	
Torque bars	1	
Magnetometer	0.2	
Sun Sensor	0.05	
Star Tracker	0.085	
Deployable solar array	2.45	
Structure (Bus)	5	
Cables and connectors	1	
GPS receiver	0.25	
Radio (L-3 Cadet)	0.3	
Total	18.997	20% Margin (24 kg max)



Dose depth curve for a 5 year LEO polar mission (800km, 98deg)

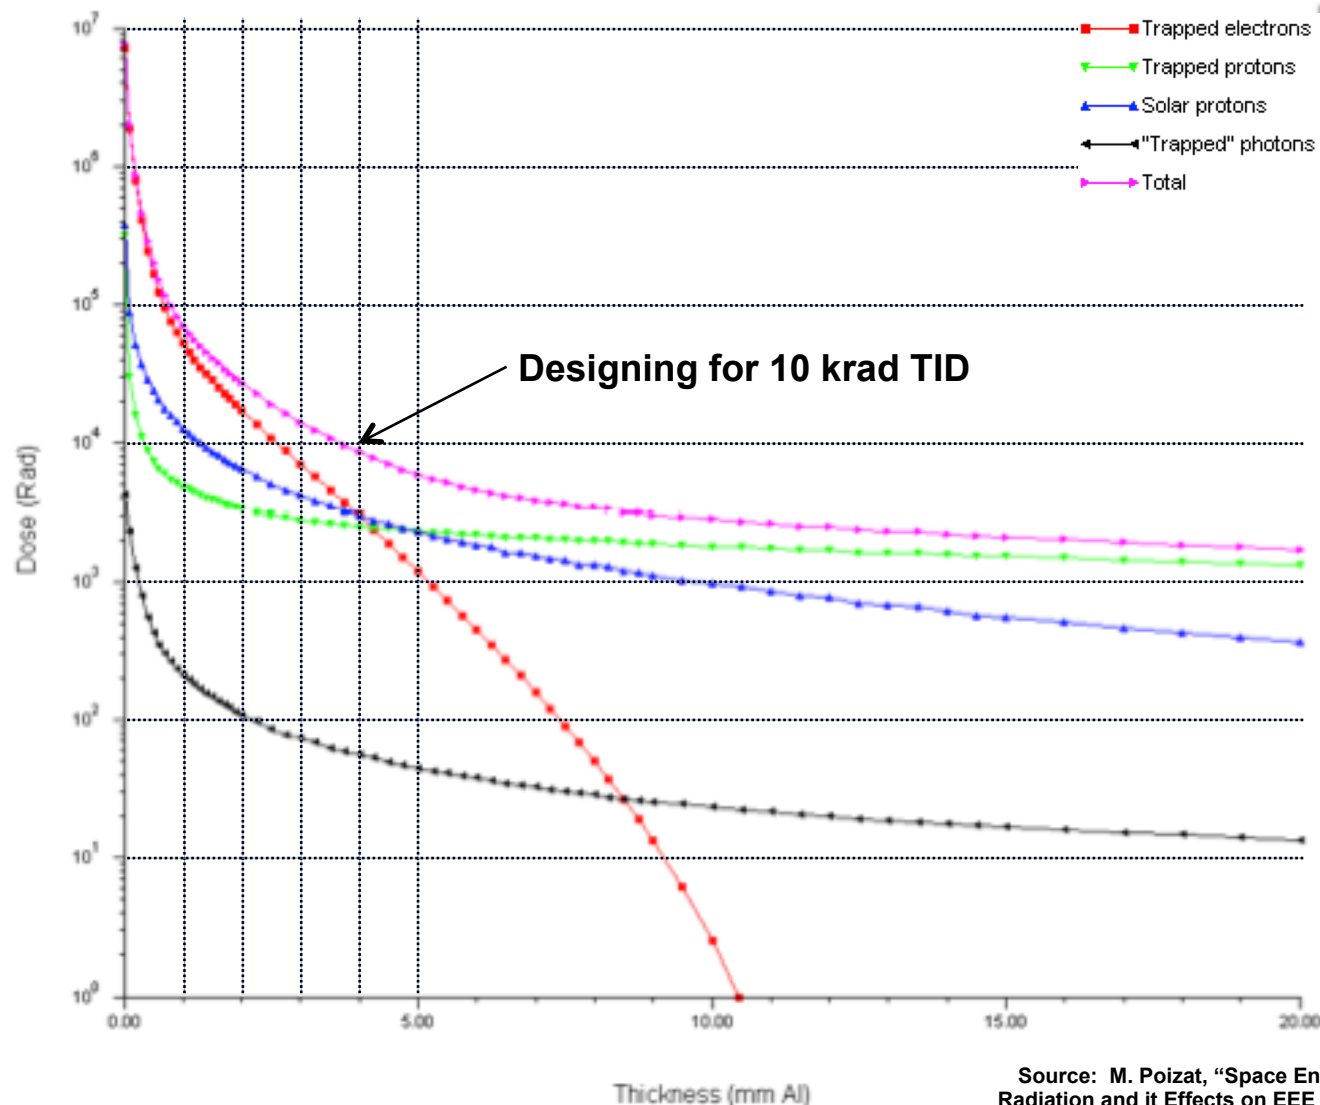

Source: M. Poizat, "Space Environment and Effects," Space Radiation and its Effects on EEE Components, EPFL June 9, 2009.



EON Payload Power Budget

Component	Power (W)	Duty Cycle (%)	Avg Power (W)
G RFE	2.4	100	2.4
V RFE	1.9	100	1.9
K/Ka RFE	2.125	100	2.125
W RFE	0.375	100	0.375
V Digital	4.375	50	2.188
V PDRO	2.875	100	2.875
Thermal control	6.25	100	6.25
PIM	1.25	100	1.25
IFP	2.8125	100	2.8125
GPSRO	2.5	20	0.5
Total			22.675

Power regulation inefficiencies included above.



EON Bus Power Budget

Component	Power (W)	Duty Cycle (%)	Avg Power (W)
Cortex 110	1.3	100	1.3
Cortex 120	1.5	100	1.5
Cortex 130	3.3	100	3.3
Cortex 150	2	100	2
Cortex 160	10	100	10
ST-16	0.5	100	0.5
RW3-0.60	1	100	1
RW3-1.0	2	100	2
Scanning assembly	1	100	1
Comm	10	5	0.5
IMU	1.5	100	1.5
Total			24.6

Power regulation inefficiencies included above.



EON Power Budget

- **Payload: 22.7 W**
- **Bus: 24.6 W**
- **Total: 47.3 W**

- **Available from solar array at end-of-life (11:30 orbit): 55 W**

- **Margin: 16 %**



Solar Array Based on ISARA Design Available from Pumpkin, Inc.

